San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

HEALTHY AIR LIVING™

NOV 10 2016

Mr. Gregory Pritchett
Chevron USA Inc
PO Box 1392
Bakersfield, CA 93302

Re: Proposed ATC / Certificate of Conformity (Significant Mod)
District Facility # C-311
Project # 1161067

Dear Mr. Pritchett:

Enclosed for your review is the District's analysis of an application for Authority to Construct for the facility identified above. You requested that a Certificate of Conformity with the procedural requirements of 40 CFR Part 70 be issued with this project. The project authorizes tank modifications.

After addressing all comments made during the 30-day public notice and the 45-day EPA comment periods, the District intends to issue the Authority to Construct with a Certificate of Conformity. Please submit your comments within the 30-day public comment period, as specified in the enclosed public notice. Prior to operating with modifications authorized by the Authority to Construct, the facility must submit an application to modify the Title V permit as an administrative amendment, in accordance with District Rule 2520, Section 11.5.

If you have any questions, please contact Mr. Leonard Scandura, Permit Services Manager, at (661) 392-5500.

Thank you for your cooperation in this matter.

Sincerely,

Arnaud Marjollet
Director of Permit Services

Enclosures

cc: Tung Le, CARB (w/enclosure) via email
cc: Gerardo C. Rios, EPA (w/enclosure) via email

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585

www.valleyair.org www.healthyairliving.com

Printed on recycled paper.

San Joaquin Valley Air Pollution Control District
Authority to Construct Application Review
Modify Tank and VCS Permits to add Maintenance/Repair/Upset Provisions

Facility Name:	Chevron USA, Inc.	Date:	November 3, 2016
Mailing Address:	P.O. Box 1392	Engineer:	Richard Edgehill
	Bakersfield, CA 93302	Lead Engineer:	Dan Klevann
Contact Person:	Dan Beck		
Telephone:	661-654-7141		
E-Mail:	beckdl@chevron.com		
Application #:	C-311-146-23, -147-14, -150-14, -163-14 thru '-170-14, '-177-16, '-196-14 thru '-198-14, -236-8, '-267-4, '-267-5, '-268-2, '-271-1		
Project #:	C-1161067		
Deemed Complete:	April 6, 2016		

I. Proposal

Chevron USA Inc (CUSA) is requesting Authorities to Construct (ATCs) to allow for the following modifications at Oil Cleaning Plants (OCPs) 13D and 25D:

OCP 13 D

- Authorize disconnection of tanks C-311-146, -147, -150, -196, -197, -198, -236, and -271 from the vapor control system (VCS) listed on permit C-311-267 for up to 600 hr/yr (nonconsecutive hours), to allow the VCS to be inoperable for periods of maintenance and repair activities, process upsets, and equipment breakdowns.
- For emissions calculations, the VOC content of vapors processed by fugitive emissions components (pre-and post-project) is less than 10% by weight.
- Remove reference to TEOR operation C-311-112 from VCS permit C-311-267, as the TEOR operation is no longer connected to this VCS.
- Note that outstanding ATC C-311-267-3 authorizes including tank '-171 as sharing the '-267 vapor control system. Because this ATC may or may not be implemented before the proposed ATCs, ATC '-267-4 will lower the VOC content limit to 10% by weight, authorize tank 600 hr/yr tank maintenance, but will not list tank '-171 as sharing the vapor control system.

OCP 25 D

- Authorize disconnection of tanks C-311-163 through '-170 and -177 from the VCS listed on permit C-311-268 for up to 600 hr/yr (nonconsecutive hours), to allow the VCS to be inoperable for periods of maintenance and repair activities, process upsets, and equipment breakdowns.

- For emissions calculations, the VOC content of vapors processed by fugitive emissions components (pre-and post-project) is less than 10% by weight.

Disposition of Outstanding ATCs

ATCs C-311-267-1 and -264-0 (new tank connected to existing VCS) have been issued. Applicant has stated that the ATCs probably will not be implemented (9/22/16 email).

ATCs C-311-267-3 and -271-0 (new tank connected to existing VCS) have been issued but, as stated above, may not be implemented before the proposed project.

ATCs C-311-267-3 and -271-0 and current PTOs are included in **Attachment I**.

CUSA has a Title V Permit. This modification can be classified as a Title V significant modification pursuant to Rule 2520, and can be processed with a Certificate of Conformity (COC). Since the facility has specifically requested that this project be processed in that manner, the 45-day EPA comment period will be satisfied prior to the issuance of the Authority to Construct. CUSA must apply to administratively amend their Title V permit.

II. Applicable Rules

Rule 2201 New and Modified Stationary Source Review Rule (2/18/16)
Rule 2410 Prevention of Significant Deterioration (6/16/11)
Rule 2520 Federally Mandated Operating Permits (6/21/01)
Rule 4001 New Source Performance Standards (4/14/99)
Rule 4101 Visible Emissions (02/17/2005)
Rule 4401 Steam-Enhanced Crude Oil Production Wells (06/16/11)
Rule 4102 Nuisance (12/17/92)
Rule 4623 Storage of Organic Liquids (5/19/05)
CH&SC 41700 Health Risk Assessment
CH&SC 42301.6 School Notice
Public Resources Code 21000-21177: California Environmental Quality Act (CEQA)
California Code of Regulations, Title 14, Div 6, Chap 3, Sections 15000-15387: CEQA Guidelines

III. Project Location

The tanks and VCSs at Chevron's 13D and 25D OCPs are located at Chevron's Western Coalinga Oilfield in Fresno County in the North half of Section 13 and NW/4 Sec 25 of Township 20S, Range 14E (MDB&M). The C-311 facility is included in Chevron's Fresno County Heavy Oil Stationary Source.

The District has verified that the equipment is not located within 1,000 feet of the outer boundary of a K-12 school. Therefore, the public notification requirement of California Health and Safety Code 42301.6 is not applicable to this project. The following table summarizes the location for permit units involved with this project:

Permit	Section	Township	Range
13D OCP	NW & NE Section 13	20S	14E
C-311-146			
C-311-147			
C-311-150*			
C-311-196			
C-311-197			
C-311-198			
C-311-236*			
C-311-271			
C-311-267			
25D OCP	NW Section 25	20S	14E
C-311-163*			
C-311-164*			
C-311-165			
C-311-166			
C-311-167			
C-311-168			
C-311-169			
C-311-170			
C-311-177*			
C-311-268			

*front line tanks

IV. Process Description

CUSA uses steam injection in their heavy oil wells to assist with oil extraction by lowering the viscosity of the oil which reduces the energy required to pump oil to the surface. Thermally enhanced crude oil production is routed to the 13D and 25D oil cleaning plants (OCPs) to remove water and sediments prior to custody transfer of the crude oil. The tanks at the 13D setting are currently served by a shared vapor control system listed on permit C-311-267. The tanks at the 25D setting are currently served by a shared vapor control system listed on permit C-311-268.

Closed Casing Vent and Normal Operation of TEOR Wells

The subject 13D OCP and 25D OCP tanks receive oil from TEOR wells operating as "closed" or "normal". With closed operation, 13D wells (C-311-77, '-78, '-83, and 111) and 6C wells (C-311-112) or 25D wells (C-311-79) may operate with closed casing vents with (entrained) gas and liquid sent in the same piping directly to the crude oil storage tanks. With normal operation, casing gas is separated from liquid upstream of the tanks receiving the oil (applicant 6-6-16 email).

Note that applicant has proposed a permit condition stating that 13D OCP front line tanks (C-311-150 and '-236) and 25D OCP front line tanks (C-311-163, '-164, and '-177) be connected to vapor control during closed casing vent operation (TEOR wells

producing to tanks are operated with closed casing vents). The following condition has been added to ATCs for tanks C-311-150, '-163, '-164, '-177, and '-236.

Tank shall be connected to vapor control when receiving production from TEOR wells operated with closed casing vents. [District Rule 2201] N

13D OCP

Tank vapor recovery (TVR) permit C-311-267 includes the TVR equipment, and serves tanks C-311-146, '-147, '-150, '-196, '-197, '-198, '-236, '-264, and '-271. The TVR vapor piping is tied into the "SOx line" for disposal. Disposal options include SGs ('-20, '-21, '-25 '-28, '-30, '-36, '-37, '-38, '-39, '-40 and '-41), DOGGR disposal wells, or balance system.

25D OCP

TVR permit C-311-268 includes the TVR equipment, and serves tanks C-311-163, '-164, '-165, '-166, '-167, '-168, '-169, '-170 and '-177. The TVR vapor piping is tied into TEOR casing gas collection piping serving TEORs C-311-79. Disposal options include SGs ('-36, '-37, '-38, '-39, '-40 and '-41), DOGGR disposal wells, or balance system.

Process diagrams are included in **Attachment II**.

V. Equipment Listing

Pre-Project ATC Equipment Description

Section 13D OCP VCS and tanks:

ATC C-311-267-3 MODIFICATION OF 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-112, '-146, '-147, '-150, '-196, '-197, '-198, AND '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: CONNECT CRUDE OIL TANK C-311-271 TO VAPOR CONTROL SYSTEM, REDUCE VOC CONTENT LIMIT OF VAPORS FROM 60% TO 50% BY WT

C-311-146-22 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-23 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-147-13 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-22 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-150-13 5,103 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-18 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-196-13 5,000 BBL FIXED ROOF WASH TANK # 13-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-197-13 5,000 BBL FIXED ROOF WASH TANK # 13-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-198-13 270 BBL FIXED ROOF CRUDE OIL TANK # 13-13 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-236-7 5,100 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-19 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

ATC C-311-271-0 3,500 BBL FIXED ROOF CRUDE OIL STORAGE TANK (OR DISTRICT APPROVED EQUIVALENT), #13-13A SERVED BY SHARED VAPOR RECOVERY SYSTEM LISTED ON PERMIT UNIT C-311-267

Draft PTO C-311-271-2 2,000 BBL* FIXED ROOF CRUDE OIL STORAGE TANK, #13-13A SERVED BY SHARED VAPOR RECOVERY SYSTEM LISTED ON PERMIT UNIT C-311-267

*Corrected tank capacity

Section 25D OCP VCS and tanks:

C-311-268-1 25D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-163, '-164, '-165, '-166, '-167, '-168, '-169, '-170 AND '-177, INCLUDING 50 HP COMPRESSOR, TWO VERTICAL SCRUBBERS, FIN FAN COOLER, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS

C-311-163-13 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-31 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-164-13 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-32 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-165-13 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-166-13 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-167-13 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-33 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-168-13 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-34 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-169-13 1,424 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-60 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-170-13 1,901 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-37 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-177-16 5,047 BBL FIXED ROOF FREE WATER KNOCK OUT TANK # 25-42 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

Proposed ATC Modifications

Section 13D OCP VCS and tanks:

C-311-267-4 MODIFICATION OF 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-112, '-146, '-147, '-150, '-196, '-197, '-198, AND '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: ADD PROVISIONS FOR TANKS TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REMOVE REFERENCES TO PERMIT UNIT C-311-112 FROM EQUIPMENT DESCRIPTION AND PERMIT CONDITIONS, REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

New conditions to add to vapor control system permit C-311-267-4:

- *Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311*-146, -147, -150, -196, -197, -198, and -236 *for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit.*

- *Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight.*

Modified Condition 5 for vapor control system permit C-311-267-4:

- *The vapor recovery system may control the recovered well casing vapors from permit units C-311-77, '-78, '-83, and '-111, ~~and '-112~~ during operation of the casing collection system as a casing balance system.*

C-311-267-5 MODIFICATION OF 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-146, '-147, '-150, '-196, '-197, '-198, and '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: CONNECT CRUDE OIL TANK C-311-271 TO VAPOR CONTROL SYSTEM; ADD PROVISIONS FOR TANK C-311-271 TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOUR PER YEAR

New conditions to add to vapor control system permit C-311-267-5:

- *Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-*146, -147, -150, -196, -197, -198, -236, and -271 *for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit*

- *Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight.*

C-311-146-23 MODIFICATION OF 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-23 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

C-311-147-14 MODIFICATION OF 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-22 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

C-311-150-14 MODIFICATION OF 5,103 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-18 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

C-311-196-14 MODIFICATION OF 5,000 BBL FIXED ROOF WASH TANK # 13-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

C-311-197-14 MODIFICATION OF 5,000 BBL FIXED ROOF WASH TANK # 13-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR

C-311-198-14 MODIFICATION OF 270 BBL FIXED ROOF CRUDE OIL TANK # 13-13 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

C-311-236-8 MODIFICATION OF 5,100 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-19 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

C-311-271-1 MODIFICATION OF 2,000 BBL FIXED ROOF CRUDE OIL STORAGE TANK (OR DISTRICT APPROVED EQUIVALENT), #13-13A SERVED BY SHARED VAPOR RECOVERY SYSTEM LISTED ON PERMIT UNIT C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR. REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WT

New conditions to be added to tank permits C-311-146, -147, -150, -196, -197, -198, -236, and -271:

- *Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201].*

- *Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight.*

Section 25D OCP VCS and tanks:

C-311-268-2 MODIFICATION OF 25D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-163, '-164, '-165, '-166, '-167, '-168, '-169, '-170 AND '-177, INCLUDING 50 HP COMPRESSOR, TWO VERTICAL SCRUBBERS, FIN FAN COOLER, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: ADD PROVISIONS FOR TANKS TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR

New condition to add to vapor control system permit C-311-268-2:

- *Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-163, -164, -165, -166, -167, -168, -169, -170, and -177 for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit.*

C-311-163-14 MODIFICATION OF 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-31 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-164-14 MODIFICATION OF 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-32 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-165-14 MODIFICATION OF 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-166-14 MODIFICATION OF 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-167-14 MODIFICATION OF 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-33 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-168-14 MODIFICATION OF 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-34 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-169-14 MODIFICATION OF 1,424 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-60 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-170-14 MODIFICATION OF 1,901 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-37 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

C-311-177-17 MODIFICATION OF 5,047 BBL FIXED ROOF FREE WATER KNOCK OUT TANK # 25-42 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

New condition to be added to tank permits C-311-163, -164, -165, -166, -167, -168, -169, -170, and -177:

- *Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201}.*

- *Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Y*

Post-Project Equipment Description

Section 13D OCP VCS and tanks:

C-311-267-4 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-146, '-147, '-150, '-196, '-197, '-198, AND '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS

C-311-267-5 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-146, '-147, '-150, '-196, '-197, '-198, '-236, AND '-271, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS

C-311-146-23 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-23 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-147-14 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-22 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-150-14 5,103 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-18 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-196-14 5,000 BBL FIXED ROOF WASH TANK # 13-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-197-14 5,000 BBL FIXED ROOF WASH TANK # 13-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-198-14 270 BBL FIXED ROOF CRUDE OIL TANK # 13-13 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-236-8 5,100 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-19 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

C-311-271-1 2,000 BBL FIXED ROOF CRUDE OIL STORAGE TANK (OR DISTRICT APPROVED EQUIVALENT), #13-13A SERVED BY SHARED VAPOR RECOVERY SYSTEM LISTED ON PERMIT UNIT C-311-267

Section 25D OCP VCS and tanks:

C-311-268-2 25D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-163, '-164, '-165, '-166, '-167, '-168, '-169, '-170

AND '-177, INCLUDING 50 HP COMPRESSOR, TWO VERTICAL SCRUBBERS, FIN FAN COOLER, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS

C-311-163-14 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-31 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-164-14 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-32 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-165-14 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-166-14 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-167-14 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-33 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-168-14 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-34 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-169-14 1,424 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-60 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-170-14 1,901 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-37 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

C-311-177-17 5,047 BBL FIXED ROOF FREE WATER KNOCK OUT TANK # 25-42 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

VI. Emission Control Technology Evaluation

During maintenance and/or repair of the tank VCS, emissions will be minimized by keeping the tanks near constant level and returning the system to normal operation as quickly as possible to control the potential VOC emissions.

VII. General Calculations

A. Assumptions

- Facility operates 24 hours per day, 7 days per week, and 52 weeks per year
- Fugitive emissions are calculated using California Implementation Guidelines for Estimating Mass Emissions of fugitive Hydrocarbon Leaks at Petroleum Facilities, CAPCOA/CARB, February 1999 average emissions factors. Pursuant to District policy, VOC emissions are not assessed for components handling

heavy crude oil (API gravity <30 degrees). As components serving the subject permit units handle only heavy oil, only fugitive VOCs emitted from components in gas service are calculated.

- According to District Policy SSP 2015 (Procedures for Quantifying Fugitive VOC Emission Sources at Petroleum and SOCMI Facilities), VOC emissions from piping and components handling fluid streams with a VOC content of 10% or less by weight are considered negligible and not assessed.
- Pre- and post- project VOC content for components in gas service is 10% by weight (per applicant) and therefore by District policy SSP 2015, fugitive emissions are considered negligible and not assessed..
- When the tanks are disconnected from the VCS, they will operate at near constant level, so working losses are assumed to be zero. VOC emissions correspond to standing loss emissions only.
- When the tanks are disconnected from the VCS, they will receive oil with no entrained gas i.e. there will be no tank flashing losses during tank maintenance (applicant 6-6-16 email).
- VOC emissions from the tanks occur only when the VCS is disconnected which is up to a maximum of 600 hr/yr.
- Total annual VOC emissions corresond to standing loss emissions calculated in **Attachment III** multiplied by a factor of 600/8760 to account for only the time when the VCS is not operational.
- Uncontrolled emissions corresponding to disconnection of the tanks from the VCS are considered new emissions for the Federal Major Modification calculation.
- Pre-project emissions assigned to the tanks were based on uncontrolled tank emissions x (1 – control efficiency) i.e. (1 - .95). This method of calculating emissions from vapor controlled tanks is inconsistent with current District practice which requires emissions to be calculated using District- approved fugitive emissions factors. However, applicant has provided gas analyses indicating that the VOC content is less than 10 wt% and therefore fugitive emissions are assumed to be zero (**Attachment IV**).

B. Emission Factors

Uncontrolled tank emissions are calculated using the District tank calculation spreadsheet (based on EPA Tanks calculator).

Fugitive emissions are based on California Implementation Guidelines for Estimating Mass Emissions of fugitive Hydrocarbon Leaks at Petroleum Facilities, CAPCOA/CARB, February 1999. Emissions in this project are calculated using the "average" emissions factors.

C. Calculations

1. Pre-Project Potential to Emit (PE1)

Pre-Project Potential to Emit (PE1)		
	VOC - Daily PE1 (lb/day)	VOC - Annual PE1 (lb/yr)
13D		
ATC C-311-267-3	0	0
C-311-146-22	0	0
C-311-147-13	0	0
C-311-150-13	0	0
C-311-196-13	0	0
C-311-197-13	0	0
C-311-198-13	0	0
C-311-236-7	0	0
ATC C-311-271-0	0	0
25D		
C-311-268-1	0	0
C-311-163-13	0	0
C-311-164-13	0	0
C-311-165-13	0	0
C-311-166-13	0	0
C-311-167-13	0	0
C-311-168-13	0	0
C-311-169-13	0	0
C-311-170-13	0	0
C-311-177-16	0	0
Total	0	**0**

2. Post-Project Potential to Emit (PE2)

Post-Project Potential to Emit (PE2)		
	VOC - Daily PE2 (lb/day)	**VOC - Annual PE2 (lb/yr)***
13D		
C-311-267-4 or -5	0	0
C-311-146-23	0.3	121 x 600/8760 = 8
C-311-147-14	0.3	121 x 600/8760 = 8
C-311-150-14	1.3	478 x 600/8760 = 33
C-311-196-14	1.3	478 x 600/8760 = 33
C-311-197-14	1.3	478 x 600/8760 = 33
C-311-198-14	0.1	24 x 600/8760 = 2
C-311-236-8	4.9	1806 x 600/8760 = 124
C-311-271-1	1.1	411 x 600/8760 = 28
25D		
C-311-268-2	0	0
C-311-163-14	0.9	318 x 600/8760 = 22
C-311-164-14	0.9	318 x 600/8760 = 22
C-311-165-14	1.0	367 x 600/8760 = 25
C-311-166-14	1.0	367 x 600/8760 = 25
C-311-167-14	2.1	783 x 600/8760 = 54
C-311-168-14	2.1	783 x 600/8760 = 54
C-311-169-14	0.9	318 x 600/8760 = 22
C-311-170-14	1.3	458 x 600/8760 = 31
C-311-177-17	0.9	327 x 600/8760 = 22
Total		**546**

* annual emissions (based on 8760 hr/yr operation) are multiplied by 600/8760 for 600 hr/yr emissions

Emissions profiles are included in **Attachment V.**

3. Pre-Project Stationary Source Potential to Emit (SSPE1)

Pursuant to District Rule 2201, the Pre-Project Stationary Source Potential to Emit (SSPE1) is the Potential to Emit (PE) from all units with valid Authorities to Construct (ATC) or Permits to Operate (PTO) at the Stationary Source and the quantity of emission reduction credits (ERC) which have been banked since September 19, 1991 for Actual Emissions Reductions that have occurred at the source, and which have not been used on-site.

Facility emissions are already above the Offset and Major Source Thresholds for VOC; therefore, SSPE1 calculations are not necessary.

4. Post Project Stationary Source Potential to Emit (SSPE2)

Pursuant to District Rule 2201, the Post Project Stationary Source Potential to Emit (SSPE2) is the Potential to Emit (PE) from all units with valid Authorities to Construct or Permits to Operate at the Stationary Source and the quantity of emission reduction credits (ERC) which have been banked since 9/19/1991 for Actual Emissions Reductions that have occurred at the source, which have not been used on-site.

Facility emissions are already above the Offset and Major Source Thresholds for VOC; therefore, SSPE2 calculations are not necessary.

5. Major Source Determination

Rule 2201 Major Source Determination:

This source concedes it is an existing Major Source for VOC emissions and will remain a Major Source for VOC. No change in other pollutants are proposed or expected as a result of this project.

Rule 2410 Major Source Determination:

This source concedes it is an existing Major Source for PSD for at least one pollutant. Therefore the facility is an existing major source for PSD.

6. Baseline Emissions (BE)

The BE calculation (in lbs/year) is performed pollutant-by-pollutant for each unit within the project, to calculate the QNEC and if applicable, to determine the amount of offsets required. Pursuant to Section 3.7 of District Rule 2201, BE = PE1 for:

- Any unit located at a non-major source,
- Any highly-utilized emissions unit, located at a major source,
- Any fully-offset emissions unit, located at a major source, or
- Any clean emissions unit, located at a major source.

Pursuant to Rule 2201, Section 3.12, a Clean Emissions Unit is defined as an emissions unit that is "equipped with an emissions control technology with a minimum control efficiency of at least 95% or is equipped with emission control technology that meets the requirements for achieved-in-practice BACT as accepted by the APCO during the five years immediately prior to the submission of the complete application.

The subject emissions units are equipped with a vapor control system which is at least 95% effective. Therefore, Baseline Emissions (BE) are equal to the Pre-Project Potential to Emit (PE1) which equals zero.

7. SB 288 Major Modification

SB 288 Major Modification is defined in 40 CFR Part 51.165 as "any physical change in or change in the method of operation of a major stationary source that would result in a significant net emissions increase of any pollutant subject to regulation under the Act."

Since this facility is a major source for VOC, the project's PE2 is compared to the SB 288 Major Modification Thresholds in the following table in order to determine if the SB 288 Major Modification calculation is required.

SB 288 Major Modification Thresholds			
Pollutant	Project PE2 (lb/yr)	Threshold (lb/yr)	SB 288 Major Modification Calculation Required?
VOC	546	50,000	No

Since the project's PE2 is below the SB 288 Major Modification Thresholds for VOC this project is not an SB 288 major modification, and no further discussion is necessary.

8. Federal Major Modification

District Rule 2201 states that a Federal Major Modification is the same as a "Major Modification" as defined in 40 CFR 51.165 and part D of Title I of the CAA.

The determination of Federal Major Modification is based on a two-step test. For the first step, only the emission *increases* are counted. Emission decreases may not cancel out the increases for this determination.

For new emissions units, the increase in emissions is equal to the PE2 for each new unit included in this project.

The project's combined total emission increases are compared to the Federal Major Modification Thresholds in the following table.

Federal Major Modification Thresholds for Emission Increases			
Pollutant	**Total Emissions Increases (lb/yr)**	**Thresholds (lb/yr)**	**Federal Major Modification?**
NO_x	0	0	No
VOC	546	0	Yes
PM_{10}	0	30,000	No
SOx	0	80,000	No

Since there is an increase in VOC emissions, this project constitutes a Federal Major Modification and no further analysis is required.

Federal Offset Quantities:
The Federal offset quantity is only calculated only for the pollutants for which the project is a Federal Major Modification. The Federal offset quantity is the sum of the annual emission changes for all new and modified emission units in a project calculated as the potential to emit after the modification (PE2) minus the actual emissions (AE) during the baseline period for each emission unit times the applicable federal offset ratio. There are no special calculations performed for units covered by an SLC.

Only list pollutants for which the project is a Federal Major Modification and delete other pollutants. The calculated Federal offset quantity is entered into the Major Modification tracking spreadsheet under the heading "Federal Offset Quantity"

VOC **Federal Offset Ratio** **1.5**

Permit No.	**Actual Emissions (lb/year)**	**Potential Emissions (lb/year)**	**Emissions Change (lb/yr)**
	0	**528***	**528**
			0
			0
			0
		Net Emission Change (lb/year):	**528**
		Federal Offset Quantity: (NEC * 1.5)	**792**

*see table below

Post-Project Potential to Emit (PE2)			
	Actual Emissions (lb/day)	**Daily PE2 (lb/day)**	**VOC - Annual PE2 (lb/yr)**
C-311-267-4 or -5	0	0	0
~~**C-311-146-23***~~	~~0~~	~~0.3~~	~~121 x 600/8760 = 8~~
~~**C-311-147-14***~~	~~0~~	~~0.3~~	~~121 x 600/8760 = 8~~
C-311-150-14	0	1.3	478 x 600/8760 = 33
C-311-196-14	0	1.3	478 x 600/8760 = 33
C-311-197-14	0	1.3	478 x 600/8760 = 33
~~**C-311-198-14***~~	~~0~~	~~0.1~~	~~24 x 600/8760 = 2~~
C-311-236-8	0	4.9	1806 x 600/8760 = 124
C-311-271-1	0	1.1	411 x 600/8760 = 28
C-311-268-2	0	0	0
C-311-163-14	0	0.9	318 x 600/8760 = 22
C-311-164-14	0	0.9	318 x 600/8760 = 22
C-311-165-14	0	1.0	367 x 600/8760 = 25
C-311-166-14	0	1.0	367 x 600/8760 = 25
C-311-167-14	0	2.1	783 x 600/8760 = 54
C-311-168-14	0	2.1	783 x 600/8760 = 54
C-311-169-14	0	0.9	318 x 600/8760 = 22
C-311-170-14	0	1.3	458 x 600/8760 = 31
C-311-177-17	0	0.9	327 x 600/8760 = 22
Total			**528**

*daily emissions are less than 0.5 lb/day and therefore round to zero by District policy APR 1130, no offsets are required for these emissions units

9. Rule 2410 – Prevention of Significant Deterioration (PSD) Applicability Determination

Rule 2410 applies to any pollutant regulated under the Clean Air Act, except those for which the District has been classified nonattainment. The pollutants which must be addressed in the PSD applicability determination for sources located in the SJV and which are emitted in this project are: (See 52.21 (b) (23) definition of significant)

- Hydrogen sulfide (H2S)
- Total reduced sulfur (inlcuding H2S)
- Reduced sulfur compounds

I. Project Location Relative to Class 1 Area

As demonstrated in the "PSD Major Source Determination" Section above, the facility was determined to be an existing PSD Major Source. Because the project is not located within 10 km (6.2 miles) of a Class 1 area – modeling of the emission increase is not required to determine if the project is subject to the requirements of Rule 2410.

II. Project Emission Increase – Significance Determination

a. Evaluation of Calculated Post-project Potential to Emit for New or Modified Emissions Units vs PSD Significant Emission Increase Thresholds

As a screening tool, the post-project potential to emit from all new and modified units is compared to the PSD significant emission increase thresholds, and if the total potentials to emit from all new and modified units are below the applicable thresholds, no futher PSD analysis is needed.

PSD Significant Emission Increase Determination: Potential to Emit (tons/year)					
	NO_2	SO_2	CO	PM	PM_{10}
Total PE from New and Modified Units	0	0	0	0	0
PSD Significant Emission Increase Thresholds	40	40	100	25	15
PSD Significant Emission Increase?	N	N	N	N	N

As demonstrated above, because the post-project total potentials to emit from all new and modified emission units are below the PSD significant emission increase thresholds, this project is not subject to the requirements of Rule 2410 and no further discussion is required.

10. Quarterly Net Emissions Change (QNEC)

The QNEC is calculated to establish emissions that are used to complete the District's PAS emissions profile screen. The QNEC shall be calculated as follows:

QNEC = PE2 - PE1, where:

QNEC = Quarterly Net Emissions Change for each emissions unit, lb/qtr.
PE2 = Post Project Potential to Emit for each emissions unit, lb/qtr.
PE1 = Pre-Project Potential to Emit for each emissions unit, lb/qtr.

Using the values in Sections VII.C.2 and VII.C.6 in the evaluation above, quarterly PE2 and quarterly PE1 are shown below.

Quarterly Net Emissions Change				
	VOC PE2 (lb/yr)	VOC PE2 (lb/qtr)	VOC PE1 (lb/qtr)	VOC QNEC (lb/qtr)
13 D				
C-311-267-4	0	0	0	0
C-311-267-5	0	0	0	0
C-311-146-23	8	2	0	2
C-311-147-14	8	2	0	2
C-311-150-14	33	8	0	8
C-311-196-14	33	8	0	8
C-311-197-14	33	8	0	8
C-311-198-14	2	0	0	0
C-311-236-8	124	31	0	31
C-311-271-1	28	7	0	7
25D				
C-311-268-2	0	0	0	0
C-311-163-14	22	6	0	6
C-311-164-14	22	6	0	6
C-311-165-14	25	6	0	6
C-311-166-14	25	6	0	6
C-311-167-14	54	14	0	14
C-311-168-14	54	14	0	14
C-311-169-14	22	6	0	6
C-311-170-14	31	8	0	8
C-311-177-17	22	6	0	6

VIII. Compliance

Rule 2201 New and Modified Stationary Source Review Rule

A. Best Available Control Technology (BACT), Offsets and Public Notice

1. BACT Applicability

BACT requirements are triggered on a pollutant-by-pollutant basis and on an emissions unit-by-emissions unit basis for the following*:

a. Any new emissions unit with a potential to emit exceeding two pounds per day,
b. The relocation from one Stationary Source to another of an existing emissions unit with a potential to emit exceeding two pounds per day,
c. Modifications to an existing emissions unit with a valid Permit to Operate resulting in an AIPE exceeding two pounds per day, and/or

d. Any new or modified emissions unit, in a stationary source project, which results in an SB288 Major Modification or a Federal Major Modification, as defined by the rule.

*Except for CO emissions from a new or modified emissions unit at a Stationary Source with an SSPE2 of less than 200,000 pounds per year of CO.

a. New emissions units – PE > 2 lb/day

As discussed in Section I above, this project does not result in any new emission units. Therefore BACT, for new emissions units with PE > 2 lb/day is not triggered.

b. Relocation of emissions units – PE > 2 lb/day

As discussed in Section I above, there are no emissions units being relocated from one stationary source to another; therefore, BACT for relocation of emissions units with PE > 2 lb/day purposes is not triggered.

c. Modification of emissions units – AIPE > 2 lb/day

As discussed in Section I above, this project will result in the modification of emissions units. Therefore, a calculation of AIPE will be performed for each affected pollutant.

AIPE = PE2 – HAPE

Where,

AIPE = Adjusted Increase in Permitted Emissions, (lb/day)
PE2 = Post-Project Potential to Emit, (lb/day)
HAPE = Historically Adjusted Potential to Emit, (lb/day)

HAPE = PE1 x (EF2/EF1)

Where,
PE1 = The emissions unit's Potential to Emit prior to modification or relocation, (lb/day)
EF2 = The emissions unit's permitted emission factor for the pollutant after modification or relocation. If EF2 is greater than EF1 then EF2/EF1 shall be set to 1
EF1 = The emissions unit's permitted emission factor for the pollutant before the modification or relocation

AIPE = PE2 – (PE1 * (EF2 / EF1))

For the subject operation, EF1 = EF2

Therefore AIPE = PE2 – PE1

AIPE			
	VOC PE2 (lb/day)	VOC PE1 (lb/day)	AIPE (lb/day)
C-311-267-4, '-5	0	0	0
C-311-146	0.3	0	0.3
C-311-147	0.3	0	0.3
C-311-150	1.3	0	1.3
C-311-196	1.3	0	1.3
C-311-197	1.3	0	1.3
C-311-198	0.1	0	0.1
C-311-236	4.9	0	4.9
C-311-271	1.1	0	1.1
C-311-268	0	0	0
C-311-163	0.9	0	0.9
C-311-164	0.9	0	0.9
C-311-165	1.0	0	1.0
C-311-166	1.0	0	1.0
C-311-167	2.1	0	2.1
C-311-168	2.1	0	2.1
C-311-169	0.9	0	0.9
C-311-170	1.3	0	1.3
C-311-177	0.9	0	0.9

As demonstrated above, AIPE is greater than 2 lb/day for C-311-167, '-168, and '-236. BACT for AIPE greater than 2.0 lb/day purposes is triggered for these emissions units.

d. SB 288/Federal Major Modification

As discussed in Section VII.B.7 above, this project constitutes a Federal Major Modification for VOC emissions. Therefore, BACT is triggered for VOC for Federal Major Modification purposes for all emissions units with an emissions increase (C-311-150, '-196, '-197, '-236, '-271, '-163 thru '-170, and '-177).

2. BACT Guideline

There is not an existing BACT Guideline for disconnection of tank and TEOR vapor control systems for maintenance and repair activities, process upsets, and equipment breakdowns which is considered a highly unusual (nonroutine) activity. The project specific BACT analysis approved for project 1142757, which was similar to this project will be used.

3. Top-Down BACT Analysis

Pursuant to the attached Top-Down BACT Analysis (see **Attachment VI**), BACT has been satisfied with the following:

C-311-150, '-196, '-197, '-236, '-271, '-163 thru '-170, and '-177

VOC: Work practices to minimize VOC emissions including:

- Near constant level tank operation
- Use of operational P/V valve where possible
- Work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts
- Minimization of tank openings and liquid drainage from disconnects
- Inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work.

B. Offsets

1. Offset Applicability

Pursuant to Section 4.5.3, offset requirements shall be triggered on a pollutant by pollutant basis and shall be required if SSPE2 equals to or exceeds the offset threshold levels in Table 4-1 of Rule 2201.

CUSA is over the VOC offset threshold; therefore the quantity of offsets required will be calculated in the following section.

2. Quantity of Offsets Required

As seen above, the facility is an existing Major Source for VOC and the SSPE2 is greater than the offset threshold; therefore offset calculations will be required for this project.

Per Sections 4.7.1 and 4.7.3, the quantity of offsets in pounds per year for VOC is calculated as follows for sources with an SSPE1 greater than the offset threshold levels before implementing the project being evaluated.

Offsets Required (lb/year) = (Σ[PE2 – BE] + ICCE) x DOR, for all new or modified emissions units in the project,

Where,

PE2 = Post Project Potential to Emit, (lb/year)
BE = Baseline Emissions, (lb/year)
ICCE = Increase in Cargo Carrier Emissions, (lb/year)

DOR = Distance Offset Ratio, determined pursuant to Section 4.8

As calculated in Section VII.B.6 above, the Baseline Emissions (BE) from these emissions units are equal to the Pre-Project Potential to Emit (PE1) since they are Clean Emissions Units.

ICCE = 0 for all emissions units.

The table below shows the determination of offsets required (Σ[PE2 – BE])

VOC Offset Determination			
Permit	**PE2 (lb/yr)**	**BE (lb/yr)**	**PE2-BE (lb/yr)**
13D			
C-311-267	0	0	0
C-311-267	0	0	0
~~C-311-146*~~	~~8~~	~~0~~	~~8~~
~~C-311-147*~~	~~-8~~	~~0~~	~~-8~~
C-311-150	33	0	33
C-311-196	33	0	33
C-311-197	33	0	33
~~C-311-198*~~	~~2~~	~~0~~	~~2~~
C-311-236	124	0	124
C-311-271	28	0	28
Total			251
25D			
C-311-268	0	0	0
C-311-163	22	0	22
C-311-164	22	0	22
C-311-165	25	0	25
C-311-166	25	0	25
C-311-167	54	0	54
C-311-168	54	0	54
C-311-169	22	0	22
C-311-170	31	0	31
C-311-177	22	0	22
Total			277
Total			**528**

*emissions increase less than 0.5 lb/day are rounded to zero for offsets purposes according to District policy APR 1130.

As seen above, the facility is an existing Major Source for VOCs and the SSPE2 is greater than the offset thresholds. Therefore offsets calculations will be required for this project.

The quantity of offsets in pounds per year for VOCs is calculated as follows for sources with an SSPE1 greater than the offset threshold levels before implementing the project being evaluated.

Offsets Required (lb/year) = (Σ[PE2 – BE] + ICCE) x DOR, for all new or modified emissions units in the project,

Where,
PE2 = Post Project Potential to Emit, (lb/year)
BE = Baseline Emissions, (lb/year)
ICCE = Increase in Cargo Carrier Emissions, (lb/year)
DOR = Distance Offset Ratio, determined pursuant to Section 4.8

BE = PE1 for:

- Any unit located at a non-Major Source,
- Any Highly-Utilized Emissions Unit, located at a Major Source,
- Any Fully-Offset Emissions Unit, located at a Major Source, or
- Any Clean Emissions Unit, Located at a Major Source.

otherwise,

BE = HAE

As calculated in Section VII.C.6 above, the BE from this unit is equal to the PE1 (0 lb/yr) since the unit is a Clean Emissions Unit. The project is a Federal Major Modification and therefore DOR = 1.5.

Also, there is only one emissions unit associated with this project and there are no increases in cargo carrier emissions. Therefore offsets can be determined as follows:

Offsets Required (lb/year) = ([PE2 – BE] + ICCE) x DOR

PE2 (VOCs) = 528 lb/year
BE (VOCs) = 0 lb/year
ICCE = 0 lb/year

Offsets Required (lb/year) = ([528] + 0) x 1.5
= 792 lb VOC/year

Calculating the appropriate quarterly emissions to be offset is as follows:

Quarterly offsets required (lb/qtr) = (792 lb VOC/yr) ÷ (4 quarters/year)

= 198 lb/qtr

Therefore the appropriate quarterly emissions to be offset are as follows:

1st Quarter	2nd Quarter	3rd Quarter	4th Quarter	Total Annual
198	198	198	198	792

The applicant has stated that the facility plans to use ERC certificates listed in the following table.

ERC #	Q1	Q2	Q3	Q4
C-1447-1	77	79	54	74
C-966-1	6	6	6	6
S-904-1*	158 (115)	421 (113)	346 (138)	272 (118)
Total	198	198	198	198

*Quantities in parentheses are reserved in for the project.

As seen above, the facility has sufficient credits to fully offset the quarterly VOC emissions increases associated with this project.

Proposed Rule 2201 (offset) Conditions:

S-382-267 (13D VCS)

Quarterly offsets: 251 lb/yr/4 = 62.75 lb/qtr with offsets adjusted as per APR 1010 (62 1st qtr, 63 2nd qtr, 63 3rd qtr, 63 4th qtr)

- *{GC# 4447 - edited} Prior to operating equipment under this Authority to Construct, permittee shall surrender VOC emission reduction credits for the following quantity of emissions: 1st quarter – 62 lb, 2nd quarter - 63 lb, 3rd quarter - 63 lb, and fourth quarter -63 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201]*

- *{GC# 1983} ERC Certificate Numbers C-1447-1, C-966-1, and S-904-1 (or a certificate split from this certificate) shall be used to supply the required offsets, unless a revised offsetting proposal is received and approved by the District, upon which this Authority to Construct shall be reissued, administratively specifying the new offsetting proposal. Original public noticing requirements, if any, shall be duplicated prior to reissuance of this Authority to Construct. [District Rule 2201]*

S-382-268 (25 D VCS)

Quarterly offsets: 277 lb/yr/4 = 69.25 lb/qtr with offsets adjusted as per APR 1010 (69 1st qtr, 69 2nd qtr, 69 3rd qtr, 70 4th qtr)

- *{GC# 4447 - edited} Prior to operating equipment under this Authority to Construct, permittee shall surrender VOC emission reduction credits for the following quantity of emissions: 1st quarter – 69 lb, 2nd quarter - 69 lb, 3rd quarter - 69 lb, and fourth quarter -70 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201]*

- *{GC# 1983} ERC Certificate Numbers C-1447-1, C-966-1, and S-904-1 (or a certificate split from this certificate) shall be used to supply the required offsets, unless a revised offsetting proposal is received and approved by the District, upon which this Authority to Construct shall be reissued, administratively specifying the new offsetting proposal. Original public noticing requirements, if any, shall be duplicated prior to reissuance of this Authority to Construct. [District Rule 2201]*

C. Public Notification

1. Applicability

Public noticing is required for:

a. New Major Sources, Federal Major Modifications, and SB 288 Major Modifications,
b. Any new emissions unit with a Potential to Emit greater than 100 pounds during any one day for any one pollutant,
c. Any project which results in the offset thresholds being surpassed, and/or
d. Any project with an SSIPE of greater than 20,000 lb/year for any pollutant.
e. Any project which results in a Title V significant permit modification

a. New Major Sources and Major Modifications

New Major Sources are new facilities, which are also Major Sources. Since this is not a new facility, public noticing is not required for this project for New Major Source purposes.

As demonstrated in Section VII.C.7, this project constitutes a Federal Major Modification; therefore, public noticing for Major Modification purposes is required.

b. PE > 100 lb/day

As discussed in Section 1 above, this project does not include a new emissions unit; therefore public noticing for PE > 100 lb/day purposes is not required.

c. Offset Threshold

Public notification is required if the SSPE is increased from below the offset threshold to a level exceeding the emissions offset threshold, for any pollutant. The applicant is already over the offset thresholds for VOCs (the only affected pollutant); therefore no thresholds were surpassed with this project and public noticing for offset purposes is not required.

d. SSIPE > 20,000 lb/year

Public notification is required for any permitting action that results in a Stationary Source Increase in Permitted Emissions (SSIPE) of more than 20,000 lb/year of any affected pollutant. According to District policy, the SSIPE is calculated as the Post Project Stationary Source Potential to Emit (SSPE2) minus the Pre-Project Stationary Source Potential to Emit (SSPE1), i.e. SSIPE = SSPE2 – SSPE1. The values for SSPE2 and SSPE1 are calculated according to Rule 2201, Sections 4.9 and 4.10, respectively.

The SSIPE is compared to the SSIPE Public Notice thresholds in the table below:

SSIPE Public Notice Thresholds			
	SSIPE (lb/year)	SSIPE Public Notice Threshold	Public Notice Required?
NOx	0	20,000 lb/year	No
SOx	0	20,000 lb/year	No
PM10	0	20,000 lb/year	No
CO	0	20,000 lb/year	No
VOC	546	20,000 lb/year	No

As demonstrated above, the SSIPEs for all pollutants were less than 20,000 lb/year; therefore public noticing for SSIPE purposes is not required.

e. Title V significant permit modification

As shown in the Discussion of Rule 2520 below, this project does not constitute a Title V significant modification. Therefore, public noticing for Title V significant modifications is required for this project.

2. Public Notice Action

As discussed above, public noticing is not required this project.

D. Daily Emission Limits (DELs)

Daily Emissions Limitations (DELs) and other enforceable conditions are required by Section 3.15 to restrict a unit's maximum daily emissions, to a level at or below the emissions associated with the maximum design capacity. Per Sections 3.15.1 and 3.15.2, the DEL must be contained in the latest ATC and contained in or enforced by the latest PTO and enforceable, in a practicable manner, on a daily basis. DELs are also required to enforce the applicability of BACT.

Proposed Rule 2201 (DEL) Conditions:

C-311-146-23, -147-14, -150-14, -196-14, -197-14, -198-14, -236-8, and -271-1

- *Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rules 2201] Federally Enforceable Through Title V Permit*
- *Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight.*
- *Note that the lb/day VOC fugitive emission limits should be removed from these permits, as the fugitive emission rates are negligible.*

C-311-267-4

- *Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-146, -147, -150, -196, -197, -198, and -236 for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit.*
- *Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight.*
- *Remove the following limit from the permit: ~~VOC fugitive emissions from the vapor recovery system components in gas service shall not exceed 31.6 lb/day.~~*

C-311-267-5

- *Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-146, -147, -150, -196, -197, -198, -236, and -271 for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit.*

C-311-163-14, -164-14, -165-14, -166-14, -167-14, -168-14, -169-14, -170-14, -177-16

- *Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rules 2201] Federally Enforceable Through Title V Permit*

- *Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight.*

C-311-268-2

- *Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-163, -164, -165, -166, -167, -168, -169, -170, and -177 for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit.*

E. Compliance Assurance

1. Source Testing

Pursuant to District Policy APR 1705, source testing is not required to demonstrate compliance with Rule 2201.

2. Monitoring

No additional monitoring is required to demonstrate compliance with the offset, public notification and daily emission limit requirements of Rule 2201.

3. Recordkeeping

Recordkeeping is required to demonstrate compliance with the offset, public notification and daily emission limit requirements of Rule 2201. A condition addressing this requirement is included on the C-311 facility-wide permit.

4. Reporting

No reporting is required to demonstrate compliance with Rule 2201.

F. Ambient Air Quality Analysis (AAQA)

An AAQA shall be conducted for the purpose of determining whether a new or modified Stationary Source will cause or make worse a violation of an air quality standard. The District will perform an AAQA for this project.

There are not an Ambient Air Quality standard for VOCs and therefore an AAQA is not required.

G. Compliance Certification

Compliance certification is required for any project which constitutes a New Major Source or a Federal Major Modification.

Section 4.15.2 of this Rule requires the owner of a new Major Source or a source undergoing a Federal Major Modification to demonstrate to the satisfaction of the District that all other Major Sources owned by such person and operating in California are in compliance or are on a schedule for compliance with all applicable emission limitations and standards. As discussed in Section VIII above, this project does not constitute a Federal Major Modification, therefore this requirement is not applicable. The Statewide Compliance statement is included in **Attachment VII**.

H. Alternate Siting Analysis

The current project occurs at an existing facility. The applicant proposes to install tanks and vessels at existing sites in the CUSA's heavy oil western stationary source.

Since the project addresses tanks to be used at the same location, the existing site will result in the least possible impact from the project. Alternative sites would involve the relocation and/or construction of various support structures on a much greater scale, and would therefore result in a much greater impact.

Rule 2410 Prevention of Significant Deterioration

The prevention of significant deterioration (PSD) program is a construction permitting program for new major stationary sources and major modifications to existing major stationary sources located in areas classified as attainment or in areas that are unclassifiable for any criteria air pollutant.

As demonstrated above, this project is not subject to the requirements of Rule 2410 because the project has a total potential to emit from all new and modified emission units below the PSD significant emission increase thresholds, and no further discussion is required.

Rule 2520 Federally Mandated Operating Permits

This facility is subject to this Rule, and has received their Title V Operating Permit. Section 3.29 defines a significant permit modification as a "permit amendment that does not qualify as a minor permit modification or administrative amendment."

The project is Title V Minor Modification. As discussed above, the facility has not applied for a Certificate of Conformity (COC). Therefore, the facility must apply to

modify their Title V permit with an minor modification, prior to operating with the proposed modifications. The Title V Compliance Certification form is included in **Attachment VII**. Continued compliance with this rule is expected.

Rule 4001 New Source Performance Standards (NSPS)

This rule incorporates the New Source Performance Standards from 40 CFR Part 60. 40 CFR Part 60, Subparts, K, Ka, Kb, and OOOO could potentially apply to the tanks included in this project.

40 CFR Part 60, Subpart K is applicable to storage vessels whose construction, reconstruction, or modification commenced after June 11, 1973 and prior to May 19, 1978. As CUSA is proposing the modification of storage vessels/tanks post 1978, this subpart is not applicable.

40 CFR Part 60, Subpart Ka is applicable to storage vessels whose construction, reconstruction, or modification commenced after May 18, 1978, and prior to July 23, 1984. As CUSA is proposing the modification of storage vessels/tanks post 1984, this subpart is not applicable.

40 CFR Part 60, Subpart Kb is applicable to storage vessels whose construction, reconstruction, or modification commenced after July 23, 1984. As CUSA is proposing the modification of a storage vessel post 1984, this subpart could be applicable. However, as the proposed storage vessels will store liquid with a tvp less than 3.5 kilopascals (kPa), or 0.5 psia, the units are exempt from the requirements of 40 CFR Part 60, Subpart Kb pursuant to Section 60.11b (b).

40 CFR Part 60, Subpart OOOO is applicable to storage vessels located in the oil and natural gas production segment which have commenced construction, modification, or reconstruction after August 23, 2011 and have emissions equal to or greater than 6 tpy. As CUSA is proposing the modification of this storage vessel post 2011, this subpart could be applicable. However, as the units' emissions are expected to be less than 6 tpy, the requirements of 40 CFR Part 60, Subpart OOOO are not applicable pursuant to Section 60.5395.

Rule 4101 Visible Emissions

Rule 4101 states that no air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. As long as the equipment is properly maintained and operated, compliance with visible emissions limits is expected under normal operating conditions.

Rule 4102 Nuisance

Rule 4102 prohibits discharge of air contaminants that could cause injury, detriment, nuisance or annoyance to the public. Public nuisance conditions are not expected as a

result of these operations provided the equipment is well maintained. Therefore, compliance with this rule is expected.

California Health & Safety Code 41700 (Health Risk Assessment)

An HRA is not required for a project with a total facility prioritization score of less than one. According to the Technical Services Memo for this project (**Attachment VIII**), the total facility prioritization score including this project was greater than one. Therefore, an HRA was required to determine the short-term acute and long-term chronic exposure from this project.

The cancer risk for this project is shown below:

HRA Summary		
Unit	**Cancer Risk**	**T-BACT Required**
C-311-146-23, -147-14, -150-14, -163-14 thru '-170-14, '-177-16, '-196-14 thru '-198-14, -236-8, '-267-4, '-267-5, '-268-2, '-271-1	2.01 E-10 per million	No

Discussion of T-BACT

BACT for toxic emission control (T-BACT) is required if the cancer risk exceeds one in one million. As demonstrated above, T-BACT is not required for this project because the HRA indicates that the risk is not above the District's thresholds for triggering T-BACT requirements.

Rule 4401 - Steam Enhanced Crude Oil Production Wells

The purpose of this rule is to limit the VOC emissions from steam-enhanced crude oil production well vents. This rule is applicable to all steam-enhanced crude oil production wells and any associated vapor collection and control systems.

If wells producing to the subject tanks operate with closed casing vents, the front line tanks receiving the production must be equipped with 99% vapor control as required by the following permit condition (ATCs for tanks C-311-150, '-163, '-164, '-177, and '-236):

Tank shall be connected to vapor control when receiving production from TEOR wells operated with closed casing vents. [District Rule 2201] N

Therefore, the requirement to have 99% control as required by Section 5.1 of the rule will be met. Continued compliance is expected.

Rule 4623 - Storage of Organic Liquids

The purpose of this rule is to limit volatile organic compound (VOC) emissions from the storage of organic liquids. This rule applies to any tank with a capacity of 1,100 gallons or greater in which any organic liquid is placed, held, or stored.

This project authorizes removal of the VCS from several crude oil production tanks for up to 600 hr/yr for maintenance and repair. However, prior to removal of the VCS, the stored oil must have a tvp less than 0.5 psia as stated in the following condition:

C-311-146, -147, -150, -196, -197, -236, -271, -163, -164, -165, -166, -167, -168, -169, -170, and -177

- *When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [Rule 4623]*

Therefore the tanks will comply with the rule and continued compliance is expected.

California Health & Safety Code 42301.6 (School Notice)

The District has verified that this site is not located within 1,000 feet of a school. Therefore, pursuant to California Health and Safety Code 42301.6, a school notice is not required.

California Environmental Quality Act (CEQA)

CEQA requires each public agency to adopt objectives, criteria, and specific procedures consistent with CEQA Statutes and the CEQA Guidelines for administering its responsibilities under CEQA, including the orderly evaluation of projects and preparation of environmental documents. The District adopted its *Environmental Review Guidelines* (ERG) in 2001. The basic purposes of CEQA are to:

- Inform governmental decision-makers and the public about the potential, significant environmental effects of proposed activities;
- Identify the ways that environmental damage can be avoided or significantly reduced;
- Prevent significant, avoidable damage to the environment by requiring changes in projects through the use of alternatives or mitigation measures when the governmental agency finds the changes to be feasible; and
- Disclose to the public the reasons why a governmental agency approved the project in the manner the agency chose if significant environmental effects are involved.

Greenhouse Gas (GHG) Significance Determination

It is determined that no other agency has prepared or will prepare an environmental review document for the project. Thus the District is the Lead Agency for this project.

On December 17, 2009, the District's Governing Board adopted a policy, APR 2005, *Addressing GHG Emission Impacts for Stationary Source Projects Under CEQA When Serving as the Lead Agency,* for addressing GHG emission impacts when the District is Lead Agency under CEQA and approved the District's guidance document for use by other agencies when addressing GHG impacts as lead agencies under CEQA. Under this policy, the District's determination of significance of project-specific GHG emissions is founded on the principal that projects with GHG emission reductions consistent with AB 32 emission reduction targets are considered to have a less than significant impact on global climate change. Consistent with District Policy 2005, projects complying with an approved GHG emission reduction plan or GHG mitigation program, which avoids or substantially reduces GHG emissions within the geographic area in which the project is located, would be determined to have a less than significant individual and cumulative impact for GHG emission.

The California Air Resources Board (ARB) adopted a Cap-and-Trade regulation as part one of the strategies identified for AB 32. This Cap-and-Trade regulation is a statewide plan, supported by a CEQA compliant environmental review document, aimed at reducing or mitigating GHG emissions from targeted industries. Facilities subject to the Cap-and-Trade regulation are subject to an industry-wide cap on overall GHG emissions. Any growth in emissions must be accounted for under that cap such that a corresponding and equivalent reduction in emissions must occur to allow any increase. Further, the cap decreases over time, resulting in an overall decrease in GHG emissions.

Under District policy APR 2025, *CEQA Determinations of Significance for Projects Subject to ARB's GHG Cap-and-Trade Regulation*, the District finds that the Cap-and-Trade is a regulation plan approved by ARB, consistent with AB32 emission reduction targets, and supported by a CEQA compliant environmental review document. As such, consistent with District Policy 2005, projects complying project complying with Cap-and-Trade requirements are determined to have a less than significant individual and cumulative impact for GHG emissions.

Industries covered by Cap-and-Trade are identified in the regulation under section 95811, Covered Entities:

1. Group 1: Large industrial facilities

   These types of facilities are subject to Cap and Trade, and the specific companies covered are listed at http://www.arb.ca.gov/cc/capandtrade/capandtrade.htm, Section 95811

(a), under the "Publically Available Market Information" section (list maintained by the California Air Resources Board).

2. Group 2: Electricity generation facilities located in California, or electricity importers

   These types of facilities are subject to Cap and Trade (section 95811, b).

3. Group 3: Suppliers of Natural Gas, Suppliers of Reformulated Gasoline Blendstock for Oxygenate Blending and Distillate Fuel Oil, Suppliers of Liquefied Petroleum Gas, and Suppliers of Blended Fuels

   These entities are subject to Cap and Trade compliance obligations which must cover all fuels (except jet fuels) identified in section 95811 (c) through (f) of the Cap-and-Trade regulation delivered to end users in California, less the fuel delivered to covered entities (group 1 above).

This facility is subject to the Cap-and-Trade regulation. Therefore, as discussed above, consistent with District Policies APR 2005 and APR 2025, the District concludes that the GHG emissions increases associated with this project would have a less than significant individual and cumulative impact on global climate change.

District CEQA Findings

The District is the Lead Agency for this project because there is no other agency with broader statutory authority over this project. The District performed an Engineering Evaluation (this document) for the proposed project and determined that the activity will occur at an existing facility and the project involves negligible expansion of the existing use. Furthermore, the District determined that the activity will not have a significant effect on the environment. The District finds that the activity is categorically exempt from the provisions of CEQA pursuant to CEQA Guideline § 15301 (Existing Facilities), and finds that the project is exempt per the general rule that CEQA applies only to projects which have the potential for causing a significant effect on the environment (CEQA Guidelines §15061(b)(3)).

Indemnification Agreement/Letter of Credit Determination

According to District Policy APR 2010 (CEQA Implementation Policy), when the District is the Lead or Responsible Agency for CEQA purposes, an indemnification agreement and/or a letter of credit may be required. The decision to require an indemnity agreement and/or a letter of credit is based on a case-by-case analysis of a particular project's potential for litigation risk, which in turn may be based on a project's potential to generate public concern, its potential for significant impacts, and the project proponent's ability to pay for the costs of litigation without a letter of credit, among other factors.

The criteria pollutant emissions and toxic air contaminant emissions associated with the proposed project are not significant, and there is minimal potential for public concern for this particular type of facility/operation. Therefore, an Indemnification Agreement and/or a Letter of Credit will not be required for this project in the absence of expressed public concern.

IX. Recommendation

Compliance with all applicable rules and regulations is expected. Issue ATCs C-311-146-23, -147-14, -150-14, -163-14 thru '-170-14, '-177-16, '-196-14 thru '-198-14, -236-8, '-267-4, '-267-5, '-268-2, '-271-1 as requested. Draft ATCs are included in **Attachment IX**.

X. Billing Information

Annual Permit Fees			
Permit Number	Fee Schedule	Fee Description	Annual Fee
C-311-146	3020-5-D	84,546 gallons	$ 194.00
C-311-147	3020-5-D	84,546 gallons	$ 194.00
C-311-150	3020-5-E	214,326 gallons	$ 258.00
C-311-196	3020-5-E	210,000 gallons	$ 258.00
C-311-197	3020-5-E	210,000 gallons	$ 258.00
C-311-198	3020-5-B	11,340 gallons	$ 98.00
C-311-236	3020-5-E	214,200 gallons	$ 258.00
C-311-271	3020-5-E	147,000 gallons	$ 258.00
C-311-267	3020-1-D	100 horsepower	$ 330.00
C-311-163	3020-5-E	197,274 gallons	$ 258.00
C-311-164	3020-5-E	197,274 gallons	$ 258.00
C-311-165	3020-5-E	234,864 gallons	$ 258.00
C-311-166	3020-5-E	234,864 gallons	$ 258.00
C-311-167	3020-5-E	150,318 gallons	$ 258.00
C-311-168	3020-5-E	150,318 gallons	$ 258.00
C-311-169	3020-5-D	59,808 gallons	$ 194.00
C-311-170	3020-5-D	79,842 gallons	$ 194.00
C-311-177	3020-5-E	211,974 gallons	$ 258.00
C-311-268	3020-1-C	50 horsepower	$ 207.00

Attachments

I. Current PTOs and ATCs
II. Process Flow Diagrams
III. Tank Emissions Calculations
IV. Gas Analyses
V. Emissions Profiles
VI. BACT Analysis
VII. Statewide Compliance Statement and Title V Compliance Certification Form
VIII.HRA
IX. Draft ATCs

Attachment I
Current PTOs and ATCs

AUTHORITY TO CONSTRUCT

PERMIT NO: C-311-267-3 **ISSUANCE DATE:** 09/29/2015

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13 **TOWNSHIP:** 120S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-112, '-146, '-147, '-150, '-196, '-197, '-198, AND '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: CONNECT CRUDE OIL TANK C-311-271 TO VAPOR CONTROL SYSTEM, REDUCE VOC CONTENT LIMIT OF VAPORS FROM 60% TO 50% BY WT

CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. This Authority to Construct (ATC) shall be implemented concurrently with ATC C-311-271-0. [District Rule 2201]
3. Vapor recovery system shall consist of a closed vent system that collects VOCs from District approved storage tanks and discharges to District approved VOC vapor recovery. The vapor recovery system shall be APCO-approved. The VOC vapor recovery system shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, vapor balance well vent/tank vapor recovery system, DOGGR-approved injection well(s) for disposal of vapors, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method(s) specified in this permit. [District Rule 4623, 5.1.1 and 5.6] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

Arnaud Marjollet, Director of Permit Services
C-311-267-3 Oct 3 2016 2:04PM -- EDGEHILR Joint Inspection NOT Required

4. Vapor recovery system compressor shall activate before the pressure relief valve vents, on any of the units served by the vapor recovery equipment. The vapor recovery system does not serve tanks while they are disconnected during District authorized cleaning and maintenance events as allowed by those permits. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
5. The vapor recovery system may control the recovered well casing vapors from permit units C-311-77, '-78, '-83, '-111, and '-112 during operation of the casing collection system as a casing balance system. [District District Rule 2201and 4623] Federally Enforceable Through Title V Permit
6. The 13D system may be operated as a vapor balance well vent/tank vapor recovery system. When operated as a vapor balance system, valves associated with the 13D system may be closed to allow condensate and noncondensable gas to be displaced to the reservoir through wells served by the system. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Operation of the casing collection system as a casing balance system shall not cause gas flow rates at the 6C, 13D and/or 25D Oil Cleaning Plant in excess of the design capacity of the tank vapor recovery compressor. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Maximum VOC content of vapor in the vapor recovery system shall not exceed 50% by weight. [District Rule 2201]
9. VOC fugitive emissions from the vapor recovery system components in gas service shall not exceed 31.6 lb/day. [District Rule 2201]
10. Fugitive VOC emissions shall be calculated using EPA's "Protocol for Equipment Leak Emission Estimate," Table 2-4, Oil and Gas Production Operations Average Emission Factors. [District Rule 2201] Federally Enforceable Through Title V Permit
11. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 50% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201]
12. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, ASTM D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rule 1081] Federally Enforceable Through Title V Permit
13. Except as otherwise provided on this permit, vapor recovery system shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
14. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
15. All piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
16. Facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
17. Operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

18. Emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

19. Any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

20. If the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

21. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit

22. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

23. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

24. Operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

AUTHORITY TO CONSTRUCT

PERMIT NO: C-311-271-0 **ISSUANCE DATE:** 09/29/2015

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

EQUIPMENT DESCRIPTION:
3,500 BBL FIXED ROOF CRUDE OIL STORAGE TANK (OR DISTRICT APPROVED EQUIVALENT), #13-13A SERVED BY SHARED VAPOR RECOVERY SYSTEM LISTED ON PERMIT UNIT C-311-267

CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. This Authority to Construct (ATC) cancels and supersedes ATCs C-311-264-0 and -264-2. [District Rule 2201]
3. This ATC shall be implemented concurrently with ATC C-311-267-3. [District Rule 2201]
4. The permittee shall obtain written District approval for the use of any equivalent equipment not specifically approved by this Authority to Construct. Approval of the equivalent equipment shall be made only after the District's determination that the submitted design and performance of the proposed alternate equipment is equivalent to the specifically authorized equipment. [District Rule 2201]
5. The permittee's request for approval of equivalent equipment shall include the make, model, manufacturer's maximum rating, manufacturer's guaranteed emission rates, equipment drawing(s), and operational characteristics/parameters. [District Rule 2010]
6. Alternate equipment shall be of the same class and category of source as the equipment authorized by the Authority to Construct. [District Rule 2201]
7. No emission factor and no emission shall be greater for the alternate equipment than for the proposed equipment. No changes in the hours of operation, operating rate, throughput, or firing rate may be authorized for any alternate equipment. [District Rule 2201]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

Arnaud Marjollet, Director of Permit Services
C-311-271-0 Oct 3 2016 2:04PM -- EDGEHILR Joint Inspection NOT Required

8. Tank shall only vent to vapor recovery system listed on permit unit C-311-267. [District Rules 2520, 9.3.2 and 4623, 5.1.1 and 5.6]
9. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6]
10. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17]
11. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2]
12. VOC content of vapor in the tank vapor space shall not exceed 50% by weight. [District Rule 2201]
13. VOC fugitive emissions from the components in gas service for the storage tank shall not exceed 2.0 lb/day. [District Rule 2201]
14. Fugitive VOC emissions shall be calculated using EPA's "Protocol for Equipment Leak Emission Estimate," Table 2-4, Oil and Gas Production Operations Average Emission Factors. [District Rule 2201]
15. Operator shall test VOC content of the vapors representative of 13D tank vapor recovery gas annually. [District Rule 2201]
16. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rule 2201]
17. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7]
18. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623]
19. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2]
20. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3]
21. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4]

CONDITIONS CONTINUE ON NEXT PAGE

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3]

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3]

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3]

25. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3]

26. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3]

27. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3]

28. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3]

29. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080]

30. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080]

31. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080]

CONDITIONS CONTINUE ON NEXT PAGE

32. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080]

33. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080]

34. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080]

35. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

36. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

37. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201]

38. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1]

39. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623]

40. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080]

41. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rules 2520, 9.4.2 and 4623, 6.3]

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-146-22 **EXPIRATION DATE:** 12/31/2016

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-23 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. Maximum VOC content of vapor in tank vapor space shall not exceed 60% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit
6. VOC fugitive emissions from the components in gas service for the storage tank shall not exceed 9.8 lb/day. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Fugitive VOC emissions shall be calculated using EPA's "Protocol for Equipment Leak Emission Estimate," Table 2-4, Oil and Gas Production Operations Average Emission Factors. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 60% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit
9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

10. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

11. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

12. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

13. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

14. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
22. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

39. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

45. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

46. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

47. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

48. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

49. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

50. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

52. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-147-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-22 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-150-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14

EQUIPMENT DESCRIPTION:
5,103 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-18 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623]

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-163-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-31 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rules 2520, 9.3.2 and 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rules 2520, 9.3.2 and 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-164-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-32 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-165-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-166-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-167-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-33 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-168-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-34 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-169-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
1,424 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-60 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-170-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
1,901 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-37 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-177-16 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
5,047 BBL FIXED ROOF FREE WATER KNOCK OUT TANK # 25-42 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-196-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 13D **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
5,000 BBL FIXED ROOF WASH TANK # 13-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-197-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 13D **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
5,000 BBL FIXED ROOF WASH TANK # 13-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-198-13 **EXPIRATION DATE:** 12/31/2016

SECTION: 13D **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
270 BBL FIXED ROOF CRUDE OIL TANK # 13-13 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
6. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
7. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
8. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

10. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

11. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

12. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

13. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

14. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

18. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

28. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

40. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

41. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

42. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

46. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-236-7 **EXPIRATION DATE:** 12/31/2016

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
5,100 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-19 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267

PERMIT UNIT REQUIREMENTS

1. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
2. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. Maximum VOC content of vapor in tank vapor space shall not exceed 60% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit
6. VOC fugitive emissions from the components in gas service for the storage tank shall not exceed 14.7 lb/day. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Fugitive VOC emissions shall be calculated using EPA's "Protocol for Equipment Leak Emission Estimate," Table 2-4, Oil and Gas Production Operations Average Emission Factors. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Operator shall test VOC content of the vapors representative of 13D tank vapor recovery gas annually. [District Rule 2201] Federally Enforceable Through Title V Permit
9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit
10. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

11. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

12. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

13. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

14. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

42. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

45. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

46. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

47. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

48. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

49. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

50. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

52. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-267-2 **EXPIRATION DATE:** 12/31/2016

SECTION: 13 **TOWNSHIP:** 120S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-112, '-146, '-147, '-150, '-196, '-197, '-198, AND '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS

PERMIT UNIT REQUIREMENTS

1. Vapor recovery system shall consist of a closed vent system that collects VOCs from District approved storage tanks and discharges to District approved VOC vapor recovery. The vapor recovery system shall be APCO-approved. The VOC vapor recovery system shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, vapor balance well vent/tank vapor recovery system, DOGGR-approved injection well(s) for disposal of vapors, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method(s) specified in this permit. [District Rule 4623, 5.1.1 and 5.6] Federally Enforceable Through Title V Permit
2. Vapor recovery system compressor shall activate before the pressure relief valve vents, on any of the units served by the vapor recovery equipment. The vapor recovery system does not serve tanks while they are disconnected during District authorized cleaning and maintenance events as allowed by those permits. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
3. The vapor recovery system may control the recovered well casing vapors from permit units C-311-77, '-78, '-83, '-111, and '-112 during operation of the casing collection system as a casing balance system. [District District Rule 2201and 4623] Federally Enforceable Through Title V Permit
4. The 13D system may be operated as a vapor balance well vent/tank vapor recovery system. When operated as a vapor balance system, valves associated with the 13D system may be closed to allow condensate and noncondensable gas to be displaced to the reservoir through wells served by the system. [District Rule 2201] Federally Enforceable Through Title V Permit
5. Operation of the casing collection system as a casing balance system shall not cause gas flow rates at the 6C, 13D and/or 25D Oil Cleaning Plant in excess of the design capacity of the tank vapor recovery compressor. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Maximum VOC content of vapor in the vapor recovery system shall not exceed 60% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit
7. VOC fugitive emissions from the vapor recovery system components in gas service shall not exceed 37.6 lb/day. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Fugitive VOC emissions shall be calculated using EPA's "Protocol for Equipment Leak Emission Estimate," Table 2-4, Oil and Gas Production Operations Average Emission Factors. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 60% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

10. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, ASTM D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rule 1081] Federally Enforceable Through Title V Permit

11. Except as otherwise provided on this permit, vapor recovery system shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

12. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

13. All piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

14. Facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

15. Operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

16. Emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

17. Any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

18. If the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

19. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit
20. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
21. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit
22. Operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-267-2 **EXPIRATION DATE:** 12/31/2016

SECTION: 13 **TOWNSHIP:** 120S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-112, '-146, '-147, '-150, '-196, '-197, '-198, AND '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS

PERMIT UNIT REQUIREMENTS

1. Vapor recovery system shall consist of a closed vent system that collects VOCs from District approved storage tanks and discharges to District approved VOC vapor recovery. The vapor recovery system shall be APCO-approved. The VOC vapor recovery system shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, vapor balance well vent/tank vapor recovery system, DOGGR-approved injection well(s) for disposal of vapors, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method(s) specified in this permit. [District Rule 4623, 5.1.1 and 5.6] Federally Enforceable Through Title V Permit
2. Vapor recovery system compressor shall activate before the pressure relief valve vents, on any of the units served by the vapor recovery equipment. The vapor recovery system does not serve tanks while they are disconnected during District authorized cleaning and maintenance events as allowed by those permits. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
3. The vapor recovery system may control the recovered well casing vapors from permit units C-311-77, '-78, '-83, '-111, and '-112 during operation of the casing collection system as a casing balance system. [District District Rule 2201and 4623] Federally Enforceable Through Title V Permit
4. The 13D system may be operated as a vapor balance well vent/tank vapor recovery system. When operated as a vapor balance system, valves associated with the 13D system may be closed to allow condensate and noncondensable gas to be displaced to the reservoir through wells served by the system. [District Rule 2201] Federally Enforceable Through Title V Permit
5. Operation of the casing collection system as a casing balance system shall not cause gas flow rates at the 6C, 13D and/or 25D Oil Cleaning Plant in excess of the design capacity of the tank vapor recovery compressor. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Maximum VOC content of vapor in the vapor recovery system shall not exceed 60% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit
7. VOC fugitive emissions from the vapor recovery system components in gas service shall not exceed 37.6 lb/day. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Fugitive VOC emissions shall be calculated using EPA's "Protocol for Equipment Leak Emission Estimate," Table 2-4, Oil and Gas Production Operations Average Emission Factors. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

9. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 60% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

10. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, ASTM D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rule 1081] Federally Enforceable Through Title V Permit

11. Except as otherwise provided on this permit, vapor recovery system shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

12. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

13. All piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

14. Facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

15. Operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

16. Emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

17. Any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

18. If the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

19. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit

20. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

21. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

22. Operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: C-311-268-1 **EXPIRATION DATE:** 12/31/2016

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
25D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-163, '-164, '-165, '-166, '-167, '-168, '-169, '-170 AND '-177, INCLUDING 50 HP COMPRESSOR, TWO VERTICAL SCRUBBERS, FIN FAN COOLER, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS

PERMIT UNIT REQUIREMENTS

1. Vapor recovery system shall consist of a closed vent system that collects VOCs from District approved storage tanks and discharges to District approved VOC vapor recovery. The vapor recovery system shall be APCO-approved. The VOC vapor recovery system shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, vapor balance well vent/tank vapor recovery system, DOGGR-approved injection well(s) for disposal of vapors, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method(s) specified in this permit. [District Rule 4623, 5.1.1 and 5.6] Federally Enforceable Through Title V Permit
2. Vapor recovery system compressor shall activate before the pressure relief valve vents, on any of the units served by the vapor recovery equipment. The vapor recovery system does not serve tanks while they are disconnected during District authorized cleaning and maintenance events as allowed by those permits. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
3. The vapor recovery system may control the recovered well casing vapors from permit unit C-311-79 during operation of the casing collection system as a casing balance system. [District Rule 2201 and 4623] Federally Enforceable Through Title V Permit
4. The 25D system may be operated as a vapor balance well vent/tank vapor recovery system. When operated as a vapor balance system valves associated with the 25D system may be closed to allow condensate and noncondensable gas to be displaced to the reservoir through wells served by the system. [District Rule 2201] Federally Enforceable Through Title V Permit
5. Operation of the system as a balance system shall not cause gas flow rates at the 6C, 13D and/or 25D Oil Cleaning Plant in excess of the design capacity of the tank vapor recovery compressor. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Operator shall test VOC content of the vapors representative of 25D tank vapor recovery gas annually. [District Rule 2201] Federally Enforceable Through Title V Permit
8. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit
9. Except as otherwise provided on this permit, vapor recovery system shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

10. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

11. All piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

12. Facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

13. Operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

14. Emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

15. Any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

16. If the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

17. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit


18. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE


19. Operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

Attachment II
Process Flow Diagrams


13 D OCP – Balancing Operation

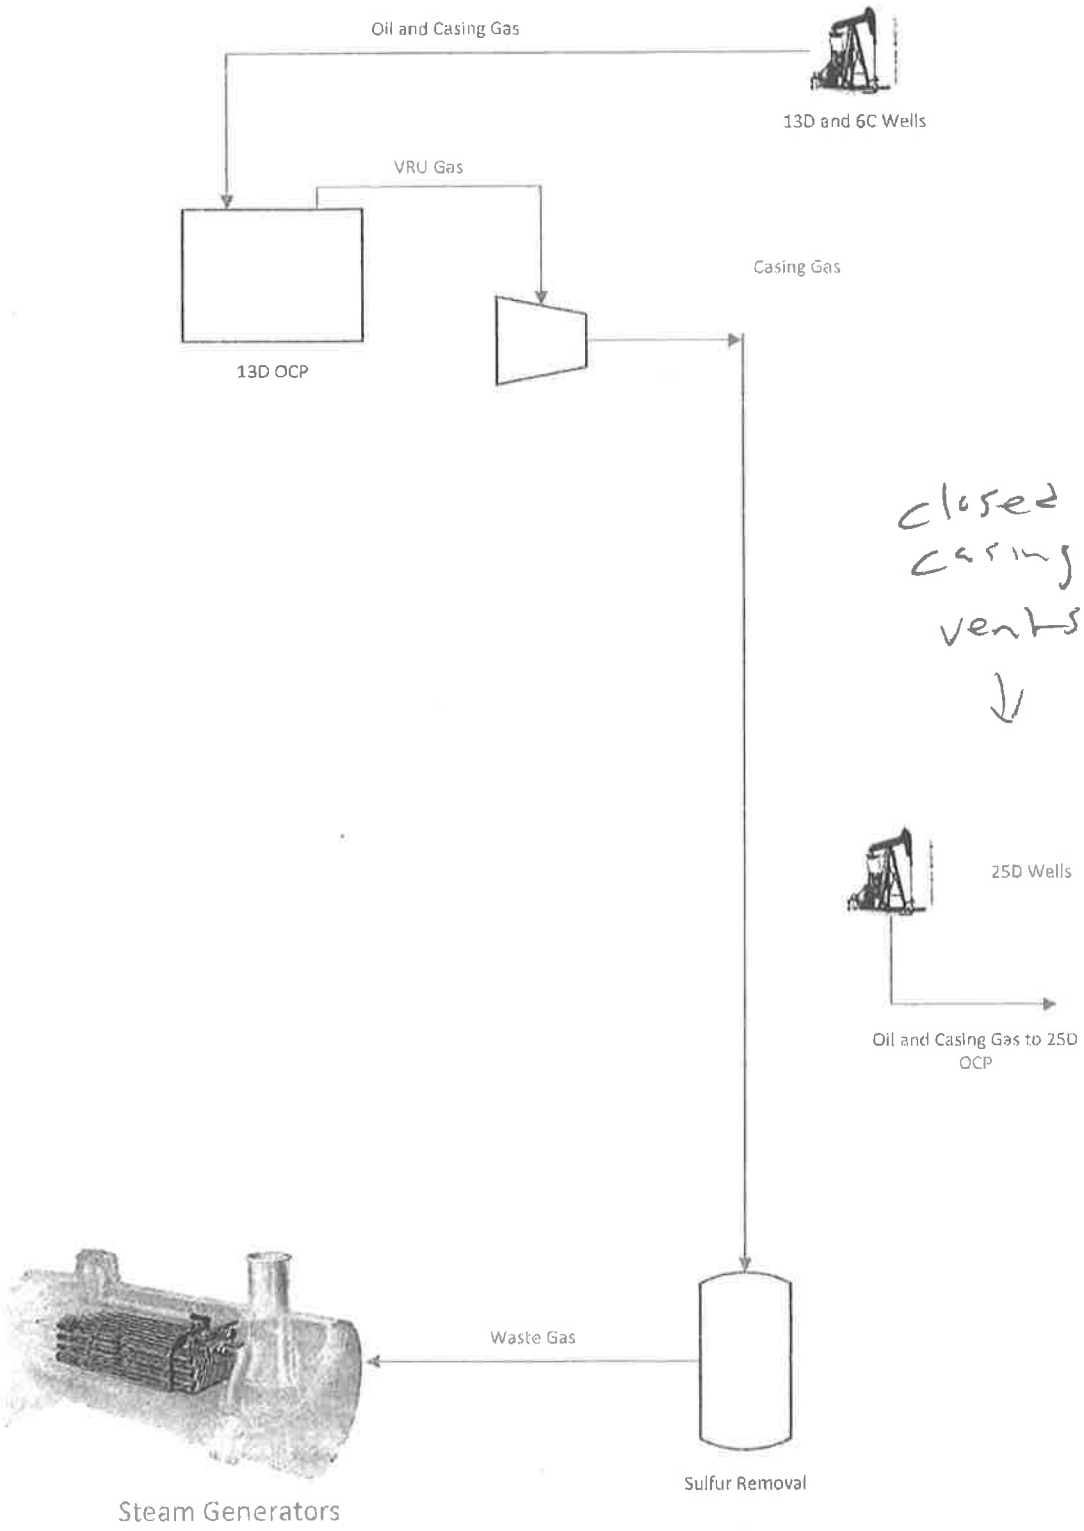


13 D OCP – Normal Operation

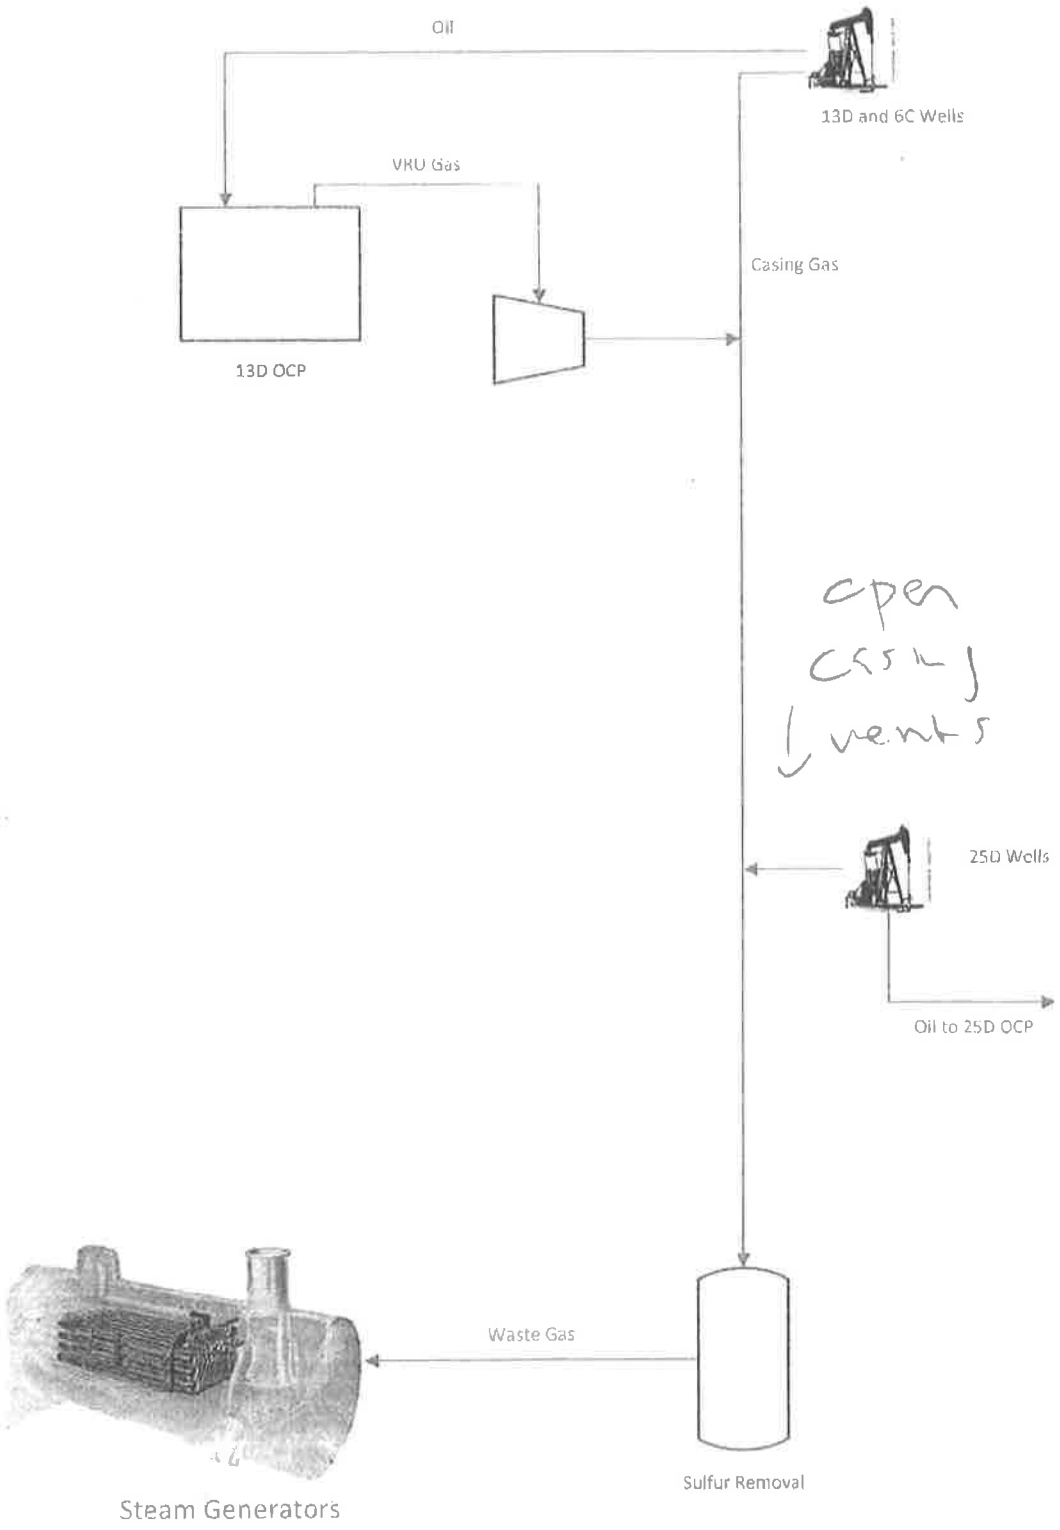

25 D OCP – Balancing Operation

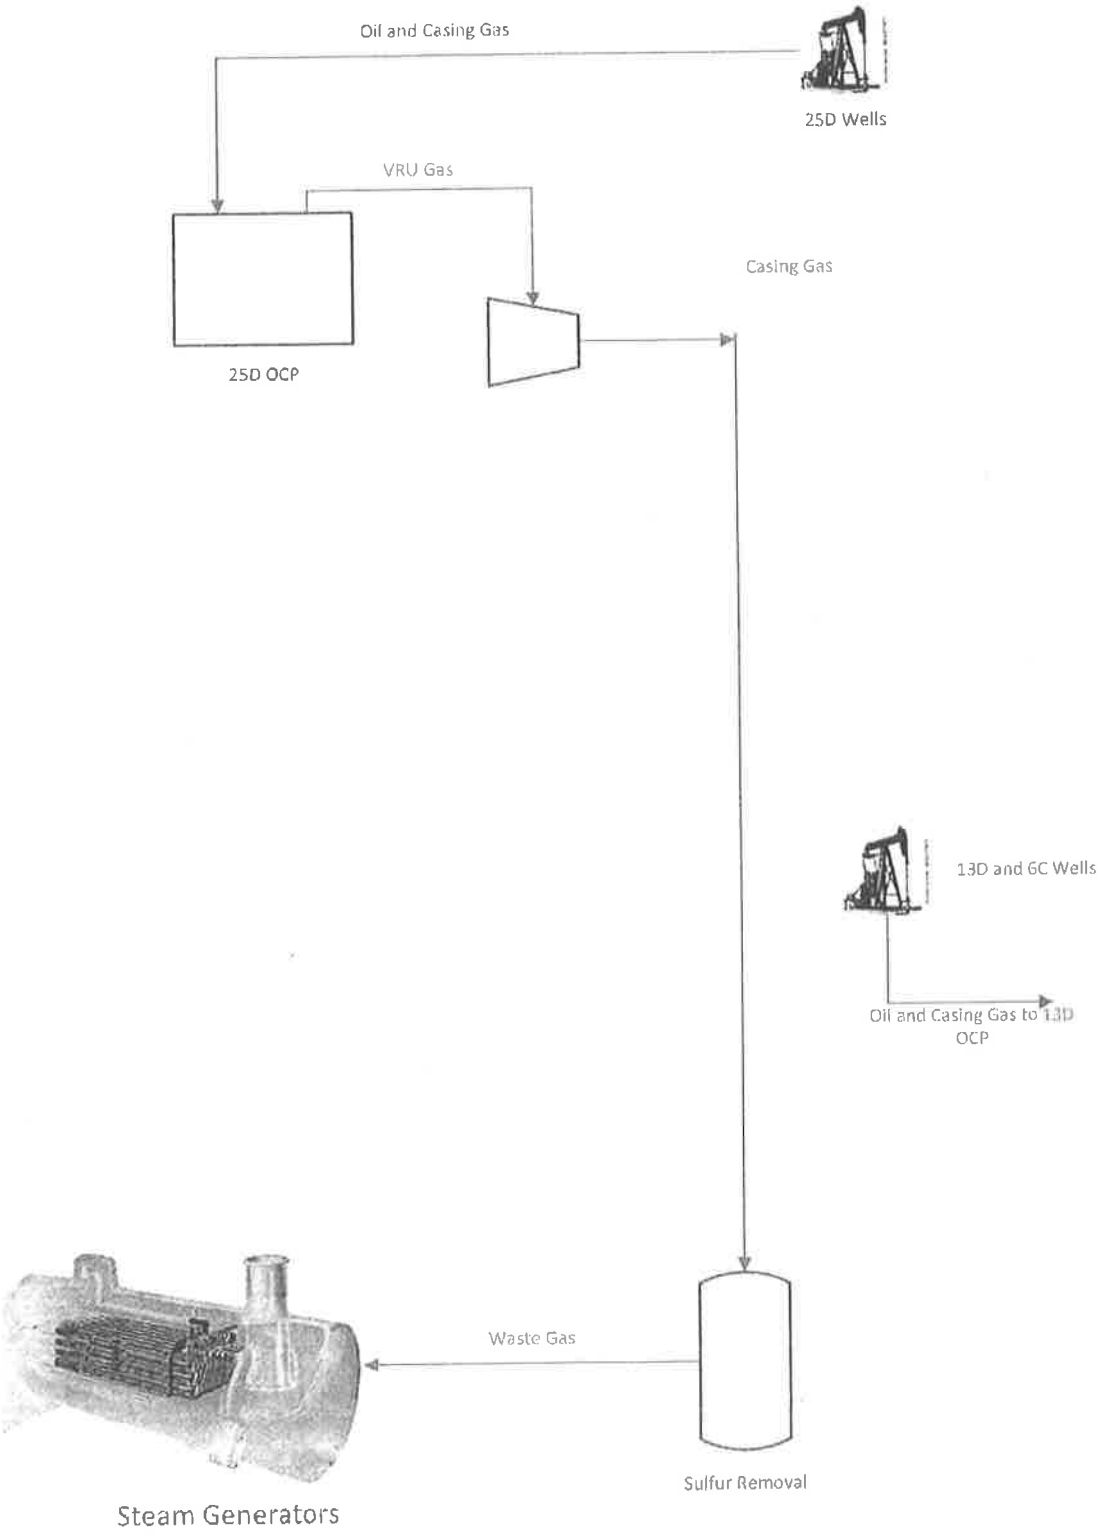

25 D OCP – Normal Operation

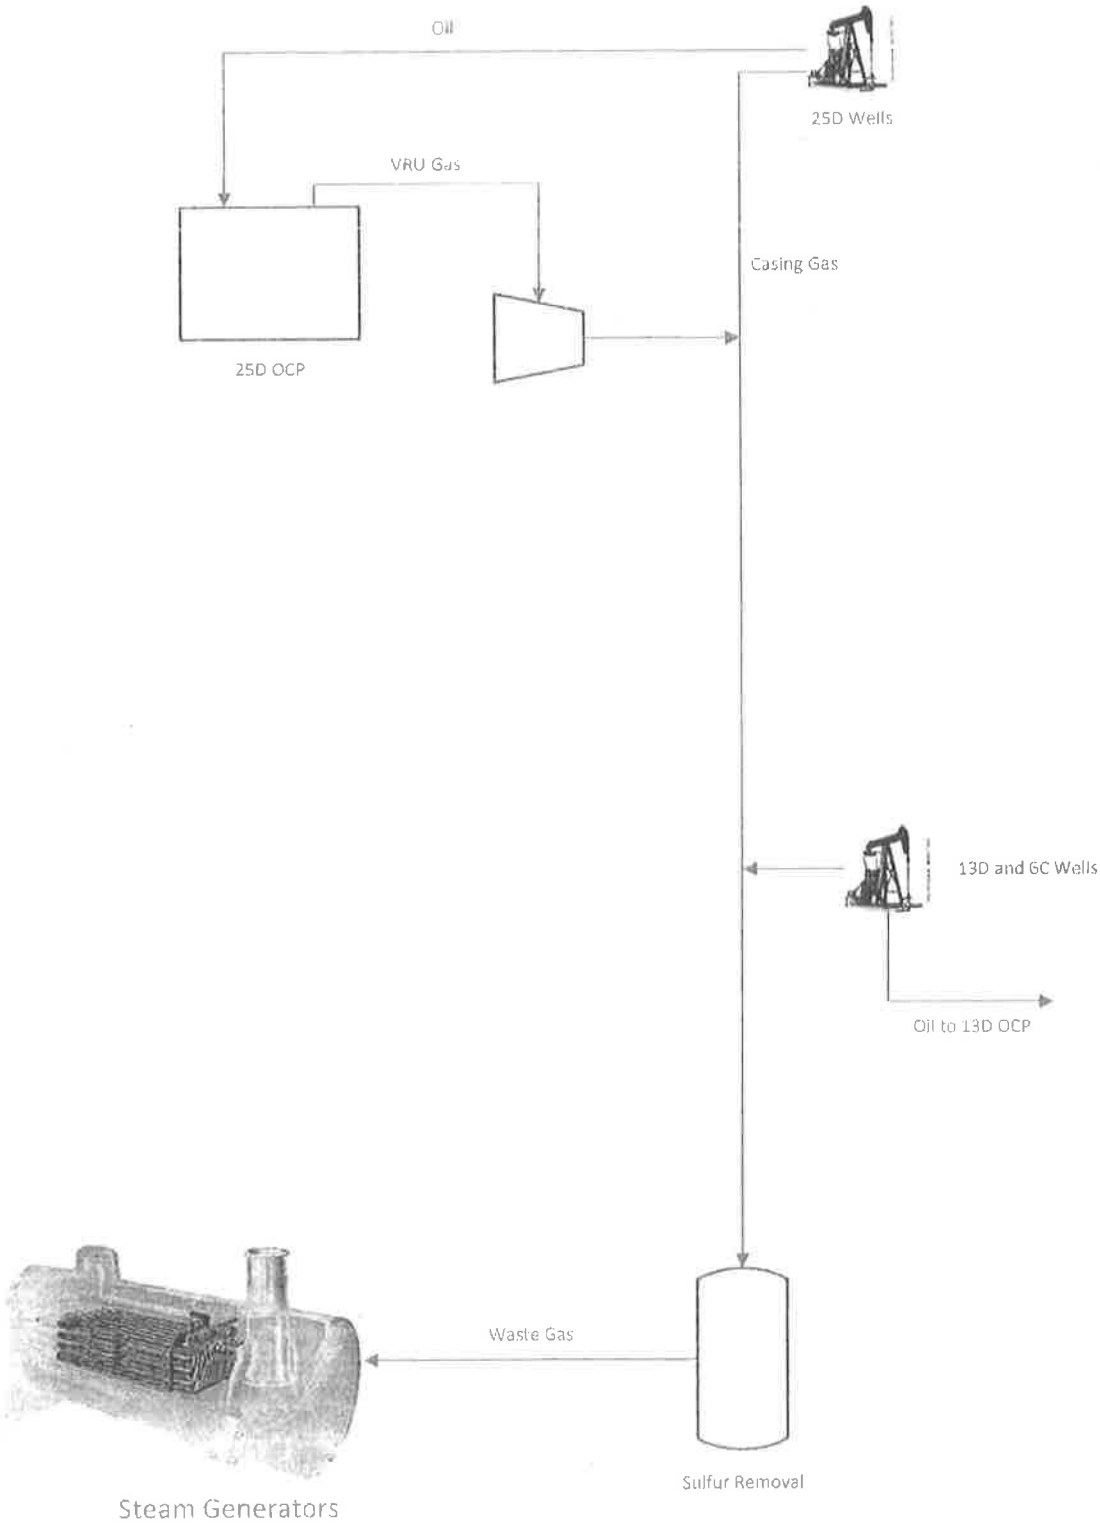

Attachment III
Tank Emissions Calculations

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-146
facility tank I.D.	13-23
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	30
capacity of tank (bbl)	2,000
conical or dome roof? (c, d)	c
shell height of tank (feet)	16
average liquid height (feet)	14
are the roof and shell the same color? (yes,no)	yes
For roof: color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
----This row only used if shell is different color from roof----	
----This row only used if shell is different color from roof----	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
----This row only used if flashing losses occur in this tank----		
----This row only used if flashing losses occur in this tank----		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.3125
vapor space volume, Vv (cubic feet)		1634.61
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	121	0.33
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	121	0.3

Summary Table	
Permit Number	**C-311-146**
Facility Tank I.D.	**13-23**
Tank capacity (bbl)	**2,000**
Tank diameter (ft)	**30**
Tank shell height (ft)	**16**
Conical or Dome Roof	**Conical**
Maximum Daily Fluid Throughput (bbl/day)	**-**
Maximum Annual Fluid Throughput (bbl/year)	**-**
Maximum Daily Oil Throughput (bbl/day)	**N/A**
Maximum Annual Oil Throughput (bbl/year)	**N\A**
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	**0.3**
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	**121**

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-147
facility tank I.D.	13-22
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	30
capacity of tank (bbl)	2,000
conical or dome roof? (c, d)	c
shell height of tank (feet)	16
average liquid height (feet)	14
are the roof and shell the same color? (yes,no)	yes
For roof:	
color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
----This row only used if shell is different color from roof----	
----This row only used if shell is different color from roof----	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
----This row only used if flashing losses occur in this tank----		
----This row only used if flashing losses occur in this tank----		
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.3125
vapor space volume, Vv (cubic feet)		1634.61
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1266

Results	lb/year	lb/day
Standing Storage Loss	121	0.33
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	121	0.3

Summary Table	
Permit Number	C-311-147
Facility Tank I.D.	13-22
Tank capacity (bbl)	2,000
Tank diameter (ft)	30
Tank shell height (ft)	16
Conical or Dome Roof	Conical
Maximum Daily Fluid Throughput (bbl/day)	-
Maximum Annual Fluid Throughput (bbl/year)	-
Maximum Daily Oil Throughput (bbl/day)	N/A
Maximum Annual Oil Throughput (bbl/year)	N/A
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	0.3
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	121

Tank Input Data	
permit number (S-xxxx-xx-xx)	-150
facility tank I.D.	13-18
nearest city {1: Bakersfield, 2: Fresno, 3: Stockton}	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? **{yes, no}**	yes
will flashing losses occur in this tank (only if first-line tank)? **{yes, no}**	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	39
capacity of tank (bbl)	5,000
conical or dome roof? **{c, d}**	c
shell height of tank (feet)	24
average liquid height (feet)	19
are the roof and shell the same color? **{yes,no}**	yes
For roof: color {1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White}	4
condition {1: Good, 2: Poor}	1
------This row only used if shell is different color from roof------	
------This row only used if shell is different color from roof------	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		28,750
maximum annual fluid throughput (bbl)		10,493,750
------This row only used if flashing losses occur in this tank------		
------This row only used if flashing losses occur in this tank------		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4063
vapor space volume, Vv (cubic feet)		6458.26
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	478	1.31
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	**478**	**1.3**

Tank Input Data	
permit number (S-xxxx-xx-xx)	**163,164**
facility tank I.D.	**5D31, 25D32**
nearest city {1: Bakersfield, 2: Fresno, 3: Stockton}	**2**
tank ROC vapor pressure (psia)	**0.1**
liquid bulk storage temperature, Tb (°F)	**153**
is this a constant-level tank? **{yes, no}**	**yes**
will flashing losses occur in this tank (only if first-line tank)? **{yes, no}**	**no**
breather vent pressure setting range (psi)	**0.06**
diameter of tank (feet)	**40**
capacity of tank (bbl)	**5,000**
conical or dome roof? **{c, d}**	**c**
shell height of tank (feet)	**21**
average liquid height (feet)	**18**
are the roof and shell the same color? **{yes,no}**	**yes**
For roof: color {1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White}	**4**
condition {1: Good, 2: Poor}	**1**
------This row only used if shell is different color from roof------	
------This row only used if shell is different color from roof------	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		**28,750**
maximum annual fluid throughput (bbl)		10,493,750
------This row only used if flashing losses occur in this tank------		
------This row only used if flashing losses occur in this tank------		-
molecular weight, Mw (lb/lb-mol)		**100**

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4167
vapor space volume, Vv (cubic feet)		4293.51
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	318	0.87
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	**318**	**0.9**

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-165 & 166
facility tank I.D.	25D-29 & 25D-30
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	163
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent preasure setting range (psi)	0.06
diameter of tank (feet)	50
capacity of tank (bbl)	5,600
conical or dome roof? (c, d)	c
shell height of tank (feet)	16
average liquid height (feet)	14
are the roof and shell the same color? (yes,no)	yes
For roof: color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
----This row only used if shell is different color from roof----	
----This row only used if shell is different color from roof----	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
----This row only used if flashing losses occur in this tank----		
----This row only used if flashing losses occur in this tank----		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia)	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia)	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.5208
vapor space volume, Vv (cubic feet)		4949.64
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	367	1.00
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	367	1.0

Summary Table	
Permit Number	**C-311-165 & 166**
Facility Tank I.D.	**25D-29 & 25D-30**
Tank capacity (bbl)	**5,600**
Tank diameter (ft)	**50**
Tank shell height (ft)	**16**
Conical or Dome Roof	**Conical**
Maximum Daily Fluid Throughput (bbl/day)	**-**
Maximum Annual Fluid Throughput (bbl/year)	**-**
Maximum Daily Oil Throughput (bbl/day)	**N/A**
Maximum Annual Oil Throughput (bbl/year)	**N\A**
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	**1.0**
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	**367**

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-167 & -168
facility tank I.D.	25D-33 & 25D-34
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	40
capacity of tank (bbl)	3,600
conical or dome roof? (c, d)	c
shell height of tank (feet)	16
average liquid height (feet)	8
are the roof and shell the same color? (yes,no)	yes
For roof: color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
----This row only used if shell is different color from roof----	
----This row only used if shell is different color from roof----	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
----This row only used if flashing losses occur in this tank----		
----This row only used if flashing losses occur in this tank----		
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia)	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia)	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4167
vapor space volume, Vv (cubic feet)		10576.70
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	783	2.15
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	783	2.1

Summary Table	
Permit Number	**C-311-167 & -168**
Facility Tank I.D.	**25D-33 & 25D-34**
Tank capacity (bbl)	**3,600**
Tank diameter (ft)	**40**
Tank shell height (ft)	**16**
Conical or Dome Roof	**Conical**
Maximum Daily Fluid Throughput (bbl/day)	**-**
Maximum Annual Fluid Throughput (bbl/year)	**-**
Maximum Daily Oil Throughput (bbl/day)	**N/A**
Maximum Annual Oil Throughput (bbl/year)	**N/A**
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	**2.1**
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	**783**

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-169
facility tank I.D.	25D-60
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	26.5
capacity of tank (bbl)	1,424
conical or dome roof? (c, d)	c
shell height of tank (feet)	14.5
average liquid height (feet)	7
are the roof and shell the same color? (yes,no)	yes
For roof: color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
——This row only used if shell is different color from roof——	
——This row only used if shell is different color from roof——	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
——This row only used if flashing losses occur in this tank——		
——This row only used if flashing losses occur in this tank——		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.2760
vapor space volume, Vv (cubic feet)		4288.84
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	318	0.87
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	318	0.9

Summary Table	
Permit Number	C-311-169
Facility Tank I.D.	25D-60
Tank capacity (bbl)	1,424
Tank diameter (ft)	26.5
Tank shell height (ft)	14.5
Conical or Dome Roof	Conical
Maximum Daily Fluid Throughput (bbl/day)	-
Maximum Annual Fluid Throughput (bbl/year)	-
Maximum Daily Oil Throughput (bbl/day)	N/A
Maximum Annual Oil Throughput (bbl/year)	N\A
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	0.9
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	318

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-170
facility tank I.D.	25D-37
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	40
capacity of tank (bbl)	1,900
conical or dome roof? (c, d)	c
shell height of tank (feet)	8.5
average liquid height (feet)	4
are the roof and shell the same color? (yes,no)	yes
For roof: color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
----This row only used if shell is different color from roof----	
----This row only used if shell is different color from roof----	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
-----This row only used if flashing losses occur in this tank-----		
-----This row only used if flashing losses occur in this tank-----		
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		78.40
daily minimum ambient temperature, Tan (°F)		50.08
daily total solar insulation factor, I (Btu/ft^2-day)		1838.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4167
vapor space volume, Vv (cubic feet)		6178.47
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	458	1.25
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	458	1.3

Summary Table	
Permit Number	C-311-170
Facility Tank I.D.	25D-37
Tank capacity (bbl)	1,900
Tank diameter (ft)	40
Tank shell height (ft)	8.5
Conical or Dome Roof	Conical
Maximum Daily Fluid Throughput (bbl/day)	-
Maximum Annual Fluid Throughput (bbl/year)	-
Maximum Daily Oil Throughput (bbl/day)	N/A
Maximum Annual Oil Throughput (bbl/year)	N\A
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	1.3
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	458

Tank Input Data	
permit number (S-xxxx-xx-xx)	**177**
facility tank I.D.	**25D-42**
nearest city {1: Bakersfield, 2: Fresno, 3: Stockton}	**2**
tank ROC vapor pressure (psia)	**0.1**
liquid bulk storage temperature, Tb (°F)	**153**
is this a constant-level tank? **{yes, no}**	**yes**
will flashing losses occur in this tank (only if first-line tank)? **{yes, no}**	**no**
breather vent pressure setting range (psi)	**0.06**
diameter of tank (feet)	**47.5**
capacity of tank (bbl)	**5,000**
conical or dome roof? **{c, d}**	**c**
shell height of tank (feet)	**16**
average liquid height (feet)	**14**
are the roof and shell the same color? **{yes,no}**	**yes**
For roof: color {1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White}	**4**
condition {1: Good, 2: Poor}	**1**
------This row only used if shell is different color from roof------	
------This row only used if shell is different color from roof------	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		**28,750**
maximum annual fluid throughput (bbl)		10,493,750
------This row only used if flashing losses occur in this tank------		
------This row only used if flashing losses occur in this tank------		-
molecular weight, Mw (lb/lb-mol)		**100**

Calculated Values	**A**	**B**
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4948
vapor space volume, Vv (cubic feet)		4420.91
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	327	0.90
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	**327**	**0.9**

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-196
facility tank I.D.	13-29
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	39
capacity of tank (bbl)	5,000
conical or dome roof? (c, d)	c
shell height of tank (feet)	24
average liquid height (feet)	19
are the roof and shell the same color? (yes,no)	yes
For roof: color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
----This row only used if shell is different color from roof----	
----This row only used if shell is different color from roof----	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
----This row only used if flashing losses occur in this tank----		
----This row only used if flashing losses occur in this tank----		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4063
vapor space volume, Vv (cubic feet)		6458.26
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	478	1.31
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	478	1.3

Summary Table	
Permit Number	C-311-196
Facility Tank I.D.	13-29
Tank capacity (bbl)	5,000
Tank diameter (ft)	39
Tank shell height (ft)	24
Conical or Dome Roof	Conical
Maximum Daily Fluid Throughput (bbl/day)	-
Maximum Annual Fluid Throughput (bbl/year)	-
Maximum Daily Oil Throughput (bbl/day)	N/A
Maximum Annual Oil Throughput (bbl/year)	N\A
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	1.3
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	478

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-197
facility tank I.D.	13-20
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	163
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	39
capacity of tank (bbl)	5,000
conical or dome roof? (c, d)	c
shell height of tank (feet)	24
average liquid height (feet)	19
are the roof and shell the same color? (yes,no)	yes
For roof:	
color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
----This row only used if shell is different color from roof----	
----This row only used if shell is different color from roof----	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
----This row only used if flashing losses occur in this tank----		
----This row only used if flashing losses occur in this tank----		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4063
vapor space volume, Vv (cubic feet)		8458.26
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	478	1.31
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	478	1.3

Summary Table	
Permit Number	C-311-197
Facility Tank I.D.	13-20
Tank capacity (bbl)	5,000
Tank diameter (ft)	39
Tank shell height (ft)	24
Conical or Dome Roof	Conical
Maximum Daily Fluid Throughput (bbl/day)	-
Maximum Annual Fluid Throughput (bbl/year)	-
Maximum Daily Oil Throughput (bbl/day)	N/A
Maximum Annual Oil Throughput (bbl/year)	N/A
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	1.3
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	478

Tank Input Data	
permit number (S-xxxx-xx-xx)	-236
facility tank I.D.	13-19
nearest city {1: Bakersfield, 2: Fresno, 3: Stockton}	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? **{yes, no}**	yes
will flashing losses occur in this tank (only if first-line tank)? **{yes, no}**	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	39
capacity of tank (bbl)	5,000
conical or dome roof? **{c, d}**	c
shell height of tank (feet)	24
average liquid height (feet)	4
are the roof and shell the same color? **{yes,no}**	yes
For roof: color {1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White}	4
condition {1: Good, 2: Poor}	1
------This row only used if shell is different color from roof------	
------This row only used if shell is different color from roof------	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		28,750
maximum annual fluid throughput (bbl)		10,493,750
------This row only used if flashing losses occur in this tank------		
------This row only used if flashing losses occur in this tank------		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4063
vapor space volume, Vv (cubic feet)		24377.11
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	1,806	4.95
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	**1,806**	**4.9**

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-271
facility tank I.D.	13-13A
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	163
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	40
capacity of tank (bbl)	3,500
conical or dome roof? (c, d)	c
shell height of tank (feet)	16
average liquid height (feet)	12
are the roof and shell the same color? (yes,no)	yes
For roof, color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
---This row only used if shell is different color from roof---	
---This row only used if shell is different color from roof---	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
-----This row only used if flashing losses occur in this tank-----		
-----This row only used if flashing losses occur in this tank-----		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		76.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.4187
vapor space volume, Vv (cubic feet)		5550.15
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	411	1.13
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	411	1.1

Summary Table	
Permit Number	**C-311-271**
Facility Tank I.D.	**13-13A**
Tank capacity (bbl)	**3,500**
Tank diameter (ft)	**40**
Tank shell height (ft)	**16**
Conical or Dome Roof	**Conical**
Maximum Daily Fluid Throughput (bbl/day)	**-**
Maximum Annual Fluid Throughput (bbl/year)	**-**
Maximum Daily Oil Throughput (bbl/day)	**N/A**
Maximum Annual Oil Throughput (bbl/year)	**N\A**
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	**1.1**
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	**411**

Tank Input Data	
permit number (S-xxxx-xx-xx)	C-311-198
facility tank I.D.	13-13
nearest city (1: Bakersfield, 2: Fresno, 3: Stockton)	2
tank ROC vapor pressure (psia)	0.1
liquid bulk storage temperature, Tb (°F)	153
is this a constant-level tank? (yes, no)	yes
will flashing losses occur in this tank (only if first-line tank)? (yes, no)	no
breather vent pressure setting range (psi)	0.06
diameter of tank (feet)	14
capacity of tank (bbl)	270
conical or dome roof? (c, d)	c
shell height of tank (feet)	9
average liquid height (feet)	7
are the roof and shell the same color? (yes,no)	yes
For roof: color (1:Spec Al, 2:Diff Al, 3:Light, 4:Med, 5:Red, 6:White)	4
condition (1: Good, 2: Poor)	1
——This row only used if shell is different color from roof——	
——This row only used if shell is different color from roof——	

Liquid Input Data	A	B
maximum daily fluid throughput (bbl)		
maximum annual fluid throughput (bbl)		
——This row only used if flashing losses occur in this tank——		
——This row only used if flashing losses occur in this tank——		-
molecular weight, Mw (lb/lb-mol)		100

Calculated Values	A	B
daily maximum ambient temperature, Tax (°F)		78.49
daily minimum ambient temperature, Tan (°F)		50.06
daily total solar insulation factor, I (Btu/ft^2-day)		1636.3
atmospheric pressure, Pa (psia)		14.56
water vapor pressure at daily maximum liquid surface temperature (Tlx), Pvx (psia	128.1	2.1259
water vapor pressure at daily minimum liquid surface temperature (Tln), Pvn (psia	116.5	1.5482
water vapor pressure at average liquid surface temperature (Tla), Pva (psia)	122.3	1.8174
roof outage, Hro (feet)		0.1458
vapor space volume, Vv (cubic feet)		330.33
paint factor, alpha		0.68
vapor density, Wv (lb/cubic foot)		0.0016
daily vapor temperature range, delta Tv (degrees Rankine)		50.18
vapor space expansion factor, Ke		0.1268

Results	lb/year	lb/day
Standing Storage Loss	24	0.07
Working Loss	N/A	N/A
Flashing Loss	N/A	N/A
Total Uncontrolled Tank VOC Emissions	24	0.1

Summary Table	
Permit Number	**C-311-198**
Facility Tank I.D.	**13-13**
Tank capacity (bbl)	**270**
Tank diameter (ft)	**14**
Tank shell height (ft)	**9**
Conical or Dome Roof	**Conical**
Maximum Daily Fluid Throughput (bbl/day)	**-**
Maximum Annual Fluid Throughput (bbl/year)	**-**
Maximum Daily Oil Throughput (bbl/day)	**N/A**
Maximum Annual Oil Throughput (bbl/year)	**N\A**
Total Uncontrolled Daily Tank VOC Emissions (lb/day)	**0.1**
Total Uncontrolled Annual Tank VOC Emissions (lb/year)	**24**

Chevron USA Inc
C-311, C-1161067

Attachment IV
Gas Analyses

OILFIELD ENVIRONMENTAL & COMPLIANCE, INC.

Client:	Chevron	SAMPLE ID:	1303072-4	
	39405 S. Derrick Ave.	Date Sampled:	7/1/13 9:38 AM	
	Coalinga, CA 93210	Date Analyzed:	7/2/13 9:16 AM	
Attn:	Aric Murfield	Lab Contact:	J. Carstens	
Facility:	Coalinga	Meter:	NA	
Description:	25D Casing Gas / SOX Compliance Gas	Pressure:	16	psig
Note:	Coalinga Monthly Gas Sampling	Temp:	103	°F

Gas Analysis by Chromatography - ASTM D 1945/3588

All results reported at 60°F and 14.696 psia.

Component	Mole %	Weight %	G/MCF
Oxygen	0.36	0.29	-
Nitrogen	0.94	0.66	-
Hydrogen	0.00	0.00	-
Carbon Dioxide	85.13	93.17	-
Hydrogen Sulfide	0.51	0.43	-
Methane	12.85	5.13	-
Ethane	0.06	0.04	0.015
Propane	0.03	0.04	0.009
i-Butane	0.00	0.00	0.000
n-Butane	0.02	0.03	0.008
neo-Pentane	0.00	0.00	0.000
i-Pentane	0.01	0.02	0.005
n-Pentane	0.00	0.00	0.000
2,2-Dimethylbutane	0.00	0.00	0.000
2,3-Dimethylbutane	0.02	0.04	0.008
2-Methylpentane	0.00	0.00	0.000
3-Methylpentane	0.00	0.00	0.000
n-Hexane	0.00	0.00	0.000
Hexanes Plus	0.07	0.15	0.029
Totals	100.0	100.0	0.073

Specific Gravity, Calculated	1.3882	air = 1		CHONS	Weight %
Compressibility (Z) Factor	0.9949			Carbon	29.52
Average Molecular Weight	40.21			Hydrogen	1.37
Gross Calorific Value				Oxygen	68.02
BTU/ft^3 dry	140.3			Nitrogen	0.66
BTU/ft^3 wet	137.8			Sulfur	0.43
Net Calorific Value					
BTU/ft^3 dry	126.5		EPA 'F' Factor (60°F, 1ATM)		15659.6
BTU/ft^3 wet	124.3		SDCF/MMBTU		
Hydrogen Sulfide : 4,900.00 ppm			VOC'S (% by wt. C-3+)		0.28

ND: None Detected NA: Not Analyzed G/MCF: Gallons/Thousand Cubic Feet

307 ROEMER WAY | SUITE 300 | SANTA MARIA | CA 93454 | (805) 922-4772 | FAX (805) 925-3376

OILFIELD ENVIRONMENTAL & COMPLIANCE, INC.

Client:	Chevron	SAMPLE ID:	1303072-5
	39405 S. Derrick Ave.	Date Sampled:	7/1/13 11:00 AM
	Coalinga, CA 93210	Date Analyzed:	7/2/13 9:26 AM
Attn:	Aric Murfield	Lab Contact:	J. Carstens
Facility:	Coalinga	Meter:	NA
Description:	13D OCP VRU Gas	Pressure:	20 psig
Note:	Coalinga Monthly Gas Sampling	Temp:	142 °F

Gas Analysis by Chromatography - ASTM D 1945/3588

All results reported at 60°F and 14.696 psia.

Component	Mole %	Weight %	G/MCF
Oxygen	0.10	0.09	-
Nitrogen	2.63	2.10	-
Hydrogen	0.00	0.00	-
Carbon Dioxide	66.38	83.30	-
Hydrogen Sulfide	0.34	0.33	-
Methane	30.31	13.87	-
Ethane	0.11	0.10	0.030
Propane	0.05	0.06	0.014
i-Butane	0.02	0.03	0.006
n-Butane	0.02	0.03	0.006
neo-Pentane	0.01	0.02	0.004
i-Pentane	0.00	0.00	0.000
n-Pentane	0.00	0.00	0.000
2,2-Dimethylbutane	0.00	0.00	0.000
2,3-Dimethylbutane	0.01	0.03	0.005
2-Methylpentane	0.00	0.00	0.000
3-Methylpentane	0.00	0.00	0.000
n-Hexane	0.00	0.00	0.000
Hexanes Plus	0.01	0.03	0.005
Totals	100.0	100.0	0.070

Specific Gravity, Calculated	1.2108	air = 1		CHONS	Weight %
Compressibility (Z) Factor	0.9958			Carbon	33.35
Average Molecular Weight	35.07			Hydrogen	3.56
Gross Calorific Value				Oxygen	60.65
BTU/ft^3 dry	314.3			Nitrogen	2.10
BTU/ft^3 wet	308.8			Sulfur	0.33
Net Calorific Value					
BTU/ft^3 dry	283.2		EPA 'F' Factor (60°F, 1ATM)		11665.6
BTU/ft^3 wet	278.2		SDCF/MMBTU		
Hydrogen Sulfide : 3,300.00 ppm			VOC'S (% by wt. C-3+)		0.20

ND: None Detected NA: Not Analyzed G/MCF: Gallons/Thousand Cubic Feet

307 ROEMER WAY | SUITE 300 | SANTA MARIA | CA 93454 | (805) 922-4772 | FAX (805) 925-3376

OILFIELD ENVIRONMENTAL & COMPLIANCE, INC.

Client:	Chevron	SAMPLE ID:	1303072-6	
	39405 S. Derrick Ave.	Date Sampled:	7/1/13 10:05 AM	
	Coalinga, CA 93210	Date Analyzed:	7/2/13 9:47 AM	
Attn:	Aric Murfield	Lab Contact:	J. Carstens	
Facility:	Coalinga	Meter:	NA	
Description:	26D OCP VRU Discharge Gas	Pressure:	6	psig
Note:	Coalinga Monthly Gas Sampling	Temp:	106	°F

Gas Analysis by Chromatography - ASTM D 1945/3588

All results reported at 60°F and 14.696 psia.

Component	Mole %	Weight %	GPM
Oxygen	0.28	0.26	-
Nitrogen	0.83	0.67	-
Hydrogen	0.00	0.00	-
Carbon Dioxide	64.95	82.76	-
Hydrogen Sulfide	0.01	0.01	-
Methane	33.44	15.53	-
Ethane	0.18	0.15	0.047
Propane	0.08	0.11	0.023
i-Butane	0.02	0.03	0.007
n-Butane	0.05	0.08	0.015
neo-Pentane	0.00	0.00	0.000
i-Pentane	0.04	0.08	0.014
n-Pentane	0.00	0.00	0.000
2,2-Dimethylbutane	0.00	0.00	0.000
2,3-Dimethylbutane	0.03	0.08	0.012
2-Methylpentane	0.00	0.00	0.000
3-Methylpentane	0.00	0.00	0.000
n-Hexane	0.00	0.00	0.000
Hexanes Plus	0.09	0.23	0.039
Totals	100.0	100.0	0.157

Specific Gravity, Calculated	1.1924	air = 1	CHONS	Weight %
Compressibility (Z) Factor	0.9958		Carbon	34.85
Average Molecular Weight	34.54		Hydrogen	4.04
Gross Calorific Value			Oxygen	60.43
BTU/ft³ dry	352.5		Nitrogen	0.67
BTU/ft³ wet	346.4		Sulfur	0.01
Net Calorific Value				
BTU/ft³ dry	317.7		EPA 'F' Factor (60°F, 1ATM)	11330.3
BTU/ft³ wet	312.2		SDCF/MMBTU	
Hydrogen Sulfide : 130.00 ppm			VOC'S (% by wt. C-3+)	0.60

ND: None Detected NA: Not Analyzed G/MCF: Gallons/Thousand Cubic Feet

BC Laboratories, Inc.
Environmental Testing Laboratory Since 1949

Safety Management Systems
5000 California Ave., Suite 210
Bakersfield, CA 93309

Reported: 07/21/2014 17:39
Project: Miscellaneous Samples
Project Number: Chevron BU Well 34 Casing Gas Line
Project Manager: Scott Love

BCL Sample ID: 1416178-01 | Client Sample Name: 717-34-01 Gas, 7/17/2014 1:30:00PM, James Hester

Gas Analysis

Fixed Gases and Hydrocarbon Analysis (ASTM D-1945-03, D-3588-98; GPA 2145-94, 2261-00)

Constituent		Mole %	Weight %	GPM	GPM Fractions	
Oxygen	O2	0.62	0.98			
Nitrogen	N2	18.79	26.06			
Carbon Dioxide	CO2	6.02	13.12			
Carbon Monoxide	CO	0.00	0.00			
Hydrogen	H2	0.00	0.00			
Hydrogen Sulfide	H2S	0.25	0.43			
Methane	C1	73.91	58.70			
Ethane	C2	0.30	0.45	0.078	(C2+)=	0.108
Propane	C3	0.07	0.15	0.019	(C3+)=	0.030
IsoButane	C4	0.01	0.04	0.004		
n-Butane	C4	0.01	0.02	0.003		
IsoPentane	C5	0.00	0.00	0.000		
n-Pentane	C5	0.00	0.00	0.000		
Hexanes +	C6	0.01	0.04	0.004		
Totals:		100.00	100.00	0.108		

H/C Ratio: 0.31

Heating Values		CHONS Weight %		F Factors	F_{dry}	F_{wet}
Gross Calorific Value		Carbon	48.10	"F" Factor, DSCF/MMBTU @ 60F	8797.4	9768.3
BTU/ft3 dry (ideal)	756.4	Hydrogen	14.91	"F" Factor, DSCF/MMBTU @ 68F	8931.4	9917.0
BTU/ft3 wet (ideal)	743.2	Oxygen	10.52	"F" Factor, DSCF/MMBTU @ 70F	8965.3	9954.7
BTU/lb (ideal)	14210.6	Nitrogen	26.06	"FC" Factor, DSCF CO2/MMBTU @ 60F	1070.2	1188.3
Net Calorific Value		Sulfur	0.40	"FC" Factor, DSCF CO2/MMBTU @ 68F	1086.5	1206.4
BTU/ft3 dry (ideal)	681.2	*Sulfur reported at 0.05% or greater*				
BTU/ft3 wet (ideal)	669.4					
BTU/lb (ideal)	12798.2					

Relative Gas Density; [Air=1] Ideal:	0.6974	Relative Liquid Density @ 60F/60F:	0.4048
Specific Gravity; [Air=1] Ideal:	0.6982	Compressibility, 'z':	0.9983
Real Gas Density, lb/ft3:	0.0533	Molecular Wt. (kg/kg-mole):	20.11
Specific Volume, ft3/lb:	18.7545		

Gas Properties calculated @ STP: 60F, 14.696 psia GPM: Gallons per 1000 cubic feet

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.
All results listed in this report are for the exclusive use of the submitting party. BC Laboratories, Inc. assumes no responsibility for report alteration, separation, detachment or third party interpretation.

OILFIELD ENVIRONMENTAL AND COMPLIANCE

Client:	Chevron North America Exploration And Production	SAMPLE ID:	1205543-4
	39405 Derrick Ave.	Date Sampled:	11/05/12 @ 1006
	Coalinga, CA 93210	Date Analyzed:	11/05/12 @ 1403
Attn:	Bikky Summers	Lab Contact:	J. Carstens
Facility:	Coalinga	Meter:	NA
Description:	25D Casing Gas / SOX Compliance Gas	Pressure:	7.0 psig
Note:	Coalinga Monthly Gas Sampling	Temp:	82 °F

Gas Analysis by Chromatography - ASTM D 1945/3588

Component	Mole %	Weight %	G/MCF
Oxygen	0.04	0.03	-
Nitrogen	0.40	0.29	-
Hydrogen	0.00	0.00	-
Carbon Dioxide	80.66	91.39	-
Hydrogen Sulfide	0.37	0.32	-
Methane	17.98	7.42	-
Ethane	0.39	0.30	0.100
Propane	0.08	0.09	0.022
i-Butane	0.02	0.02	0.005
n-Butane	0.04	0.05	0.011
neo-Pentane	0.00	0.00	0.000
i-Pentane	0.02	0.04	0.008
n-Pentane	0.01	0.02	0.004
2,2-Dimethylbutane	0.00	0.00	0.000
2,3-Dimethylbutane	0.00	0.00	0.000
2-Methylpentane	0.00	0.00	0.000
3-Methylpentane	0.00	0.00	0.000
n-Hexane	0.00	0.00	0.000
Hexanes Plus	0.00	0.00	0.000
Totals	100.0	100.0	0.149

Specific Gravity, Calculated	1.3410	air = 1	CHONS	Weight %
Compressibility (Z) Factor	0.9951		Carbon	30.93
Average Molecular Weight	38.84		Hydrogen	1.99
Gross Calorific Value			Oxygen	66.47
BTU/ft^3 dry	195.7		Nitrogen	0.29
BTU/ft^3 wet	192.3		Sulfur	0.32
Net Calorific Value				
BTU/ft^3 dry	176.5		EPA 'F' Factor (60°F, 1ATM)	12538.8
BTU/ft^3 wet	173.4		SDCF/MMBTU	
Hydrogen Sulfide 3,500 ppm			VOC'S (% by wt. C-3+)	0.23

ND: None Detected NA: Not Analyzed G/MCF: Gallons/Thousand Cubic Feet

OILFIELD ENVIRONMENTAL AND COMPLIANCE

Client:	Chevron North America Exploration And Production	SAMPLE ID:	1205543-6
	39405 Derrick Ave.	Date Sampled:	11/05/12 @ 0928
	Coalinga, CA 93210	Date Analyzed:	11/05/12 @ 1437
Attn:	Bikky Summers	Lab Contact:	J. Carstens
Facility:	Coalinga	Meter:	NA
Description:	13D OCP VRU Gas	Pressure:	26 psig
Note:	Coalinga Monthly Gas Sampling	Temp:	147 °F

Gas Analysis by Chromatography - ASTM D 1945/3588

Component	Mole %	Weight %	G/MCF
Oxygen	6.55	6.66	-
Nitrogen	25.69	22.53	-
Hydrogen	0.00	0.00	-
Carbon Dioxide	41.60	57.30	-
Hydrogen Sulfide	0.25	0.27	-
Methane	25.32	12.71	-
Ethane	0.47	0.44	0.119
Propane	0.08	0.11	0.022
I-Butane	0.01	0.03	0.005
n-Butane	0.03	0.05	0.009
neo-Pentane	0.00	0.00	0.000
I-Pentane	0.00	0.00	0.000
n-Pentane	0.00	0.00	0.000
2,2-Dimethylbutane	0.00	0.00	0.000
2,3-Dimethylbutane	0.00	0.00	0.000
2-Methylpentane	0.00	0.00	0.000
3-Methylpentane	0.00	0.00	0.000
n-Hexane	0.00	0.00	0.000
Hexanes Plus	0.00	0.00	0.000
Totals	100.0	100.0	0.154

Specific Gravity, Calculated	1.1031	air = 1	CHONS	Weight %
Compressibility (Z) Factor	0.9975		Carbon	25.66
Average Molecular Weight	31.95		Hydrogen	3.33
Gross Calorific Value			Oxygen	48.21
BTU/ft^3 dry	269.0		Nitrogen	22.53
BTU/ft^3 wet	264.3		Sulfur	0.27
Net Calorific Value				
BTU/ft^3 dry	242.4		EPA 'F' Factor (60°F, 1ATM)	11185.8
BTU/ft^3 wet	238.2		SDCF/MMBTU	
Hydrogen Sulfide 2,500 ppm			VOC'S (% by wt. C-3+)	0.19

ND: None Detected NA: Not Analyzed G/MCF: Gallons/Thousand Cubic Feet

Attachment V
Emissions Profiles

Application Emissions

Permit #: C-311-146-23 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	8.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.3
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	2.0
Q2:	0.0	0.0	0.0	0.0	2.0
Q3:	0.0	0.0	0.0	0.0	2.0
Q4:	0.0	0.0	0.0	0.0	2.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-147-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	8.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.3
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	2.0
Q2:	0.0	0.0	0.0	0.0	2.0
Q3:	0.0	0.0	0.0	0.0	2.0
Q4:	0.0	0.0	0.0	0.0	2.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-150-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	33.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	1.3
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	8.0
Q2:	0.0	0.0	0.0	0.0	8.0
Q3:	0.0	0.0	0.0	0.0	8.0
Q4:	0.0	0.0	0.0	0.0	9.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-163-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	22.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.9
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	5.0
Q2:	0.0	0.0	0.0	0.0	5.0
Q3:	0.0	0.0	0.0	0.0	6.0
Q4:	0.0	0.0	0.0	0.0	6.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-164-14 Last Updated
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	22.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.9
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	5.0
Q2:	0.0	0.0	0.0	0.0	5.0
Q3:	0.0	0.0	0.0	0.0	6.0
Q4:	0.0	0.0	0.0	0.0	6.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-165-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	25.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	1.0
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	6.0
Q2:	0.0	0.0	0.0	0.0	6.0
Q3:	0.0	0.0	0.0	0.0	6.0
Q4:	0.0	0.0	0.0	0.0	7.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-166-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	25.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	1.0
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	6.0
Q2:	0.0	0.0	0.0	0.0	6.0
Q3:	0.0	0.0	0.0	0.0	6.0
Q4:	0.0	0.0	0.0	0.0	7.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-167-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	54.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	2.1
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	13.0
Q2:	0.0	0.0	0.0	0.0	13.0
Q3:	0.0	0.0	0.0	0.0	14.0
Q4:	0.0	0.0	0.0	0.0	14.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Permit #: C-311-168-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	54.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	2.1
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	13.0
Q2:	0.0	0.0	0.0	0.0	13.0
Q3:	0.0	0.0	0.0	0.0	14.0
Q4:	0.0	0.0	0.0	0.0	14.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-169-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	22.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.9
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	5.0
Q2:	0.0	0.0	0.0	0.0	5.0
Q3:	0.0	0.0	0.0	0.0	6.0
Q4:	0.0	0.0	0.0	0.0	6.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-170-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	31.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	1.3
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	7.0
Q2:	0.0	0.0	0.0	0.0	8.0
Q3:	0.0	0.0	0.0	0.0	8.0
Q4:	0.0	0.0	0.0	0.0	8.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-177-17 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	22.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.0
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	5.0
Q2:	0.0	0.0	0.0	0.0	5.0
Q3:	0.0	0.0	0.0	0.0	6.0
Q4:	0.0	0.0	0.0	0.0	6.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-196-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	33.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	1.3
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	8.0
Q2:	0.0	0.0	0.0	0.0	8.0
Q3:	0.0	0.0	0.0	0.0	8.0
Q4:	0.0	0.0	0.0	0.0	9.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-197-14 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	33.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	1.3
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	8.0
Q2:	0.0	0.0	0.0	0.0	8.0
Q3:	0.0	0.0	0.0	0.0	8.0
Q4:	0.0	0.0	0.0	0.0	9.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-198-14 Last Updated
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	2.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.1
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	0.0
Q2:	0.0	0.0	0.0	0.0	0.0
Q3:	0.0	0.0	0.0	0.0	1.0
Q4:	0.0	0.0	0.0	0.0	1.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-236-8 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	124.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	4.9
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	31.0
Q2:	0.0	0.0	0.0	0.0	31.0
Q3:	0.0	0.0	0.0	0.0	31.0
Q4:	0.0	0.0	0.0	0.0	31.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-267-4 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	0.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.0
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	0.0
Q2:	0.0	0.0	0.0	0.0	0.0
Q3:	0.0	0.0	0.0	0.0	0.0
Q4:	0.0	0.0	0.0	0.0	0.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					1.5
Quarterly Offset Amounts (lb/Qtr)					
Q1:					62.0
Q2:					63.0
Q3:					63.0
Q4:					63.0

Application Emissions

Permit #: C-311-267-5 **Last Updated**
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	0.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.0
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	0.0
Q2:	0.0	0.0	0.0	0.0	0.0
Q3:	0.0	0.0	0.0	0.0	0.0
Q4:	0.0	0.0	0.0	0.0	0.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Application Emissions

Permit #: C-311-268-2 Last Updated
Facility: CHEVRON USA INC 09/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	0.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	0.0
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	0.0
Q2:	0.0	0.0	0.0	0.0	0.0
Q3:	0.0	0.0	0.0	0.0	0.0
Q4:	0.0	0.0	0.0	0.0	0.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					1.5
Quarterly Offset Amounts (lb/Qtr)					
Q1:					69.0
Q2:					69.0
Q3:					69.0
Q4:					70.0

Application Emissions

Permit #: C-311-271-1 **Last Updated**
Facility: CHEVRON USA INC 11/01/2016 EDGEHILR

Equipment Pre-Baselined: NO

	NOX	SOX	PM10	CO	VOC
Potential to Emit (lb/Yr):	0.0	0.0	0.0	0.0	28.0
Daily Emis. Limit (lb/Day)	0.0	0.0	0.0	0.0	1.1
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	0.0	0.0	0.0	0.0	7.0
Q2:	0.0	0.0	0.0	0.0	7.0
Q3:	0.0	0.0	0.0	0.0	7.0
Q4:	0.0	0.0	0.0	0.0	7.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Chevron USA Inc
C-311, C-1161067

Attachment VI
BACT Guideline

Best Available Control Technology (BACT) Guideline 7.3.1
Last Update: 10/1/2002

Petroleum and Petrochemical Production - Fixed Roof Organic Liquid Storage or Processing Tank, < 5,000 bbl Tank capacity **

Pollutant	Achieved in Practice or in the SIP	Technologically Feasible	Alternate Basic Equipment
VOC	PV-vent set to within 10% of maximum allowable pressure	99% control (Waste gas incinerated in steam generator, heater treater, or other fired equipment and inspection and maintenance program; transfer of noncondensable vapors to gas pipeline; reinjection to formation (if appropriate wells are available); or equal).	

*** Converted from Determinations 7.1.11 (10/01/02).*

BACT is the most stringent control technique for the emissions unit and class of source. Control techniques that are not achieved in practice or contained in s a state implementation plan must be cost effective as well as feasible. Economic analysis to demonstrate cost effectiveness is required for all determinations that are not achieved in practice or contained in an EPA approved State Implementation Plan.

ATTACHMENT VII
Top-Down BACT Analysis

Top-Down BACT Analysis

VOC emissions occur with temporary disconnection of the tank vapor control system for maintenance and repair activities, process upsets, and equipment breakdowns. There is no current BACT Guideline for this highly unusual, nonroutine, activity. Therefore, a project specific BACT analysis will be done. This project-specific BACT analysis is based on a similar analysis done for project S-1142757.

Step 1 - Identify All Possible Control Technologies

There is no applicable BACT Guideline for this class and category of equipment.
The following control technologies have been identified:

VOC: Work practices to minimize VOC emissions (Achieved-in-Practice) including:

- Near constant level tank operation
- Use of operational P/V valve where possible
- Work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts
- Minimization of tank openings and liquid drainage from disconnects
- Inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work.

Step 2 - Eliminate Technologically Infeasible Options

All of the above identified control options are technologically feasible.

Step 3 - Rank Remaining Control Technologies by Control Effectiveness

VOC: Work practices to minimize VOC emissions (Achieved-in-Practice) including:

- Near constant level tank operation
- Use of operational P/V valve where possible
- Work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts
- Minimization of tank openings and liquid drainage from disconnects
- Inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work.

Step 4 - Cost Effectiveness Analysis

Applicant has selected the only option listed above and therefore a cost analysis is not required.

Step 5 - Select BACT

VOC: Work practices to minimize VOC emissions (Achieved-in-Practice) as stated in the following ATC condition:

- During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: near constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, storage of coatings, adhesives, sealants, and organic solvents in closed containers, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201]

Attachment VII
Statewide Compliance Statement and Title V Compliance Certification Form

RECEIVED
MAR 3 1 2016
SJVAPCD
Southern Region

San Joaquin Valley
Unified Air Pollution Control District

TITLE V MODIFICATION - COMPLIANCE CERTIFICATION FORM

I. TYPE OF PERMIT ACTION (Check appropriate box)

[ ] SIGNIFICANT PERMIT MODIFICATION
[X] MINOR PERMIT MODIFICATION
[ ] ADMINISTRATIVE AMENDMENT

COMPANY NAME: CHEVRON U.S.A. INC.	FACILITY ID: C-311
1. Type of Organization: [X] Corporation [ ] Sole Ownership [ ] Government [ ] Partnership [ ] Utility	
2. Owner's Name: CHEVRON U.S.A. INC.	
3. Agent to the Owner: N/A	

II. COMPLIANCE CERTIFICATION (Read each statement carefully and initial **all** circles for confirmation):

(AL) Based on information and belief formed after reasonable inquiry, the equipment identified in this application will continue to comply with the applicable federal requirement(s).

(AL) Based on information and belief formed after reasonable inquiry, the equipment identified in this application will comply with applicable federal requirement(s) that will become effective during the permit term, on a timely basis.

(AL) Corrected information will be provided to the District when I become aware that incorrect or incomplete information has been submitted.

(AL) Based on information and belief formed after reasonable inquiry, information and statements in the submitted application package, including all accompanying reports, and required certifications are true accurate and complete.

I declare, under penalty of perjury under the laws of the state of California, that the forgoing is correct and true:

Albert R. Richardson
Signature of Responsible Official

3/31/16
Date

Albert Richardson
Name of Responsible Official (please print)

Operations Supervisor
Title of Responsible Official (please print)

Add maintenance provisions to 13D and 25D Tank VRU

Chevron

Donald Puckett
General Manager - Operations

San Joaquin Valley SBU
Chevron North America
Exploration and Production
P. O. Box 1392

January 13, 2015

Mr. Seyed Sadredin
San Joaquin Valley Air Pollution Control District
34946 Flyover Court
Bakersfield, CA 93308

RE: Statewide Compliance Certification

Dear Mr. Sadredin:

As required under District Rule 2201, Subsection 4.15.2 and Section 173(a)(3) of the Clean Air Act, 42 U.S.C. Section 7503, Chevron U.S.A. Inc. hereby submits this letter of certification regarding statewide compliance as of this date.

Based on reasonable inquiry and to the best of my knowledge and belief, the major stationary sources, as defined in the jurisdiction where the facilities are located, that are owned or operated by Chevron U.S.A. Inc. in the State of California as listed below are subject to emission limitations and are in compliance or on a schedule for compliance with all applicable emission limitations and standards under the Clean Air Act:

- El Segundo Refinery
- El Segundo Marketing Terminal
- Richmond Refinery
- Banta Marketing Terminal
- Huntington Beach Marketing Terminal
- Montebello Marketing Terminal
- Sacramento Marketing Terminal
- Van Nuys Marketing Terminal
- Cross Valley Carneras Gas Compressor Facility (Kern County)
- Kettleman City Pump Station (Kings County)
- 27G Pump Station (Kern County)

- San Joaquin Valley Business Unit:
  - Fresno County Heavy Oil Source (Coalinga)
  - Fresno County Natural Gas Source (Coalinga)
  - Kern County Central Heavy Oil Source (Kern River)
  - Kern County Western Heavy Oil Source (Midway Sunset & Cymric)
  - Kern County Western Light Oil Source (Midway Sunset, Cymric & Lost Hills)
  - Kern County Western Gas Source (Cymric & Lost Hills)
  - San Ardo (Monterey County)

Attachment VIII
HRA

San Joaquin Valley Air Pollution Control District
Risk Management Review

To:	Richard Edgehill, AQE – Permit Services
From:	Stephanie Pellegrini, AQS – Technical Services
Date:	September 29, 2016
Facility Name:	Chevron USA Inc.
Location:	North ½ of Section 13 & NW ¼ of Section 25, T20S, R14E
Application #(s):	C-311-146-23, '-147-14, '-150-14, '-163-14 thru '-170-14, '-177-17, '-196-14 thru '-198-14, -236-8, '-267-4, '-267-5, '-268-2, '-271-1
Project #:	C-1161067

A. RMR SUMMARY

RMR Summary			
Categories	**Oil Storage Tanks (Units 146-3 thru 271-1)**	**Project Totals**	**Facility Totals**
Prioritization Score	0.03	<1.0	<1.0
Acute Hazard Index	0.01	0.01	0.02
Chronic Hazard Index	0.00	0.00	0.00
Maximum Individual Cancer Risk	2.01E-10	2.01E-10	4.07E-06
T-BACT Required?	**No**		
Special Permit Requirements?	**No**		

B. RMR REPORT

I. Project Description

Technical Services received a request on September 1, 2016, to perform a Risk Management Review for a proposed modification to Oil Cleaning Plants (OCPs). The modification includes disconnection of tanks from the vapor control system (VCS) for up to 600 hours per year to allow the VCS to be inoperable for periods of maintenance and repair activities, process upsets, and equipment breakdowns.

An Ambient Air Quality Analysis was not required for this project because only VOC emissions were modeled.

II. Analysis

Toxic emissions from Oilfield Fugitives were calculated using emission factors derived from 1991 source tests of Central Valley sites, and input into the San Joaquin Valley APCD's Hazard Assessment and Reporting Program (SHARP). In accordance with the District's Risk Management Policy for Permitting New and Modified Sources (APR 1905, May 28,

2015), risks from the proposed unit's toxic emissions were prioritized using the procedure in the 1990 CAPCOA Facility Prioritization Guidelines. A refined health risk assessment was required. The AERMOD model was used, with the parameters outlined below and meteorological data for 2010-2014 from Coalinga to determine the dispersion factors (i.e., the predicted concentration or X divided by the normalized source strength or Q) for a receptor grid. These dispersion factors were input into the SHARP Program, which then used the Air Dispersion Modeling and Risk Tool (ADMRT) of the Hot Spots Analysis and Reporting Program Version 2 (HARP 2) to calculate the chronic and acute hazard indices and the carcinogenic risk for the project.

The following parameters were used for the review:

Modeling Parameters Units 146-271			
Source Type	Circular Area	**Location Type**	Rural
Closest Receptor (m)	720	**Type of Receptor**	Business

Analysis Parameters				
Tank ID	**VOC (lb/hr)***	**VOC (lb/yr)**	**Diameter (m)**	**Height (m)**
13D				
C-311-267-4 or -5	0	0		
C-311-146-23	0.013	8	9.14	4.88
C-311-147-14	0.013	8	9.14	4.88
C-311-150-14	0.055	33	11.9	7.32
C-311-196-14	0.055	33	11.9	7.32
C-311-197-14	0.055	33	11.9	7.32
C-311-198-14	0.003	2	4.27	2.74
C-311-236-8	0.207	124	11.9	7.32
C-311-271-1	0.047	28	12.2	4.88
25D				
C-311-268-2	0	0		
C-311-163-14	0.037	22	12.2	6.40
C-311-164-14	0.037	22	12.2	6.40
C-311-165-14	0.042	25	15.2	4.88
C-311-166-14	0.042	25	15.2	4.88
C-311-167-14	0.090	54	12.2	4.88
C-311-168-14	0.090	54	12.2	4.88
C-311-169-14	0.037	22	8.08	4.42
C-311-170-14	0.052	31	12.2	2.59
C-311-177-17	0.037	22	14.5	4.88

* Hourly emissions are based on each unit's annual emissions (lb/yr) divided by 600 hours per year.

III. Conclusion

The acute and chronic indices are below 1.0 and the cancer risk factor associated with the project is less than 1.0 in a million. **In accordance with the District's Risk Management Policy, the project is approved without Toxic Best Available Control Technology (T-BACT).**

These conclusions are based on the data provided by the applicant and the project engineer. Therefore, this analysis is valid only as long as the proposed data and parameters do not change.

IV. Attachments

A. RMR request from the project engineer
B. Additional information from the applicant/project engineer
C. Prioritization score w/ toxic emissions summary
D. Facility Summary

Chevron USA Inc
C-311, C-1161067

Attachment IX
Draft ATCs

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-146-23

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-23 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-146-23 : Nov 4 2016 8:54AM – EDGEHILR : Joint Inspection NOT Required

5. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

6. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

7. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

8. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

9. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

10. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

11. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

12. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

13. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

14. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

15. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

47. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

48. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-147-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 2,013 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-22 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726 • (559) 230-5900 • Fax (559) 230-6061

5. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

6. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

7. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

8. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

9. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

10. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

11. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

12. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

13. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

14. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

15. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

38. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

47. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

48. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

50. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

53. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-150-14 **ISSUANCE DATE:** DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14

EQUIPMENT DESCRIPTION:
MODIFICATION OF 5,103 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-18 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall be connected to vapor control when receiving production from TEOR wells operated with closed casing vents. [District Rule 2201]
4. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726 • (559) 230-5900 • Fax (559) 230-6061

5. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]
6. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit
7. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]
8. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit
10. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit
11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit
12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit
14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit
15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit
16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623]

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-163-14 **ISSUANCE DATE:** DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-31 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall be connected to vapor control when receiving production from TEOR wells operated with closed casing vents. [District Rule 2201]
4. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-163-14 : Nov 4 2016 8:54AM – EDGEHILR : Joint Inspection NOT Required

5. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

6. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

7. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

8. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

9. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

10. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

11. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rules 2520, 9.3.2 and 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

12. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

13. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rules 2520, 9.3.2 and 4623, 5.6.2] Federally Enforceable Through Title V Permit

14. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

15. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

16. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

18. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3]|Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
31. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
36. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

37. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

47. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

48. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

49. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

51. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

54. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

55. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-164-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 4,697 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-32 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall be connected to vapor control when receiving production from TEOR wells operated with closed casing vents. [District Rule 2201]
4. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-164-14 : Nov 4 2016 8:54AM – EDGEHILR : Joint Inspection NOT Required

5. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

6. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

7. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

8. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

9. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

10. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

11. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

12. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

13. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

14. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

15. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

16. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

18. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

37. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

47. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

48. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

49. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

51. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

54. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

55. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-165-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This Is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-165-14 : Nov 4 2016 8:54AM – EDGEHILR : Joint Inspection NOT Required

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

10. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-166-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 5,592 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-166-14 : Nov 4 2016 8:55AM – EDGEHILR : Joint Inspection NOT Required

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

8. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

9. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

10. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

11. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

12. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

13. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

14. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

37. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

45. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

46. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

47. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

48. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

49. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

50. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

51. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-167-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-33 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-167-14 : Nov 4 2016 8:55AM – EDGEHILR : Joint Inspection NOT Required

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

10. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-168-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 3,579 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-34 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-168-14 Nov 4 2016 8:55AM -- EDGEHILR : Joint Inspection NOT Required

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

10. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-169-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 1,424 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-60 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-169-14 : Nov 4 2016 8:55AM – EDGEHILR : Joint Inspection NOT Required

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

10. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

~~54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit~~

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-170-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 1,901 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 25-37 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-170-14 : Nov 4 2016 8:55AM – EDGEHILR : Joint Inspection NOT Required

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

10. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-177-17

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 5,047 BBL FIXED ROOF FREE WATER KNOCK OUT TANK # 25-42 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-268: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall be connected to vapor control when receiving production from TEOR wells operated with closed casing vents. [District Rule 2201]
4. Tank shall only vent to vapor recovery system, permit C-311-268, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-177-17 : Nov 4 2016 8:55AM – EDGEHILR : Joint Inspection NOT Required

5. Tank shall not be required to be served by vapor control system C-311-268 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

6. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

7. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

8. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

9. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

10. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

11. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

12. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

13. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

14. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

15. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

16. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

18. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections| [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
31. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
36. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

37. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

47. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

48. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

49. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

51. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

54. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

55. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-196-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13D **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 5,000 BBL FIXED ROOF WASH TANK # 13-29 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726 • (559) 230-5900 • Fax (559) 230-6061

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

10. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-197-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13D **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 5,000 BBL FIXED ROOF WASH TANK # 13-30 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-197-14 : Nov 4 2018 8:55AM -- EDGEHILR : Joint Inspection NOT Required

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

8. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

9. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

10. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

11. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

12. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

13. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

14. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

15. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

16. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

17. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

37. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

45. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

46. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

47. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

48. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

49. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

50. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

51. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-198-14

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13D **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 270 BBL FIXED ROOF CRUDE OIL TANK # 13-13 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
4. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726 • (559) 230-5900 • Fax (559) 230-6061

5. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

6. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

7. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

9. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

10. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

11. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

12. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

13. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

14. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

15. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

16. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

18. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

36. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

37. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

47. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

48. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

49. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

51. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

52. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

54. {941} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-236-8 **ISSUANCE DATE:** DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 5,100 BBL FIXED ROOF CRUDE OIL STORAGE TANK # 13-19 SERVED BY SHARED VAPOR RECOVERY SYSTEM PTO C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Tank shall be connected to vapor control when receiving production from TEOR wells operated with closed casing vents. [District Rule 2201]
4. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-236-8 Nov 4 2016 8:55AM – EDGEHILR Joint Inspection NOT Required

5. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]

6. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

7. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

8. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

9. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

10. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

11. Except as otherwise provided on this permit, this tank shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

12. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

13. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit

14. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7] Federally Enforceable Through Title V Permit

15. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623] Federally Enforceable Through Title V Permit

16. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3] Federally Enforceable Through Title V Permit

18. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4] Federally Enforceable Through Title V Permit

19. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

20. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

21. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

22. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

25. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit

26. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

27. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

28. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

29. When storing organic liquids of TVP of equal to or greater than 0.5 psia, to facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

30. When storing organic liquids of TVP of equal to or greater than 0.5 psia, this tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

31. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid having a TVP of 0.5 or greater is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

32. When storing organic liquids of TVP of equal to or greater than 0.5 psia, while performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

33. When storing organic liquids of TVP of equal to or greater than 0.5 psia, steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

34. When storing organic liquids of TVP of equal to or greater than 0.5 psia, during sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

35. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

36. When storing organic liquids of TVP of equal to or greater than 0.5 psia, permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

37. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080] Federally Enforceable Through Title V Permit

38. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080] Federally Enforceable Through Title V Permit

39. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080] Federally Enforceable Through Title V Permit

40. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

41. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080] Federally Enforceable Through Title V Permit

42. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080] Federally Enforceable Through Title V Permit

43. When storing organic liquids of TVP less than 0.5 psia, permittee shall conduct tank cleaning and maintenance operations in accordance with District approved procedure as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

44. When storing organic liquids of TVP less than 0.5 psia, tank may be disconnected from vapor control system during District approved cleaning and maintenance procedures as described in this permit. [District Rule 2080] Federally Enforceable Through Title V Permit

45. When storing organic liquids of TVP less than 0.5 psia, permittee shall notify the District Compliance division at least 72 hours prior to tank cleaning and vapor control system disconnection. [District Rule 2080] Federally Enforceable Through Title V Permit

46. When storing organic liquids of TVP less than 0.5 psia, the tank shall be cleaned using water, hot water, solvents with an initial boiling point of greater than 302 F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams VOC per liter or less. The tank sediment shall be used for road mix as allowed by Section 6.17 of District Rule 2020 (amended 12/19/02). [District Rule 2080] Federally Enforceable Through Title V Permit

47. When storing organic liquids of TVP less than 0.5 psia, steam cleaning shall be allowed only during December through March, or at locations where wastewater treatment facilities are limited. [District Rule 2080] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

48. When storing organic liquids of TVP less than 0.5 psia, within 96 hours after refilling the tank, the pressure relief valve seats and hatch seals shall be inspected for leaks using EPA Method 21 and the regular tank maintenance and inspection program shall resume. [District Rule 2080] Federally Enforceable Through Title V Permit

49. The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

50. The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

51. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

52. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1] Federally Enforceable Through Title V Permit

53. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623] Federally Enforceable Through Title V Permit

54. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080] Federally Enforceable Through Title V Permit

55. When storing organic liquids of TVP less than 0.5 psia, permittee shall maintain records of each period of cleaning and maintenance when the tank is disconnected or isolated from the vapor control system. Records shall include the date that tank cleaning was initiated, the date tank cleaning was completed, the method of tank cleaning used, and a description of internal and external tank repairs and maintenance performed. Such records shall be retained for a period of at least 5 years and shall be made readily available for District inspection upon request. [District Rule 2080] Federally Enforceable Through Title V Permit

56. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

PERMIT NO: C-311-267-4

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13 **TOWNSHIP:** 120S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-112, '-146, '-147, '-150, '-196, '-197, '-198, AND '-236, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: ADD PROVISIONS FOR TANKS TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR FOR MAINTENANCE, REPAIR, PROCESS UPSETS, AND EQUIPMENT BREAKDOWNS; REMOVE REFERENCES TO PERMIT UNIT C-311-112 FROM EQUIPMENT DESCRIPTION AND PERMIT CONDITION 5; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Prior to operating equipment under this Authority to Construct, permittee shall surrender VOC emission reduction credits for the following quantity of emissions: 1st quarter - 62 lb, 2nd quarter - 63 lb, 3rd quarter - 63 lb, and fourth quarter -63 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-267-4 : Nov 3 2016 9:03AM – EDGEHILR : Joint Inspection NOT Required

4. ERC Certificate Numbers C-1447-1, C-966-1, and S-904-1 (or a certificate split from this certificate) shall be used to supply the required offsets, unless a revised offsetting proposal is received and approved by the District, upon which this Authority to Construct shall be reissued, administratively specifying the new offsetting proposal. Original public noticing requirements, if any, shall be duplicated prior to reissuance of this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit

5. Vapor recovery system shall consist of a closed vent system that collects VOCs from District approved storage tanks and discharges to District approved VOC vapor recovery. The vapor recovery system shall be APCO-approved. The VOC vapor recovery system shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, vapor balance well vent/tank vapor recovery system, DOGGR-approved injection well(s) for disposal of vapors, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method(s) specified in this permit. [District Rule 4623, 5.1.1 and 5.6] Federally Enforceable Through Title V Permit

6. Vapor recovery system compressor shall activate before the pressure relief valve vents, on any of the units served by the vapor recovery equipment. The vapor recovery system does not serve tanks while they are disconnected during District authorized cleaning and maintenance events as allowed by those permits. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

7. The vapor recovery system may control the recovered well casing vapors from permit units C-311-77, '-78, '-83, and '-111 during operation of the casing collection system as a casing balance system. [District District Rule 2201and 4623] Federally Enforceable Through Title V Permit

8. The 13D system may be operated as a vapor balance well vent/tank vapor recovery system. When operated as a vapor balance system, valves associated with the 13D system may be closed to allow condensate and noncondensable gas to be displaced to the reservoir through wells served by the system. [District Rule 2201] Federally Enforceable Through Title V Permit

9. Operation of the casing collection system as a casing balance system shall not cause gas flow rates at the 6C, 13D and/or 25D Oil Cleaning Plant in excess of the design capacity of the tank vapor recovery compressor. [District Rule 2201] Federally Enforceable Through Title V Permit

10. Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-146, -147, -150, -196, -197, -198, and -236 for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

11. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, storage of coatings, adhesives, sealents, and organic solvents in closed containers, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

12. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]

13. Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

14. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

15. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, ASTM D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rule 1081] Federally Enforceable Through Title V Permit

16. Except as otherwise provided on this permit, vapor recovery system shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

18. All piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

19. Facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

20. Operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

21. Emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

22. Any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

23. If the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

24. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit

25. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

26. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

27. Operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

PERMIT NO: C-311-267-5

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 13 **TOWNSHIP:** 120S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 13D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-112, '-146, '-147, '-150, '-196, '-197, '-198, AND '-236 ____, INCLUDING TWO (2) 50 HP COMPRESSORS, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: CONNECT CRUDE OIL TANK C-311-271 TO VAPOR CONTROL SYSTEM; ADD PROVISIONS FOR TANK C-311-271 TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOUR PER YEAR

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. ATC shall be implemented concurrently with or subsequent to ATC C-311-267-4. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-267-5 : Nov 3 2016 9:03AM – EDGEHILR : Joint Inspection NOT Required

4. Vapor recovery system shall consist of a closed vent system that collects VOCs from District approved storage tanks and discharges to District approved VOC vapor recovery. The vapor recovery system shall be APCO-approved. The VOC vapor recovery system shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, vapor balance well vent/tank vapor recovery system, DOGGR-approved injection well(s) for disposal of vapors, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method(s) specified in this permit. [District Rule 4623, 5.1.1 and 5.6] Federally Enforceable Through Title V Permit

5. Vapor recovery system compressor shall activate before the pressure relief valve vents, on any of the units served by the vapor recovery equipment. The vapor recovery system does not serve tanks while they are disconnected during District authorized cleaning and maintenance events as allowed by those permits. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

6. The vapor recovery system may control the recovered well casing vapors from permit units C-311-77, '-78, '-83, and '-111 during operation of the casing collection system as a casing balance system. [District District Rule 2201and 4623] Federally Enforceable Through Title V Permit

7. The 13D system may be operated as a vapor balance well vent/tank vapor recovery system. When operated as a vapor balance system, valves associated with the 13D system may be closed to allow condensate and noncondensable gas to be displaced to the reservoir through wells served by the system. [District Rule 2201] Federally Enforceable Through Title V Permit

8. Operation of the casing collection system as a casing balance system shall not cause gas flow rates at the 6C, 13D and/or 25D Oil Cleaning Plant in excess of the design capacity of the tank vapor recovery compressor. [District Rule 2201] Federally Enforceable Through Title V Permit

9. Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-146, -147, -150, -196, -197, -198, -236, and -271 for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

10. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, storage of coatings, adhesives, sealents, and organic solvents in closed containers, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

11. Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

12. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit

13. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, ASTM D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rule 1081] Federally Enforceable Through Title V Permit

14. Except as otherwise provided on this permit, vapor recovery system shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

15. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

16. All piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

17. Facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

18. Operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

19. Emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

20. Any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

21. If the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

22. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit

23. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

24. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201] Federally Enforceable Through Title V Permit

25. Operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-268-2

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

SECTION: 25 **TOWNSHIP:** 20S **RANGE:** 14E

EQUIPMENT DESCRIPTION:
MODIFICATION OF 25D OIL CLEANING PLANT VAPOR RECOVERY SYSTEM, SERVING PERMIT UNITS C-311-163, '-164, '-165, '-166, '-167, '-168, '-169, '-170 AND '-177, INCLUDING 50 HP COMPRESSOR, TWO VERTICAL SCRUBBERS, FIN FAN COOLER, REGULATOR, AND VAPOR PIPING TO DISTRICT APPROVED STEAM GENERATORS C-311-20, '-21, '-25, '-28, '-30, '-36, '-37, '-38, '-39, '-40 AND/OR '-41, OR DOGGR APPROVED VAPOR DISPOSAL WELLS: ADD PROVISIONS FOR TANKS TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR FOR MAINTENANCE, REPAIR, PROCESS UPSETS, AND EQUIPMENT BREAKDOWNS; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Prior to operating equipment under this Authority to Construct, permittee shall surrender VOC emission reduction credits for the following quantity of emissions: 1st quarter - 69 lb, 2nd quarter - 69 lb, 3rd quarter - 69 lb, and fourth quarter -70 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

C-311-268-2 : Nov 3 2016 9:03AM – EDGEHILR : Joint Inspection NOT Required

4. ERC Certificate Numbers C-1447-1, C-966-1, and S-904-1 (or a certificate split from this certificate) shall be used to supply the required offsets, unless a revised offsetting proposal is received and approved by the District, upon which this Authority to Construct shall be reissued, administratively specifying the new offsetting proposal. Original public noticing requirements, if any, shall be duplicated prior to reissuance of this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit

5. Vapor control system may be inoperable during maintenance/repairs/upset conditions of tanks C-311-163, -164, -165, -166, -167, -168, -169, -170, and -177 for up to 600 hours per year. District-approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201] Federally Enforceable Through Title V Permit

6. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, storage of coatings, adhesives, sealents, and organic solvents in closed containers, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit

7. Vapor recovery system shall consist of a closed vent system that collects VOCs from District approved storage tanks and discharges to District approved VOC vapor recovery. The vapor recovery system shall be APCO-approved. The VOC vapor recovery system shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, vapor balance well vent/tank vapor recovery system, DOGGR-approved injection well(s) for disposal of vapors, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method(s) specified in this permit. [District Rule 4623, 5.1.1 and 5.6] Federally Enforceable Through Title V Permit

8. Vapor recovery system compressor shall activate before the pressure relief valve vents, on any of the units served by the vapor recovery equipment. The vapor recovery system does not serve tanks while they are disconnected during District authorized cleaning and maintenance events as allowed by those permits. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

9. The vapor recovery system may control the recovered well casing vapors from permit unit C-311-79 during operation of the casing collection system as a casing balance system. [District Rule 2201 and 4623] Federally Enforceable Through Title V Permit

10. The 25D system may be operated as a vapor balance well vent/tank vapor recovery system. When operated as a vapor balance system valves associated with the 25D system may be closed to allow condensate and noncondensable gas to be displaced to the reservoir through wells served by the system. [District Rule 2201] Federally Enforceable Through Title V Permit

11. Operation of the system as a balance system shall not cause gas flow rates at the 6C, 13D and/or 25D Oil Cleaning Plant in excess of the design capacity of the tank vapor recovery compressor. [District Rule 2201] Federally Enforceable Through Title V Permit

12. Maximum VOC content of vapor in the vapor recovery system shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit

13. Operator shall test VOC content of the vapors representative of 25D tank vapor recovery gas annually. [District Rule 2201] Federally Enforceable Through Title V Permit

14. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit

15. Except as otherwise provided on this permit, vapor recovery system shall be maintained in a leak-free condition. [District Rule 4623, 5.1.3 and 5.6] Federally Enforceable Through Title V Permit

16. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17] Federally Enforceable Through Title V Permit

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

17. All piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

18. Facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

19. Operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

20. Emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

21. Any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

22. If the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

23. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit

24. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

25. Operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

DRAFT

PERMIT NO: C-311-271-1

ISSUANCE DATE: DRAFT

LEGAL OWNER OR OPERATOR: CHEVRON USA INC
MAILING ADDRESS: PO BOX 1392
BAKERSFIELD, CA 93302

LOCATION: HEAVY OIL PRODUCTION
UTM 10S 734,027E 4,007,848N COALINGA
FRESNO COUNTY, CA 93210

EQUIPMENT DESCRIPTION:
MODIFICATION OF 2,000 FIXED ROOF CRUDE OIL STORAGE TANK (OR DISTRICT APPROVED EQUIVALENT), #13-13A SERVED BY SHARED VAPOR RECOVERY SYSTEM LISTED ON PERMIT UNIT C-311-267: ADD PROVISIONS FOR TANK TO BE DISCONNECTED FROM VAPOR CONTROL SYSTEM FOR UP TO 600 HOURS PER YEAR; REDUCE VOC CONTENT LIMIT OF VAPORS TO 10% BY WEIGHT

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. This Authority to Construct (ATC) cancels and supersedes ATCs C-311-267-3 and -264-2. [District Rule 2201]
4. This ATC shall be implemented concurrently with ATC C-311-267-3. [District Rule 2201]
5. The permittee shall obtain written District approval for the use of any equivalent equipment not specifically approved by this Authority to Construct. Approval of the equivalent equipment shall be made only after the District's determination that the submitted design and performance of the proposed alternate equipment is equivalent to the specifically authorized equipment. [District Rule 2201]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DRAFT

Arnaud Marjollet, Director of Permit Services

Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726 • (559) 230-5900 • Fax (559) 230-6061

6. The permittee's request for approval of equivalent equipment shall include the make, model, manufacturer's maximum rating, manufacturer's guaranteed emission rates, equipment drawing(s), and operational characteristics/parameters. [District Rule 2010]
7. Alternate equipment shall be of the same class and category of source as the equipment authorized by the Authority to Construct. [District Rule 2201]
8. No emission factor and no emission shall be greater for the alternate equipment than for the proposed equipment. No changes in the hours of operation, operating rate, throughput, or firing rate may be authorized for any alternate equipment. [District Rule 2201]
9. Tank shall only vent to vapor recovery system, permit C-311-267, except during District approved cleaning and during maintenance procedures. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
10. Tank shall not be required to be served by vapor control system C-311-267 during vapor recovery system (tanks to disposal devices, inclusive) maintenance/repairs/upset conditions for up to 600 hours per year. Approved breakdowns and relief periods granted by variance and supported by the District shall not be included in this limit. [District Rule 2201]
11. During temporary periods of maintenance/repair/upsets covered by this permit, operator shall use work practices to minimize VOC emissions including: constant level tank operation, use of operational P/V valve where possible, work completed expeditiously with pre-staging of equipment and material and pre-fabrication of parts, minimization of tank openings and liquid drainage from disconnects, inspection, monitoring, and repair if necessary of fugitive emissions components at job site within 30 days of completion of work. [District Rule 2201] Federally Enforceable Through Title V Permit
12. When disconnected from the vapor control system for maintenance/repairs/upset conditions, tank will store organic liquid with a true vapor pressure less than 0.5 psia. [District Rule 4623]
13. Maximum VOC content of vapor in the tank vapor space shall not exceed 10% by weight. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Operator shall conduct quarterly gas sampling of gas handled by TVR system. If gas samples are equal to or less than 10% VOC by weight for 8 consecutive quarterly samplings, sampling frequency shall only be required annually. [District Rule 2201] Federally Enforceable Through Title V Permit
15. VOC content of vapor by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945, D1946, EPA Method 18 referenced as methane, or equivalent test method with prior District approval. [District Rules 1081 and 2201] Federally Enforceable Through Title V Permit
16. A leak-free condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with EPA Method 21. [District Rule 4623, 3.11 and 3.17]
17. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2]
18. The operator shall determine the true vapor pressure of the petroleum liquid stored in the tank at least once per year in accordance with methods described in this permit and District Rule 4623. Determinations shall be made annually during the summer and whenever there is a change in the source or type of petroleum entering the tank. As used in this permit, the term "source or type of petroleum" shall mean petroleum liquids with similar characteristics. This determination is to be done so that proper inspection, maintenance and tank cleaning procedures can be made per District Rule 4623, Section 5.7, prior to storing liquids in any permitted tank with a TVP equal to or greater than 0.5 psia. Determination can be made using representative sampling of common sources in the first line tank (or tanks) in a tank battery that is first receiving the produced fluids (mixture of oil, water, and gases) from the crude oil production wells. [District Rules 2520, 9.3.2 and 4623, 5.7]
19. The TVP testing shall be conducted at actual storage temperature of the organic liquid in the tank. The permittee shall also conduct an API gravity testing. [District Rule 4623]

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

20. The API gravity of crude oil or petroleum distillate shall be determined by using ASTM Method D 287 e1 "Standard Test Method for API Gravity of Crude Petroleum and Petroleum Products (Hydrometer Method). Sampling for API gravity shall be performed in accordance with ASTM Method D 4057 "Standard Practices for Manual Sampling of Petroleum and Petroleum Products." [District Rule 4623, 6.4.2]

21. For crude oil with an API gravity greater than 26 degrees, the TVP of any organic liquid shall be determined by measuring the Reid Vapor Pressure (RVP) using ASTM D 323-94 (Test Method for Vapor Pressure for Petroleum Products), and converting the RVP to TVP at the tank's maximum organic liquid storage temperature. The conversion of RVP to TVP shall be done in accordance with the procedures in District Rule 4623, Appendix B. As an alternative to using ASTM D 323-94, the TVP of crude oil with an API gravity range of greater than 26 degrees up to 30 degrees may be determined by using other equivalent test methods approved by APCO, ARB and US EPA. [District Rule 4623, 6.4.3]

22. For crude oil with an API gravity of 26 degrees or less, the TVP shall be determined using the latest version of the Lawrence Berkeley National Laboratory "test Method for Vapor pressure of Reactive Organic Compounds in Heavy Crude Oil Using Gas Chromatograph", as approved by ARB and EPA. [District Rule 4623, 6.4.4]

23. When storing organic liquids of TVP equal to or greater than 0.5 psia, operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3]

24. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3]

25. When storing organic liquids of TVP equal to or greater than 0.5 psia, upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3]

26. When storing organic liquids of TVP equal to or greater than 0.5 psia, components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3]

27. When storing organic liquids of TVP equal to or greater than 0.5 psia, leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623, Table 3]

28. When storing organic liquids of TVP equal to or greater than 0.5 psia, if a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3]

29. When storing organic liquids of TVP equal to or greater than 0.5 psia, any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623, Table 3]

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

30. When storing organic liquids of TVP less than 0.5 psia, all piping, fittings, and valves shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the provisions of this permit. If any of the tank components are found to leak during an annual inspection, the inspection frequency for that component type shall be changed from annual to quarterly. If no tank components are subsequently found to be leaking during five consecutive inspections, the inspection frequency may be changed from quarterly to annual. Components located in inaccessible (over 15 feet above ground when access is required from the ground or over 6 feet away from a platform when access is required from the platform) locations shall be inspected at least annually and components located in unsafe areas shall be inspected and repaired at the next process unit turnaround (the scheduled shutdown of a unit for maintenance and repair work). [District Rule 2080]
31. When storing organic liquids of TVP less than 0.5 psia, a facility operator, upon detection of a leaking component, shall affix to that component a weatherproof readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until the leaking component is repaired, reinspected and found to be in a leak free condition. [District Rule 2080]
32. When storing organic liquids of TVP less than 0.5 psia, an operator shall reinspect a component for leaks within thirty working days after the date on which the component is repaired. [District Rule 2080]
33. When storing organic liquids of TVP less than 0.5 psia, emissions from components which have been tagged by the facility operator for repair within 15 calendar days or which have been repaired and are awaiting re-inspection shall not be in violation of this permit. [District Rule 2080]
34. When storing organic liquids of TVP less than 0.5 psia, any component leak shall be repaired to a leak-free condition or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 18 or 25 within fifteen (15) calendar days of detection. The APCO may grant a ten (10) calendar day extension provided the operator demonstrates that necessary and sufficient actions are being taken to correct the leak within this time period. Any vapor control device, other than a flare, used to comply with this condition shall demonstrate at least 95% control efficiency as measured by EPA Method 18 or 25 at least annually. [District Rule 2080]
35. When storing organic liquids of TVP less than 0.5 psia, if the leaking component is an essential part of a critical process unit which cannot be immediately shut down for repairs, the operator shall 1) Minimize the leak within 15 calendar days; and 2) If the leak which has been minimized still exceeds the concentration allowed by this permit, the essential component shall be repaired to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection. A critical process unit is any process unit which would result in the automatic shutdown of other process units if it were shut down. [District Rule 2080]
36. {983} The requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
37. {984} The requirements of SJVUAPCD Rule 4661 (Amended December 17, 1992) and Rule 4801 (Amended December 17, 1992) do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
38. Permittee shall maintain records of the number and type of components installed, % VOC content of gas handled, and the calculated fugitive emissions. Permittee shall update such records when new components are installed or removed. [District Rule 2201]
39. An operator whose tanks are subject to the requirements of District Rule 4623, shall keep an accurate record of each organic liquid stored in each tank, including its storage temperature, Reid/TVP as appropriate and API gravity of petroleum liquids stored in this unit to determine which oils are from the Heavy Oil source. [District Rule 4623, 6.3.1]
40. When storing organic liquids of TVP equal to or greater than 0.5, operator shall maintain an inspection log containing the following: 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rules 1070 and 4623]

DRAFT

CONDITIONS CONTINUE ON NEXT PAGE

41. When storing organic liquids of TVP less than 0.5 psia, operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date of leak detection, and method of detection; 3) Date and emission level of recheck after leak is repaired; 4) Identification and location of essential parts of critical process units found leaking that cannot be repaired until the next process unit turnaround; and 5) Method used to minimize the leak from essential parts of critical process units which cannot be repaired until the next process unit turnaround. [District Rule 2080]

42. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rules 2520, 9.4.2 and 4623, 6.3]

DRAFT