



DEC 29 2016

John Ludwick
Aera Energy, LLC
PO Box 11164
Bakersfield, CA 93389-1164

RE: Notice of Final Action - Authority to Construct
Facility Number: S-1547
Project Number: S-1160356

Dear Mr. Ludwick:

The Air Pollution Control Officer has issued the Authority to Construct permits to Aera Energy, LLC for modifications to two steam generators, in western Kern County. Enclosed are the Authority to Construct permits and a copy of the notice of final action to be published approximately three days from the date of this letter.

Notice of the District's preliminary decision to issue the Authority to Construct permits was published on 11/1/16. The District's analysis of the proposal was also sent to CARB and US EPA Region IX on 10/27/16. No comments were received following the District's preliminary decision on this project.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Leonard Scandura at (661) 392-5500.

Sincerely,



Arnaud Marjollet
Director of Permit Services

AM:dbt

Enclosures

cc: Tung Le, CARB (w/enclosure) via email
cc: Gerardo C. Rios, EPA (w/enclosure) via email

Sayed Sadredin

Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT


HEALTHY AIR LIVING™

Facility # S-1547
AERA ENERGY LLC
PO BOX 11164
BAKERSFIELD, CA 93389-1164

AUTHORITY TO CONSTRUCT (ATC)

QUICK START GUIDE

1. **Pay Invoice:** Please pay enclosed invoice before due date.
2. **Modify Your Title V Permit.** Prior to operating the equipment authorized under this ATC, submit an application to modify your Title V permit. See application forms at <http://www.valleyair.org/busind/pto/ptoforms/1ptoformidx.htm>.
3. **Fully Understand ATC:** Make sure you understand ALL conditions in the ATC prior to construction, modification and/or operation.
4. **Follow ATC:** You must construct, modify and/or operate your equipment as specified on the ATC. Any unspecified changes may require a new ATC.
5. **Notify District:** You must notify the District's Compliance Department, at the telephone numbers below, upon start-up and/or operation under the ATC. Please record the date construction or modification commenced and the date the equipment began operation under the ATC. You may NOT operate your equipment until you have notified the District's Compliance Department. A startup inspection may be required prior to receiving your Permit to Operate.
6. **Source Test:** Schedule and perform any required source testing. See http://www.valleyair.org/busind/comply/source_testing.htm for source testing resources.
7. **Maintain Records:** Maintain all records required by ATC. Records are reviewed during every inspection (or upon request) and must be retained for at least 5 years. Sample record keeping forms can be found at http://www.valleyair.org/busind/comply/compliance_forms.htm.

By operating in compliance, you are doing your part to improve air quality for all Valley residents.

**For assistance, please contact District Compliance staff at
any of the telephone numbers listed below.**

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95368-8718
Tel: (209) 557-6400 FAX: (209) 557-8475

Central Region (Main Office)
1890 E. Gettysburg Avenue
Fresno, CA 93728-0244
Tel: (559) 230-8000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 881-382-5500 FAX: 881-382-5585



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT


HEALTHY AIR LIVING™

AUTHORITY TO CONSTRUCT

PERMIT NO: S-1547-359-31

ISSUANCE DATE: 12/13/2016

LEGAL OWNER OR OPERATOR: AERA ENERGY LLC
MAILING ADDRESS: PO BOX 11164
BAKERSFIELD, CA 93389-1164

LOCATION: HEAVY OIL WESTERN STATIONARY SOURCE
KERN COUNTY, CA

SECTION: 33 **TOWNSHIP:** 28S **RANGE:** 21E

EQUIPMENT DESCRIPTION:

MODIFICATION OF VAPOR COLLECTION AND CONTROL SYSTEM SERVING 1657 THERMALLY ENHANCED WELLS IN SECTIONS 1, 2, 3, 4, 10, 11, 12 OF T29S, R21E, SECTIONS 33, 34, 35 OF T28S, R21E: ADD VAPOR PIPING TO STEAM GENERATORS S-1547-729 & '734 AND INCLUDE '729 AND '734 IN THIS PERMIT'S SULFUR/SOX SPECIFIC LIMITING CONDITION (SLC) PLAN

CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Vapor collection and control system can receive vapors from tank vapor control system S-1547-888, TEOR system S-1547-1079, free water knockout vessel S-1547-1104, and degassing operation S-1547-1141. [District Rule 2201] Federally Enforceable Through Title V Permit
4. Vapor collection system shall include 2 sulfur scrubbing systems using District approved scrubbing agents. Scrubber(s) may be by-passed only when incinerating vapors in scrubbed steam generator S-1547-47 or when routing gas directly to Sec. 32 Belridge gas plant (S-1543-4). [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050; this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO


Arnaud Marjollet, Director of Permit Services
S-1547-359-31 Dec 14 2016 11:45AM -- TORID Joint Inspection NOT Required

5. Scrubbed gases shall be incinerated in steam generators S-1547-726, '-729, '-733 through '-738, '-742 through '-749, '-760, '-761, '-762, '-803, '-834, '-835, and '-837 or shall be routed to the Sec. 32 Belridge gas plant (S-1543-4). Alternatively, the wells can be operated with the casing vents closed. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Scrubbed or unscrubbed vapor may be routed to the Sec. 32 Belridge gas plant (S-1543-4) via the Del Sur gas gathering system (compressors S-1578-433, '-434, '-435 and emergency flare S-1548-134). [District Rule 2201] Federally Enforceable Through Title V Permit
7. Vapor collection system shall be equipped with heat exchangers, gas/liquid separators with vane-type mist eliminators, gas compressors, compressor discharge knock-outs, and liquid pumps. [District Rule 2201] Federally Enforceable Through Title V Permit
8. All produced fluids from any well served by vapor collection system which has had the casing vent closed shall be handled only in closed production equipment served by a 99% effective vapor control system. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Water/VOCs condensate from all liquid knockout drums shall be pumped to production manifold, recycled to production wells for disposal, or pumped to vapor controlled storage tanks. [District Rule 2201] Federally Enforceable Through Title V Permit
10. The regeneration vessel air vent at each sulfur scrubbing system may be vented to atmosphere provided daily emissions from each vent shall not exceed 2.0 lbs VOC/day. [District Rule 2201] Federally Enforceable Through Title V Permit
11. Permittee shall determine VOC content of the exhaust at each regeneration vessel air vent semi-annually. If a semi-annual VOC content analysis fails to show compliance, the regeneration vessel air vents shall be tested once per week. If compliance with the VOC content limit has been demonstrated for eight consecutive weeks, then the VOC content testing frequency shall revert to semi-annually. Gas analysis shall be performed using ASTM D-3588. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Total mass flowrate of sulfur compounds in gas leaving sulfur removal systems shall not exceed 336.92 lb/day as sulfur. [District Rule 2201] Federally Enforceable Through Title V Permit
13. Emissions of Volatile Organic Compounds (VOC) shall not exceed 1,888.1 lb/day (including regeneration vessel air vents). [District Rule 2201] Federally Enforceable Through Title V Permit
14. Permittee shall maintain accurate records of sulfur content and daily vapor flow rate of all uncondensed vapors sent to approved incineration devices(S-1547-726, '-729, '-733 through '-738, '-742 through '-749, '-760, '-761, '-762, '-803, '-834, '-835, and '-837) for disposal. Such records shall be maintained readily available for District inspection upon request for a period of five years. [District Rule 2201] Federally Enforceable Through Title V Permit
15. Permittee shall maintain with the permit a listing (updated each calendar year) of all steam-enhanced wells connected to the casing vent control system and such listing shall be made available for District inspection upon request. [District Rule 2201] Federally Enforceable Through Title V Permit
16. The requirements of SJVUAPCD Rule 4407 (Adopted May 19, 1994) do not apply to this permit unit. A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
17. During the time any steam-enhanced crude oil production well is undergoing service or repair while the well is not producing, it shall be exempt from the emission control requirements of District Rule 4401. [District Rule 4401, 4.1] Federally Enforceable Through Title V Permit
18. The inspection requirements of Section 5.4.1 through Section 5.4.7 of Rule 4401 shall not apply to components exclusively handling gas/vapor or liquid with a VOC content of ten percent by weight (10%) or less, as determined by the test methods in Section 6.3.4 of Rule 4401. [District Rule 4401, 4.7] Federally Enforceable Through Title V Permit
19. Gas and liquid leaks are as defined in Section 3.20 of Rule 4401. [District Rule 4401, 3.20] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

20. An operator shall be in violation of this rule if any District inspection demonstrates or if any operator inspection conducted pursuant to Section 5.4 of Rule 4401 demonstrates the existence of any combination of components with minor liquid leaks, minor gas leaks, or a gas leaks greater than 10,000 ppmv up to 50,000 ppmv that totals more than number of leaks allowed by Table 2 of Rule 4401. [District Rule 4401, 5.2.2] Federally Enforceable Through Title V Permit
21. An operator shall not use any component with a leak as defined in Section 3.0 of Rule 4401, or that is found to be in violation of the provisions of Section 5.2.2 of Rule 4401. However, components that were found leaking may be used provided such leaking components have been identified with a tag for repair, are repaired, or awaiting re-inspection after being repaired within the applicable time frame specified in Section 5.5 of Rule 4401. [District Rule 4401, 5.3.1] Federally Enforceable Through Title V Permit
22. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4401, 5.3.2] Federally Enforceable Through Title V Permit
23. An operator shall comply with the requirements of Section 6.7 of Rule 4401 if there is any change in the description of major components or critical components. [District Rule 4401, 5.3.3] Federally Enforceable Through Title V Permit
24. Except for pipes and unsafe-to-monitor components, an operator shall inspect all other components pursuant to the requirements of Section 6.3.3 of Rule 4401 at least once every year. [District Rule 4401, 5.4.1] Federally Enforceable Through Title V Permit
25. An operator shall visually inspect all pipes at least once every year. Any visual inspection of pipes that indicates a leak that cannot be immediately repaired to meet the leak standards of this rule shall be inspected within 24 hours after detecting the leak. If a leak is found, the leak shall be repaired as soon as practicable but not later than the time frame specified in Table 3 of Rule 4401. [District Rule 4401, 5.4.2] Federally Enforceable Through Title V Permit
26. In addition to the inspections required by Section 5.4.1 of Rule 4401, an operator shall inspect for leaks all accessible operating pumps, compressors, and PRDs in service as follows: An operator shall audio-visually (by hearing and by sight) inspect for leaks all accessible operating pumps, compressors, and PRDs in service at least once each calendar week. Any audio-visual inspection of an accessible operating pump, compressor, and PRD performed by an operator that indicates a leak that cannot be immediately repaired to meet the leak standards of this rule shall be inspected not later than 24 hours after conducting the audio-visual inspection. If a leak is found, the leak shall be repaired as soon as practicable but not later than the time frame specified in Table 3 of Rule 4401. [District Rule 4401, 5.4.3] Federally Enforceable Through Title V Permit
27. In addition to the inspections required by Sections 5.4.1, 5.4.2 and 5.4.3 of Rule 4401, operator shall perform the following: initially inspect a PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the discovery of the release, re-inspect the PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the initial inspection, inspect all new, replaced, or repaired fittings, flanges, and threaded connections within 72 hours of placing the component in service. Except for PRDs subject to the requirements of Section 5.4.4.1 of Rule 4401, an operator shall inspect a component that has been repaired or replaced not later than 15 calendar days after the component was repaired or replaced. [District Rule 4401, 5.4.4] Federally Enforceable Through Title V Permit
28. An operator shall inspect all unsafe-to-monitor components during each turnaround. [District Rule 4401, 5.4.7] Federally Enforceable Through Title V Permit
29. District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. [District Rule 4401, 5.4.8] Federally Enforceable Through Title V Permit
30. An operator shall affix a readily visible weatherproof tag to a leaking component upon detection of the leak and shall include the following information on the tag: date and time of leak detection, date and time of leak measurement, for a gaseous leak, the leak concentration in ppmv, for a liquid leak, whether it is a major liquid leak or a minor liquid leak, whether the component is an essential component, an unsafe-to monitor component, or a critical component. [District Rule 4401, 5.5.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

31. An operator shall keep the tag affixed to the component until an operator has met all of the following conditions: repaired or replaced the leaking component, re-inspected the component using the test method in Section 6.3.3, and the component is found to be in compliance with the requirements of this rule. [District Rule 4401 5.5.2] Federally Enforceable Through Title V Permit
32. An operator shall minimize a component leak in order to stop or reduce leakage to the atmosphere immediately to the extent possible, but not later than one (1) hour after detection of the leak. [District Rule 4401, 5.5.3] Federally Enforceable Through Title V Permit
33. Except for leaking critical components or leaking essential components subject to the requirements of Section 5.5.7 of Rule 4401, if an operator has minimized a leak but the leak still exceeds the applicable leak limits as defined in Section 3.0 of Rule 4401, an operator shall comply with at least one of the following requirements as soon as practicable but not later than the time period specified in Table 3 of Rule 4401: Repair or replace the leaking component; or vent the leaking component to a VOC collection and control system as defined in Section 3.0 of Rule 4401, or remove the leaking component from operation. [District Rule 4401, 5.5.4] Federally Enforceable Through Title V Permit
34. The repair period in calendar days shall not exceed 14 days for minor gas leaks, 5 days for major gas leaks less than or equal to 50,000 ppmv, 2 days for gas leak greater than 50,000 ppmv, 3 days for minor liquid leaks, 2 days for major liquid leaks. [District Rule 4401, 5.5.4] Federally Enforceable Through Title V Permit
35. The leak rate measured after leak minimization has been performed shall be the leak rate used to determine the applicable repair period specified in Table 3 of Rule 4401. [District Rule 4401, 5.5.5] Federally Enforceable Through Title V Permit
36. The time of the initial leak detection shall be the start of the repair period specified in Table 3 of Rule 4401. [District Rule 4401, 5.5.6] Federally Enforceable Through Title V Permit
37. If the leaking component is an essential component or a critical component that cannot be immediately shut down for repairs, and if the leak has been minimized but the leak still exceeds the applicable leak standard of this rule, the operator shall repair or replace the essential component or critical component to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4401, 5.5.7] Federally Enforceable Through Title V Permit
38. The operator of any steam-enhanced crude oil production well shall maintain records of the date and well identification where steam injection or well stimulation occurs. [District Rule 4401, 6.1.1] Federally Enforceable Through Title V Permit
39. An operator of any steam-enhanced crude oil production well shall keep source test records which demonstrate compliance with the control efficiency requirements of the VOC collection and control system as defined in Section 3.0 of Rule 4401. [District Rule 4401, 6.1.3] Federally Enforceable Through Title V Permit
40. Operator of any steam-enhanced crude oil production well shall keep an inspection log maintained pursuant to Section 6.4 of Rule 4401. [District Rule 4401, 6.1.4] Federally Enforceable Through Title V Permit
41. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, instrument reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration shall be maintained. [District Rule 4401, 6.1.5] Federally Enforceable Through Title V Permit
42. An operator shall maintain copies at the facility of the training records of the training program operated pursuant to Section 6.5 of Rule 4401. [District Rule 4401, 6.1.6] Federally Enforceable Through Title V Permit
43. Operator shall keep a copy of the APCO-approved Operator Management Plan at the facility. [District Rule 4401, 6.1.7] Federally Enforceable Through Title V Permit
44. Operator shall keep a list of all gauge tanks, as defined in Section 3.0 of Rule 4401. The list shall contain the size, identification number, the location of each gauge tank and specify whether the gauge tank is upstream of all front line production equipment. [District Rule 4401, 6.1.8] Federally Enforceable Through Title V Permit
45. The results of gauge tank TVP testing conducted pursuant to Section 6.2.3 shall be submitted to the APCO within 60 days after the completion of the testing. [District Rule 4401, 6.1.9] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

46. An operator that discovers that a PRD has released shall record the date that the release was discovered, and the identity and location of the PRD that released. An operator shall submit such information recorded during the calendar year to the APCO no later than 60 days after the end of the calendar year. [District Rule 4401, 6.1.10] Federally Enforceable Through Title V Permit
47. An operator shall source test annually all vapor collection and control systems used to control emissions from steam-enhanced crude oil production well vents to determine the control efficiency of the device(s) used for destruction or removal of VOC. Compliance testing shall be performed annually by source testers certified by ARB. Testing shall be performed during June, July, August, or September of each year if the system's control efficiency is dependent upon ambient air temperature. A process system as defined in Section 3.30 of Rule 4401 is not subject to compliance source testing requirements. [District Rule 4401, 6.2.1] Federally Enforceable Through Title V Permit
48. If approved by EPA, ARB, and the APCO, an operator need not comply with the annual testing requirement of Section 6.2.1 if all uncondensed VOC emissions collected by a vapor collection are controlled by an internal combustion engine subject to Rule 4702, a combustion device subject to Rule 4320, 4307 or 4308, a flare subject to Rule 4311. [District Rule 4401, 6.2.2] Federally Enforceable Through Title V Permit
49. An operator shall comply with the following requirements for each gauge tank, as defined in Section 3.0 of Rule 4401: Conduct periodic TVP testing of each gauge tank at least once every 24 months during summer (July - September), and whenever there is a change in the source or type of produced fluid in the gauge tank. The TVP testing shall be conducted at the actual storage temperature of the produced fluid in the gauge tank using the applicable TVP test method specified in Section 6.4 of Rule 4623 (Storage of Organic Liquids). The operator shall submit the TVP testing results to the APCO as specified in Section 6.1.9 of Rule 4401. [District Rule 4401, 6.2.3] Federally Enforceable Through Title V Permit
50. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case EPA Method 25a may be used. EPA Method 18 may be used in lieu of EPA Method 25 or EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4401, 6.3.1] Federally Enforceable Through Title V Permit
51. VOC content shall be analyzed by using the latest revision of ASTM Method E168, E169, or E260 as applicable. Analysis of halogenated exempt compounds shall be performed by using ARB Method 432. [District Rule 4401, 6.3.2] Federally Enforceable Through Title V Permit
52. Leak inspection, other than audio-visual, and measurements of gaseous leak concentrations shall be conducted according to EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. Where safety is a concern, such as measuring leaks from compressor seals or pump seals when the shaft is rotating, a person shall measure leaks by placing the instrument probe inlet at a distance of one (1) centimeter or less from the surface of the component interface. [District Rule 4401, 6.3.3] Federally Enforceable Through Title V Permit
53. The VOC content by weight percent (wt.%) shall be determined using American Society of Testing and Materials (ASTM) D1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304-91 or the latest revision of ASTM Method E168, E169 or E260 for liquids. [District Rule 4401, 6.3.4] Federally Enforceable Through Title V Permit

54. Operator shall maintain an inspection log in which an operator records, at a minimum, all of the following information for each inspection performed: The total number of components inspected, total number and percentage of leaking components found by component type, location, type, and name or description of each leaking component and description of any unit where the leaking component is found, date of leak detection and the method of leak detection. For gaseous leaks, the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, the date of repair, replacement, or removal from operation of leaking components, identify and location of essential components and critical components found leaking that cannot be repaired until the next process unit turnaround or not later than one year after leak detection, whichever comes earlier, methods used to minimize the leak from essential components and critical components found leaking that cannot be repaired until the next process unit turnaround or not later than one year after leak detection, whichever comes earlier, the date of re-inspection and the leak concentration in ppmv after the component is repaired or is replaced, the inspector's name, business mailing address, and business telephone number, date and signature of the facility operator responsible for the inspection and repair program certifying the accuracy of the information recorded in the log. [District Rule 4401, 6.4] Federally Enforceable Through Title V Permit
55. All records shall be maintained and made readily available for District inspection upon request for a period of five years. [District Rules 1070 and 2201] Federally Enforceable Through Title V Permit



AUTHORITY TO CONSTRUCT

PERMIT NO: S 1547 729 20

ISSUANCE DATE: 12/13/2016

LEGAL OWNER OR OPERATOR: AERA ENERGY LLC
MAILING ADDRESS: PO BOX 11164
BAKERSFIELD, CA 93389-1164

LOCATION: HEAVY OIL WESTERN STATIONARY SOURCE
KERN COUNTY, CA

SECTION: NE03 **TOWNSHIP:** 29S **RANGE:** 21E

EQUIPMENT DESCRIPTION:

MODIFICATION OF DORMANT 62.5 MMBTU/HR STRUTHERS GAS FIRED STEAM GENERATOR, WITH A COEN MODEL ULN LOW-NOX BURNER, FLUE GAS RECIRCULATION AND OXYGEN ANALYZER/CONTROLLER. (#3-2K, DIS #5406-74) (BELRIDGE): CHANGE STATUS TO COMPLIANT DORMANT, REPLACE BURNER (IF NEEDED) WITH A COEN ULN (OR EQUIVALENT) TO MEET 15 PPM-NOX, ADD FEE PAY OPTION FOR RULE 4320 COMPLIANCE, ADD VAPOR PIPING TO TEOR S-1547-359 AND INCLUDE IN '359'S SULFUR/SOX SLC PLAN

CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Prior to operating equipment under this Authority to Construct, permittee shall surrender NOX emission reduction credits for the following quantity of emissions: 1st quarter - 2,409 lb, 2nd quarter - 2,409 lb, 3rd quarter - 2,409 lb, and fourth quarter - 2,409 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 2/18/16) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Sayed Sadredin, Executive Director / APCO



Arnaud Marjollet, Director of Permit Services

8-1547-729-20 : Dec 14 2016 11:45AM - TORID Joint Inspection NOT Required

4. ERC Certificate Number S-4284-2 (or a certificate split from this certificate) shall be used to supply the required offsets, unless a revised offsetting proposal is received and approved by the District, upon which this Authority to Construct shall be reissued, administratively specifying the new offsetting proposal. Original public noticing requirements, if any, shall be duplicated prior to reissuance of this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The permittee shall obtain written District approval for the use of any equivalent equipment not specifically approved by this Authority to Construct. Approval of the equivalent equipment shall be made only after the District's determination that the submitted design and performance of the proposed alternate equipment is equivalent to the specifically authorized equipment. [District Rule 2201] Federally Enforceable Through Title V Permit
6. The permittee's request for approval of equivalent equipment shall include the make, model, manufacturer's maximum rating, manufacturer's guaranteed emission rates, equipment drawing(s), and operational characteristics/parameters. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Alternate equipment shall be of the same class and category of source as the equipment authorized by the Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
8. No emission factor and no emission shall be greater for the alternate equipment than for the proposed equipment. No changes in the hours of operation, operating rate, throughput, or firing rate may be authorized for any alternate equipment. [District Rule 2201] Federally Enforceable Through Title V Permit
9. This unit may be designated as a dormant emissions unit or an active emissions unit. The permittee shall notify the District's Compliance Division by US mail, email or Fax upon redesignating the unit. [District Rule 1070]
10. When designated as a dormant emissions unit the fuel supply line shall be physically disconnected from the emissions unit. [District Rules 4305 and 4306]
11. When designated as a dormant emissions unit, the permittee shall not be required to perform source testing or monitoring requirements otherwise required by this permit. [District Rules 4305 and 4306]
12. A source test to demonstrate compliance with the NO_x and CO emission limits shall be performed within 60 days of recommencing operation of the dormant emissions unit. [District Rules 4305 and 4306]
13. All required source testing shall conform to the compliance testing procedures described in District Rule 1081 (Last Amended December 16, 1993). [District Rule 1081, and County Rules 108 (Kings), 108.1 (Fresno, Merced, San Joaquin, Tulare, Kern, and Stanislaus), and 110 (Madera)] Federally Enforceable Through Title V Permit
14. Copies of all fuel invoices showing quantity and delivery points of gas delivered and copies of quality terms of gas delivery contracts shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel and record specific type of noncertified fuel used. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
15. Vapor received from TEOR S-1547-359 shall be scrubbed of 95% its sulfur or shall limit exhaust SO₂ to less than or equal to 9 ppmv corrected to 3.0% oxygen. [District Rules 2201 and 4320] Federally Enforceable Through Title V Permit
16. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of fuel combusted in the unit shall be installed, utilized and maintained. [District Rule 2201 and 40 CFR 60.48c (g)] Federally Enforceable Through Title V Permit
17. The exhaust stack shall vent vertically upward. The vertical exhaust flow shall not be impeded by a rain cap (flapper ok), roof overhang, or any other obstruction. [District Rule 4102]
18. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.5.2] Federally Enforceable Through Title V Permit
19. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit has been demonstrated for 8 consecutive weeks for a fuel source, then the testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rules 2520, 9.4.2 and 4320] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

20. When complying with SOx emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6; or EPA Method 6B; or EPA Method 8; or ARB Methods 8 or 100; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by double GC for H2S and mercaptans performed in the laboratory and EPA Method 19 to calculate emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rules 2520, 9.4.2 and 4320] Federally Enforceable Through Title V Permit
21. If the unit is fired on noncertified gaseous fuel and compliance with SOx emission limits is achieved through fuel sulfur content limitations, the following test methods (or other approved methods listed in this permit) shall be used; H2S: ASTM D6228 or grab sample analysis by double GC for H2S and mercaptans performed in the laboratory; total sulfur: ASTM 1072, D3246, D4084 or D6228; and methane content: ASTM D1945. [District Rules 2520, 9.3.2 and 4320] Federally Enforceable Through Title V Permit
22. If fuel analysis is used to demonstrate compliance with conditions of this permit, the fuel higher heating value for each fuel shall be certified by a third party fuel supplier or determined by ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.4.2; 4305, 6.2.1; 4306, 6.2.1; 4320, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
23. Compliance with permit conditions in the Title V permit shall be deemed compliance with the requirements of County Rules 108 (Kings), 108.1 (Fresno, Merced, San Joaquin, Tulare, Kern, and Stanislaus), 110 (Madera) 402 (Madera), 404 (Fresno, Kern, Tulare, Kings, Stanislaus, Merced, and San Joaquin), 405 (Madera), 408 (Fresno, Kern, Tulare, Kings, Stanislaus, Merced, and San Joaquin), 407.2 (Kern, Tulare, Kings, Stanislaus, and San Joaquin), and 408.2 (Merced). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
24. Compliance with permit conditions in the Title V permit shall be deemed compliance with the following requirements of SJVUAPCD Rules 4201 (Amended December 17, 1992), 4301 (Amended December 17, 1992), 4406 (Amended December 17, 1992, and Rule 4801 (Amended December 17, 1992). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
25. Compliance with permit conditions in the Title V permit shall be deemed compliance with the requirements of 40 CFR 60, Subpart Dc (except 60.44c(g) and (h) and 60.48c). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
26. This unit has not been used to produce electricity for sale in 1985 or on or after November 15, 1990. Therefore, the requirements of 40 CFR 72.6(b) do not apply to this source. A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
27. Steam generator shall be operated at no greater than 1,466.7 MMBtu hhv/day heat input. [District Rule 2201] Federally Enforceable Through Title V Permit
28. Only natural gas or a combination of natural gas and scrubbed non-condensable gas from sulfur scrubbing system(s) S-1547-359 shall be used as fuel in this steam generator. [District Rule 2201] Federally Enforceable Through Title V Permit
29. The total fuel burned in this unit shall be less than 50% by volume PUC quality natural gas determined on a calendar month basis. PUC quality natural gas is any gaseous fuel where the sulfur content is no more than one-fourth (0.25) grain of hydrogen sulfide per one hundred (100) standard cubic feet, no more than five (5) grains of total sulfur per one hundred (100) standard cubic feet, and at least 80% methane by volume. [District Rule 4320] Federally Enforceable Through Title V Permit
30. Permittee shall maintain records of daily quantity, higher heating value and sulfur content of natural gas burned in this steam generator. [District Rule 2201] Federally Enforceable Through Title V Permit
31. When fired exclusively on natural gas, emissions from this unit shall not exceed 0.002 lb-SOx/MMBtu (as SO2) [District Rules 2201, 2520, 4201, 4301, 4406, 4801] Federally Enforceable Through Title V Permit
32. Emissions from this unit shall not exceed 0.005 lb-PM10/MMBtu. [District Rules 2201, 4201, and 4301] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

33. Emission rates, except during startup, shutdown, and refractory curing shall not exceed any of the following: VOC: 0.003 lb/MMBtu, NOx (as NO₂): 0.018 lb/MMBtu or 15 ppmv @ 3% O₂, or CO: 0.030 lb/MMBtu or 40 ppmv @ 3% O₂. [District Rules 2201, 2520, 4301, 4305, 4306, 4405, and Kern County Rule 425] Federally Enforceable Through Title V Permit
34. Emission rates during startup, shutdown and refractory curing shall not exceed: particulate matter - 10 pounds per hour, or 0.1 grains/dscf calculated to 12% CO₂; sulfur - 200 pounds of SO₂ per hour, or 2000 ppmv as SO₂, or 0.11 pounds sulfur (as S) per MMBtu on average-wide basis for all units in Rule 4406 plan; NO₂ - 140 pounds per hour or 0.14 pounds per MMBtu. [District Rules 4101, 4102, 4301, 4405, 4406, 4801 and Kern County Rules 424 and 425] Federally Enforceable Through Title V Permit
35. Emission rates shall not exceed any of the following: PM₁₀: 7.3 lb/day, VOC: 4.4 lb/day, NOx (as NO₂): 52.8 lb/day or 9636 lb/year, or CO: 44.0 lb/day [District Rule 2201] Federally Enforceable Through Title V Permit
36. Duration of startup and shutdown (as defined in Rule 4320) shall not exceed 2 hours each per occurrence. Refractory curing period is defined as a maintenance-based reduced-load period of time during which a unit is brought from a shutdown status to staged rates of firing for the sole purpose of curing new refractory lining of the unit, and shall not exceed 30 hours per occurrence. The operator shall maintain records of the duration of start-up, shutdown, and refractory curing periods. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
37. The permittee shall monitor and record the stack concentration of NOx, CO, and O₂ at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305, 5.4.2; 4306, 5.4.2; and 4320, 5.7.1] Federally Enforceable Through Title V Permit
38. If either the NOx or CO concentrations corrected to 3% O₂, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100 (amended December 17, 1992), the permittee may fully comply with Rule 1100 in lieu of the performing the notification and testing required by this condition. [District Rules 4305, 5.4.2; 4306, 5.4.2; and 4320, 5.7.1] Federally Enforceable Through Title V Permit
39. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the permit-to-operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
40. The permittee shall maintain records of: (1) the date and time of NOx, CO, and O₂ measurements, (2) the O₂ concentration in percent and the measured NOx and CO concentrations corrected to 3% O₂, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 4305, 5.4.2; 4306, 5.4.2; and 4320, 5.7.1] Federally Enforceable Through Title V Permit
41. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. Unless otherwise specified in the Permit to Operate no determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4320. For the purposes of permittee-performed alternate monitoring, emissions measurements may be performed at any time after the unit reaches conditions representative of normal operation. [District Rules 4305, 5.5.2, 4306, 5.5.2, and 4320, 5.8.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

42. Compliance with fuel sulfur limit(s) can be demonstrated either by monitoring sulfur content at location(s) after all fuel sources are combined prior to incineration, or by monitoring the sulfur content and volume of each fuel source and performing mass balance calculations. Records of monitoring locations, detected sulfur concentrations, and mass balance calculations, if necessary, shall be maintained and kept onsite and made readily available for District inspection upon request. [District Rule 4320] Federally Enforceable Through Title V Permit
43. Source testing to measure natural gas-combustion NOx and CO emissions from this unit shall be conducted within 60 days of initial startup and at least once every twelve (12) months (no more than 30 days before or after the required annual source test date). After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months (no more than 30 days before or after the required 36-month source test date). If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 2201, 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
44. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
45. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
46. The following test methods shall be used: NOx (ppmv) - EPA Method 7E or ARB Method 100, NOx (lb/MMBtu) - EPA Method 19, CO (ppmv) - EPA Method 10 or 10B or ARB Method 100, stack gas oxygen - EPA Method 3 or 3A or ARB Method 100, SOx (lb/MMBtu) - ARB Method 8 or 100 or EPA Method 6, 6B or 8 or fuel gas sulfur content analysis and EPA Method 19, fuel gas sulfur content - ASTM D1072, D4468, D3246, D3246, D4084 or double GC for H2S and mercaptans performed in laboratory, fuel gas hhv - ASTM D1826 or D1945 in conjunction with ASTM D3588. [District Rule 1081, 4305, 6.2, 4306, and 4320] Federally Enforceable Through Title V Permit
47. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
48. All records shall be maintained for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 2201, 1070, 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
49. NOTE: There are no sulfur compounds daily emission limits (DELs) expressed on this permit for incineration of TEOR gas, sulfur compounds emissions are limited by DELs on permit S-1547-359.
50. Formerly S-1511-58
51. Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NOx emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NOx emission limit listed in Rule 4320. [District Rule 4320] Federally Enforceable Through Title V Permit
52. Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320] Federally Enforceable Through Title V Permit



AUTHORITY TO CONSTRUCT

PERMIT NO: S-1547-734-21

ISSUANCE DATE: 12/13/2016

LEGAL OWNER OR OPERATOR: AERA ENERGY LLC
MAILING ADDRESS: PO BOX 11164
BAKERSFIELD, CA 93389-1164

LOCATION: HEAVY OIL WESTERN STATIONARY SOURCE
KERN COUNTY, CA

SECTION: NE03 **TOWNSHIP:** 29S **RANGE:** 21E

EQUIPMENT DESCRIPTION:

MODIFICATION OF 62.5 MMBTU/HR C.E. NATCO GAS-FIRED STEAM GENERATOR, WITH A COEN QLN-ULN LOW-NOX BURNER, FLUE GAS RECIRCULATION AND OXYGEN ANALYZER/CONTROLLER. (#3-2L) (BELRIDGE): CHANGE STATUS TO COMPLIANT DORMANT, REPLACE BURNER (IF NEEDED) WITH A COEN ULN (OR EQUIVALENT) TO MEET 15 PPM-NOX, ADD FEE PAY OPTION FOR RULE 4320 COMPLIANCE, ADD VAPOR PIPING TO TEOR S-1547-359 AND INCLUDE IN '359'S SULFUR/SOX SLC PLAN

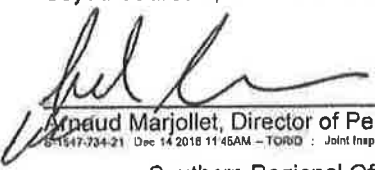
CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Prior to operating equipment under this Authority to Construct, permittee shall surrender NOX emission reduction credits for the following quantity of emissions: 1st quarter - 2,409 lb, 2nd quarter - 2,409 lb, 3rd quarter - 2,409 lb, and fourth quarter - 2,409 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 2/18/16) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST** NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Sayed Sadredin, Executive Director / APCO


Arnaud Marjollet, Director of Permit Services

4. ERC Certificate Number S-4284-2 (or a certificate split from this certificate) shall be used to supply the required offsets, unless a revised offsetting proposal is received and approved by the District, upon which this Authority to Construct shall be reissued, administratively specifying the new offsetting proposal. Original public noticing requirements, if any, shall be duplicated prior to reissuance of this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The permittee shall obtain written District approval for the use of any equivalent equipment not specifically approved by this Authority to Construct. Approval of the equivalent equipment shall be made only after the District's determination that the submitted design and performance of the proposed alternate equipment is equivalent to the specifically authorized equipment. [District Rule 2201] Federally Enforceable Through Title V Permit
6. The permittee's request for approval of equivalent equipment shall include the make, model, manufacturer's maximum rating, manufacturer's guaranteed emission rates, equipment drawing(s), and operational characteristics/parameters. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Alternate equipment shall be of the same class and category of source as the equipment authorized by the Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
8. No emission factor and no emission shall be greater for the alternate equipment than for the proposed equipment. No changes in the hours of operation, operating rate, throughput, or firing rate may be authorized for any alternate equipment. [District Rule 2201] Federally Enforceable Through Title V Permit
9. This unit may be designated as a dormant emissions unit or an active emissions unit. The permittee shall notify the District's Compliance Division by US mail, email or Fax upon redesignating the unit. [District Rule 1070]
10. When designated as a dormant emissions unit the fuel supply line shall be physically disconnected from the emissions unit. [District Rules 4305 and 4306]
11. When designated as a dormant emissions unit, the permittee shall not be required to perform source testing or monitoring requirements otherwise required by this permit. [District Rules 4305 and 4306]
12. A source test to demonstrate compliance with the NO_x and CO emission limits shall be performed within 60 days of recommencing operation of the dormant emissions unit. [District Rules 4305 and 4306]
13. All required source testing shall conform to the compliance testing procedures described in District Rule 1081 (Last Amended December 16, 1993). [District Rule 1081, and County Rules 108 (Kings), 108.1 (Fresno, Merced, San Joaquin, Tulare, Kern, and Stanislaus), and 110 (Madera)] Federally Enforceable Through Title V Permit
14. Copies of all fuel invoices showing quantity and delivery points of gas delivered and copies of quality terms of gas delivery contracts shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel and record specific type of noncertified fuel used. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
15. Vapor received from TEOR S-1547-359 shall be scrubbed of 95% its sulfur, or exhaust SO₂ shall be limit to less than or equal to 9 ppmv corrected to 3.0% oxygen. [District Rules 2201 and 4320] Federally Enforceable Through Title V Permit
16. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of fuel combusted in the unit shall be installed, utilized and maintained. [District Rule 2201 and 40 CFR 60.48c (g)] Federally Enforceable Through Title V Permit
17. The exhaust stack shall vent vertically upward. The vertical exhaust flow shall not be impeded by a rain cap (flapper ok), roof overhang, or any other obstruction. [District Rule 4102]
18. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.5.2] Federally Enforceable Through Title V Permit
19. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit has been demonstrated for 8 consecutive weeks for a fuel source, then the testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rules 2520, 9.4.2 and 4320] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

20. When complying with SOx emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6; or EPA Method 6B; or EPA Method 8; or ARB Methods 8 or 100; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by double GC for H₂S and mercaptans performed in the laboratory and EPA Method 19 to calculate emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rules 2520, 9.4.2 and 4320] Federally Enforceable Through Title V Permit
21. If the unit is fired on noncertified gaseous fuel and compliance with SOx emission limits is achieved through fuel sulfur content limitations, the following test methods (or other approved methods listed in this permit) shall be used; H₂S: ASTM D6228 or grab sample analysis by double GC for H₂S and mercaptans performed in the laboratory; total sulfur: ASTM 1072, D3246, D4084 or D6228; and methane content: ASTM D1945. [District Rules 2520, 9.3.2 and 4320] Federally Enforceable Through Title V Permit
22. If fuel analysis is used to demonstrate compliance with conditions of this permit, the fuel higher heating value for each fuel shall be certified by a third party fuel supplier or determined by ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.4.2; 4305, 6.2.1; 4306, 6.2.1; 4320, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
23. Compliance with permit conditions in the Title V permit shall be deemed compliance with the requirements of County Rules 108 (Kings), 108.1 (Fresno, Merced, San Joaquin, Tulare, Kern, and Stanislaus), 110 (Madera) 402 (Madera), 404 (Fresno, Kern, Tulare, Kings, Stanislaus, Merced, and San Joaquin), 405 (Madera), 408 (Fresno, Kern, Tulare, Kings, Stanislaus, Merced, and San Joaquin), 407.2 (Kern, Tulare, Kings, Stanislaus, and San Joaquin), and 408.2 (Merced). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
24. Compliance with permit conditions in the Title V permit shall be deemed compliance with the following requirements of SJVUAPCD Rules 4201 (Amended December 17, 1992), 4301 (Amended December 17, 1992), 4406 (Amended December 17, 1992, and Rule 4801 (Amended December 17, 1992). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
25. Compliance with permit conditions in the Title V permit shall be deemed compliance with the requirements of 40 CFR 60, Subpart Dc (except 60.44c(g) and (h) and 60.48c). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
26. This unit has not been used to produce electricity for sale in 1985 or on or after November 15, 1990. Therefore, the requirements of 40 CFR 72.6(b) do not apply to this source. A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
27. Steam generator shall be operated at no greater than 1,466.7 MMBtu hhw/day heat input. [District Rule 2201] Federally Enforceable Through Title V Permit
28. Only natural gas or a combination of natural gas and scrubbed non-condensable gas from sulfur scrubbing system(s) S-1547-359 shall be used as fuel in this steam generator. [District Rule 2201] Federally Enforceable Through Title V Permit
29. The total fuel burned in this unit shall be less than 50% by volume PUC quality natural gas determined on a calendar month basis. PUC quality natural gas is any gaseous fuel where the sulfur content is no more than one-fourth (0.25) grain of hydrogen sulfide per one hundred (100) standard cubic feet, no more than five (5) grains of total sulfur per one hundred (100) standard cubic feet, and at least 80% methane by volume. [District Rule 4320] Federally Enforceable Through Title V Permit
30. Permittee shall maintain records of higher heating value and daily quantity of natural gas and vapor recovery gas burned in this steam generator. [District Rule 2201] Federally Enforceable Through Title V Permit
31. When fired exclusively on natural gas, emissions from this unit shall not exceed 0.002 lb-SO_x/MMBtu (as SO₂) [District Rules 2201, 2520, 4201, 4301, 4406, 4801] Federally Enforceable Through Title V Permit
32. Emissions from this unit shall not exceed 0.005 lb-PM₁₀/MMBtu. [District Rules 2201, 4201, and 4301] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

33. Emission rates, except during startup, shutdown, and refractory curing shall not exceed any of the following: VOC: 0.003 lb/MMBtu, NOx (as NO₂): 0.018 lb/MMBtu or 15 ppmv @ 3% O₂, or CO: 0.030 lb/MMBtu or 40 ppmv @ 3% O₂. [District Rules 2201, 2520, 4301, 4305, 4306, 4405, and Kern County Rule 425] Federally Enforceable Through Title V Permit
34. Emission rates during startup, shutdown and refractory curing shall not exceed: particulate matter - 10 pounds per hour, or 0.1 grains/dscf calculated to 12% CO₂; sulfur - 200 pounds of SO₂ per hour, or 2000 ppmv as SO₂, or 0.11 pounds sulfur (as S) per MMBtu on average-wide basis for all units in Rule 4406 plan; NO₂ - 140 pounds per hour or 0.14 pounds per MMBtu. [District Rules 4101, 4102, 4301, 4405, 4406, 4801 and Kern County Rules 424 and 425] Federally Enforceable Through Title V Permit
35. Emission rates shall not exceed any of the following: PM₁₀: 7.3 lb/day, VOC: 4.4 lb/day, NOx (as NO₂): 52.8 lb/day or 9636 lb/year, or CO: 44.0 lb/day [District Rule 2201] Federally Enforceable Through Title V Permit
36. Duration of startup and shutdown (as defined in Rule 4320) shall not exceed 2 hours each per occurrence. Refractory curing period is defined as a maintenance-based reduced-load period of time during which a unit is brought from a shutdown status to staged rates of firing for the sole purpose of curing new refractory lining of the unit, and shall not exceed 30 hours per occurrence. The operator shall maintain records of the duration of start-up, shutdown, and refractory curing periods. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
37. The permittee shall monitor and record the stack concentration of NOx, CO, and O₂ at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305, 5.4.2, 4306, 5.4, and 4320] Federally Enforceable Through Title V Permit
38. If either the NOx or CO concentrations corrected to 3% O₂, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100 (amended December 17, 1992), the permittee may fully comply with Rule 1100 in lieu of the performing the notification and testing required by this condition. [District Rules 4305, 5.4.2; 4306, 5.4.2; and 4320, 5.7.1] Federally Enforceable Through Title V Permit
39. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the permit-to-operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
40. The permittee shall maintain records of: (1) the date and time of NOx, CO, and O₂ measurements, (2) the O₂ concentration in percent and the measured NOx and CO concentrations corrected to 3% O₂, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 4305, 5.4.2; 4306, 5.4.2; and 4320, 5.7.1] Federally Enforceable Through Title V Permit
41. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. Unless otherwise specified in the Permit to Operate no determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4320. For the purposes of permittee-performed alternate monitoring, emissions measurements may be performed at any time after the unit reaches conditions representative of normal operation. [District Rules 4305, 5.5.2, 4306, 5.5.2, and 4320, 5.8.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

42. Compliance with fuel sulfur limit(s) can be demonstrated either by monitoring sulfur content at location(s) after all fuel sources are combined prior to incineration, or by monitoring the sulfur content and volume of each fuel source and performing mass balance calculations. Records of monitoring locations, detected sulfur concentrations, and mass balance calculations, if necessary, shall be maintained and kept onsite and made readily available for District inspection upon request. [District Rule 4320] Federally Enforceable Through Title V Permit
43. Source testing to measure natural gas-combustion NO_x and CO emissions from this unit shall be conducted within 60 days of initial startup and at least once every twelve (12) months (no more than 30 days before or after the required annual source test date). After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months (no more than 30 days before or after the required 36-month source test date). If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 2201, 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
44. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
45. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
46. The following test methods shall be used: NO_x (ppmv) - EPA Method 7E or ARB Method 100, NO_x (lb/MMBtu) - EPA Method 19, CO (ppmv) - EPA Method 10 or 10B or ARB Method 100, stack gas oxygen - EPA Method 3 or 3A or ARB Method 100, SO_x (lb/MMBtu) - ARB Method 8 or 100 or EPA Method 6, 6B or 8 or fuel gas sulfur content analysis and EPA Method 19, fuel gas sulfur content - ASTM D1072, D4468, D3246, D3246, D4084 or double GC for H₂S and mercaptans performed in laboratory, fuel gas hhv - ASTM D1826 or D1945 in conjunction with ASTM D3588. [District Rule 1081, 4305, 6.2, 4306, and 4320] Federally Enforceable Through Title V Permit
47. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
48. Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NO_x emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NO_x emission limit listed in Rule 4320. [District Rule 4320] Federally Enforceable Through Title V Permit
49. Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320] Federally Enforceable Through Title V Permit
50. All records shall be maintained for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 2201, 1070, 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
51. Formerly S-1511-66